


High Power LED Highbay Light Series (80W to 400W)

Upto 5 years warranty!

Industrial Lighting

LUXWERX

LED Highbay Light Series

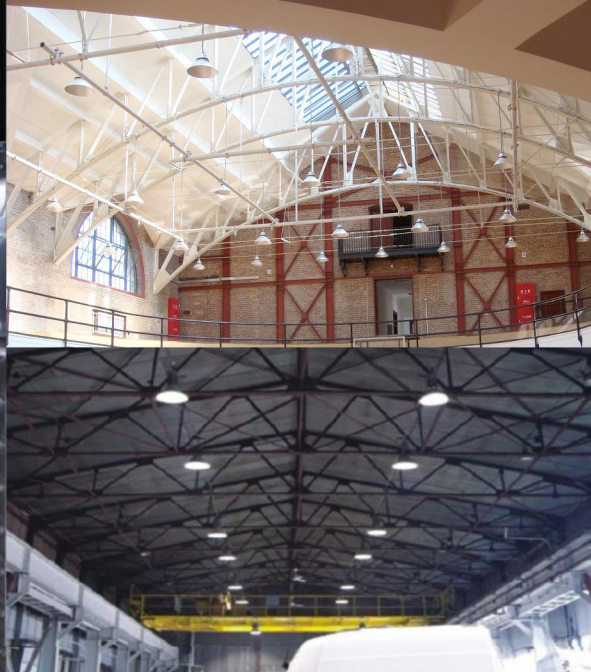

Key Features

- LEDs from Philips Lumileds, LG, CREE or Osram, together with Meanwell drivers, provide up to 5 years warranty.
- Unique patented thermal management design to ensure low LED junction temperature
- Extremely light weight to enhance the safety use and installation.
- Available products with maximum power up to 400W, ultra-high luminous output of up to 40,000lm.
- Both IP40 and IP65, prismatic and aluminium reflectors with different optical beam angles are available.
- Easy installation and maintenance, dust prevention, longer lifetime with high lumen maintenance.

Applications

Suitable for Warehouses, Production and logistics, Retail stores, Theme restaurants, Amusement parks, Indoor stadiums and public places, and other industrial and commercial lighting purposes.

Patented



Design Innovation

Build-in Heatpipe technology

- excellent heat conduction performance by incorporating mature heatpipe technology inside the heatsink
- phase change materials (PCM) inside the heatpipe helps to effectively bring the heat away from LED module

Fold-Fin Heatsink (FFH) technology

- formed by thin aluminum sheets and pressed into the desired fin structures by fully automated machines
- different parts of heatsink are then soldered together via a high temperature furnace
- resulting in a heatsink with large total surface area and extremely light weight

Extra-safe fixture design

- additional stainless steel sling provides extra safe mechanism especially for vibrating environment
- build-in bolt design to strongly bond together different housing parts

LED vs Metal Halide Replacement Table

LED High Bay Light	Metal Halide High Bay Light
80W	150W
100W / 150W	250W
200W / 250W	400W
300W / 350W	750W
400W	1000W

60% Energy Saving !

LED ➡ Metal Halide

80W LED Highbay



Model No.: HB-080

Light Source *: Philips Lumileds / Cree / Osram
 Supply Voltage : 90-305 VAC, 50/60 Hz
 LED Power : 80 W
 System Power : 90 W
 Luminous Flux*: 8100 lm
 Beam Angle : PC / 80° / 100° / 120°
 CCT : 3000K-7000K
 Typical CRI ^: 70
 Lifespan: 50,000 hrs
 Operating Temp. : -40 to +45°C
 Weight : ~5.6 kg



Dimensions and Illumination Data**

M	LUX	ΦCM
4	645	671
6	286	1007
8	461	1342
10	103	1678

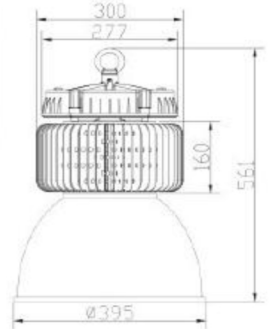

* Please contact our sales for detailed LED information
 # Test data with LUXEON Rebel ES LED at 5500K, PC reflector
 ^ Higher CRI available upon request
 ** Other beam angles available upon request

Industrial Lighting

LUXWEX

100W LED Highbay



Model No.: HB-100

Light Source *: Philips Lumileds / Cree / Osram
 Supply Voltage : 90-305 VAC, 50/60 Hz
 LED Power : 100W
 System Power : 110 W
 Luminous Flux *: 9800 lm
 Beam Angle : PC / 80° / 100° / 120°
 CCT : 3000K-7000K
 Typical CRI ^: 70
 Lifespan: 50,000 hrs
 Operating Temp. : -40 to +45°C
 Weight : ~6.5 kg



Dimensions and Illumination Data**

M	LUX	ΦCM
4	753	671
6	334	1007
8	189	1342
10	120	1678



Industrial Lighting

LUXWEX

150W LED Highbay

DESIGNLIGHTS
CONSORTIUM





Model No.: HB-150

Light Source *: Philips Lumileds / Cree / Osram
Supply Voltage : 90-305 VAC, 50/60 Hz
LED Power : 150W
System Power : 165 W
Luminous Flux*: 15000 lm
Beam Angle : PC / 80° / 100° / 120°
CCT : 3000K-7000K
Typical CRI ^ : 70
Lifespan: 50,000 hrs
Operating Temp. : -40 to +45°C
Weight : ~7.0 kg

Dimensions and Illumination Data**

M	LUX	ΦCM
4	1128	671
6	501	1007
8	282	1342
10	179	1678

BEAM ANGLE=90x90 DEG



† Please contact our sales for detailed LED information
Test data with LUXEON Rebel ES LED at 5500K, PC reflector
^ Higher CRI available upon request
** Other beam angles available upon request

Industrial Lighting

LUXWEXX

200W LED Highbay

DESIGNLIGHTS
CONSORTIUM





Model No.: HB-200

Light Source *: Philips Lumileds / Cree / Osram
Supply Voltage : 90-305 VAC, 50/60 Hz
LED Power : 200W
System Power : 220 W
Luminous Flux*: 19800 lm
Beam Angle : PC / 80° / 100° / 120°
CCT : 3000K-7000K
Typical CRI ^ : 70
Lifespan: 50,000 hrs
Operating Temp. : -40 to +45°C
Weight : ~8.0 kg

Dimensions and Illumination Data**

M	LUX	ΦCM
4	999	1385
6	443	2078
8	249	2771
10	160	3464

BEAM ANGLE=120x120 DEG



Industrial Lighting

LUXWEXX

250W LED Highbay


Model No.: HB-250

Light Source *: Philips Lumileds / Cree / Osram
 Supply Voltage : 90-305 VAC, 50/60 Hz
 LED Power : 250 W
 System Power : 280 W
 Luminous Flux *: 25200 lm
 Beam Angle : PC / 80° / 100° / 120°
 CCT : 3000K-7000K
 Typical CRI ^: 70
 Lifespan: 50,000 hrs
 Operating Temp. : -40 to +45°C
 Weight : ~9.0 kg





Dimensions and Illumination Data**

M	LUX	ΦCM
4	1249	1385
6	554	2078
8	311	2771
10	201	3464



BEAM ANGLE=120x120 DEG



* Please contact our sales for detailed LED information
 # Test data with LUXEON Rebel ES LED at 5500K, PC reflector
 ^ Higher CRI available upon request
 ** Other beam angles available upon request

Industrial Lighting

LUXWERX

300W LED Highbay

Model No.: HB-300

Light Source *: Philips Lumileds / Cree / Osram
 Supply Voltage : 90-305 VAC, 50/60 Hz
 LED Power : 300W
 System Power : 330 W
 Luminous Flux *: 29700 lm
 Beam Angle : PC / 80° / 100° / 120°
 CCT : 3000K-7000K
 Typical CRI ^: 70
 Lifespan: 50,000 hrs
 Operating Temp. : -40 to +45°C
 Weight : ~15 kg





Dimensions and Illumination Data**

M	LUX	ΦCM
4	1481	953
6	657	1430
8	369	1906
10	238	2383



BEAM ANGLE=106x109 DEG



Industrial Lighting

LUXWERX

350W LED Highbay

Model No.: HB-350



Light Source *: Philips Lumileds / Cree / Osram
 Supply Voltage : 90-305 VAC, 50/60 Hz
 LED Power : 350W
 System Power : 390 W
 Luminous Flux *: 35100 lm
 Beam Angle : PC / 800 / 1000 / 1200
 CCT : 3000K-7000K
 Typical CRI *: 70
 Lifespan: 50,000 hrs
 Operating Temp. : -40 to +45°C
 Weight : ~15.5 kg



Dimensions and Illumination Data**

M	LUX	ΦCM
4	1776	953
6	788	1430
8	444	1906
10	284	2383

BEAM ANGLE=100x100 DEG



* Please contact our sales for detailed LED information
 # Test data with LUXEON Rebel ES LED at 5500K, PC reflector
 ^ Higher CRI available upon request
 ** Other beam angles available upon request

Industrial Lighting

LUXWEX

400W LED Highbay

Model No.: HB-400



Light Source *: Philips Lumileds / Cree / Osram
 Supply Voltage : 90-305 VAC, 50/60 Hz
 LED Power : 400W
 System Power : 440 W
 Luminous Flux *: 38000 lm
 Beam Angle : PC / 80° / 100° / 120°
 CCT : 3000K-7000K
 Typical CRI *: 70
 Lifespan: 50,000 hrs
 Operating Temp. : -40 to +45°C
 Weight : ~15.5 kg



Dimensions and Illumination Data**

M	LUX	ΦCM
4	2009	953
6	892	1430
8	500	1906
10	320	2383





BEAM ANGLE=100x100 DEG



Industrial Lighting

LUXWEX


Thermal Performance of LED Highbay Light

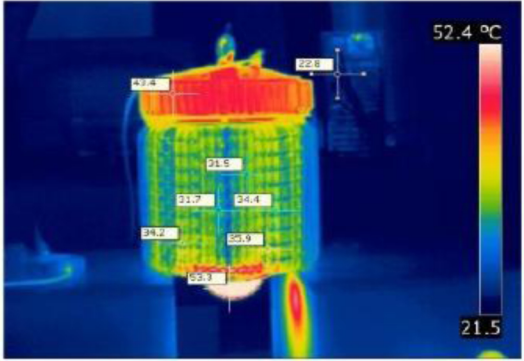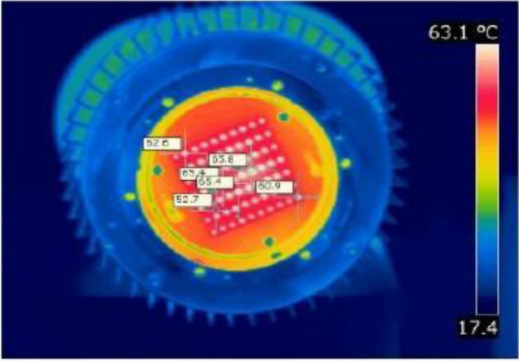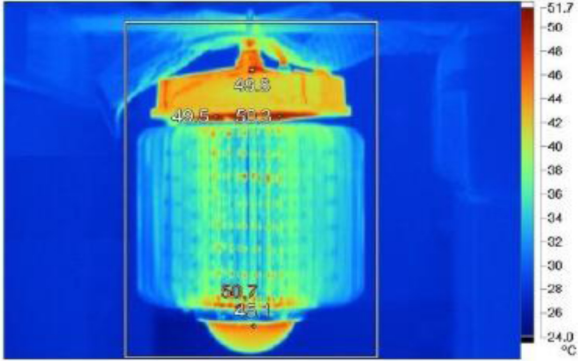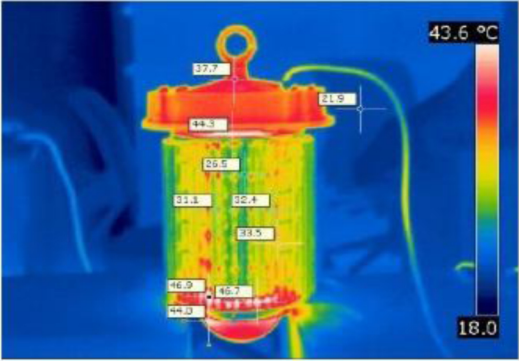

* All of our products are designed for superior thermal performance to ensure long lifetime operation.

LED Highbay Light with External Sensors

All our LED high bay lights (dimmable version) are available for connection to external motion/occupancy sensors or daylight sensors.

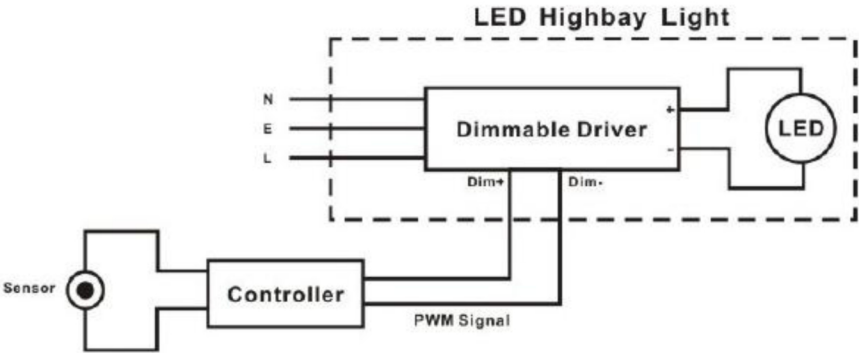

Schematic Circuit Diagram

Installation Height Guideline



LED High Bay Light Power

Remark:

- Above suggested installation height is for reference only.
- The actual ground illumination level depends on lighting layout such as luminaire separation and surrounding objects.

LED Highbay Light Product Summary

Model No.	Reflector Type	LED Light Source	Color Temp.	Dimming Control	IP Rating	Previous Model No. (on or before 2012)
LUX-HB-080	PC	Philips Lumileds LUXEON Series	4000K	Dimmable (PWM input) (1-10V input)	IP40	LM-300
LUX-HB-100	80°		5000K		IP65	LM-301
LUX-HB-150	100°	Osram OSLOX Series	6000K	Non-dimmable		LM-302
LUX-HB-200	120°					LM-303
LUX-HB-250		Cree XTE / XP Series				LM-313
LUX-HB-300						LM-304
LUX-HB-350	LG 3535 High Power Series	LM-305				
LUX-HB-400		LM-306				

Note:

- (1) Other color temperature available upon request
- (2) LED Highbay Light at 30W-60W available upon request.
- (3) For North America market, add prefix "LM" to each model numbers, i.e. LM-LUX-HB-080, etc.
- (4) Design Lights Consortium (DLC) approved models: LM-LUX-HB-150, LM-LUX-HB-200 and LM-LUX-HB-400

Accessories Order Information

Item	Item Photo	Order Code
PC reflector		001101
80° Aluminium reflector		001102
100° Aluminium reflector		001103
120° Aluminium reflector		001104

Item	Item Photo	Order Code
Bottom glass cover		001202
Frosted LED module cover		001301

Industrial Lighting
LUXWERX