

MODEL: PL1X4UCCTW3

SKU: 500814UCCTW3-DC12V

1x4 LED PANEL LIGHT

ELAKEVIEW ENTERPRISE LTD.

PRODUCT DESCRIPTION

The Elakeview LED Panel light provides high lumen efficacy and energy savings to projects in low ceiling applications. This panel light is an excellent energy efficient replacement for fluorescent fixture.



HIGHLIGHTS



- AC120-347V
- Color Temperature Selectable: 3500/4000/5000K
- Wattage Selectable: 25/30/40W
- Efficacy: 112 LM/W
- CRI>80
- 0-10V continuous dimming
- Receptacle for Bluetooth sensor
- L70-50,000 hours
- Ultra-thin, Seamless Aluminum Frame
- PMMA Non-Yellowing Frosted Lens
- DLC 5.1, cUL Listed
- 7 Years Warranty.
- Extended Warranty Available



APPLICATIONS

Designed for use in offices, schools, health care spaces, retail stores and more.

ORDERING INFORMATION

ORDER SKU	DLC MODEL#	DLC PRODUCT ID	CRI	INPUT VOLTAGE	POWER	EFFICACY	DELIVERED LUMENS	CCT	FINISH	SIZE
500812UCCTW3-DC12V	PL2X2UCCTW3	PLO3QN2Z6KRN	>80	AC120-347V	25/30/40W	114LM/W	2750/3300/4400LM	3500/4000/5000K	WHITE	2x2FT
500812UCCTW4	PL2X2UCCTW4	S-4KN3T5	>80	AC120-347V	25/30/40W	114LM/W	3125/3750/5000LM	3500/4000/5000K	WHITE	2x2FT
500814UCCTW3-DC12V	PL1X4UCCTW3	PLJQJD5T2GP7	>80	AC120-347V	25/30/40W	112LM/W	2750/3300/4400LM	3500/4000/5000K	WHITE	1x4FT
500814UCCTW4	PL1X4UCCTW4	S-K5466S	>80	AC120-347V	25/30/40W	112LM/W	3125/3750/5000LM	3500/4000/5000K	WHITE	1x4FT
500816UCCTW3-DC12V	PL2X4UCCTW3	PLQOFSCVYJGN	>80	AC120-347V	30/40/50W	115LM/W	3300/4400/5500LM	3500/4000/5000K	WHITE	2x4FT
500816UCCTW4	PL2X4UCCTW4	S-CNF3BQ	>80	AC120-347V	30/40/50W	125LM/W	3750/5000/6250LM	3500/4000/5000K	WHITE	2x4FT

REV 1

1x4 LED PANEL LIGHT

ELAKEVIEW ENTERPRISE LTD.

PRODUCT FEATURE


- AC120-347V
- Wattage selectable: 25/30/40W
- Color temperature Selectable: 3500/4000/5000K
- Efficacy - 115 LM/W
- CRI>80
- Operating temperature:-20 to 40°C
- 0-10V Dimmable, Flicker-Free Driver
- PMMA Non-Yellowing Frosted Lens
- Unique Heat Dissipation Design
- Receptable for Bluetooth sensor
- Seismic Clips Included
- High Shock and Vibration Resistance
- Embed/Suspension/Ceiling-mount
- DLC 5.1, cUL Listed
- L70 - 50000 hours
- 7 Years Warranty. Extended Warranty Available

PRODUCT SPECIFICATIONS

LED TYPE	WATTS	SYSTEM EFFICACY	LUMENS	COLOR TEMP	BEAM ANGLE	CRI	VOLTAGE	POWER FREQ	POWER EFFICIENCY	POWER FACTOR	THD
SEOUL	25/30/40W	155LM/W	2750/3300/4400LM	3500/4000/5000K	120°	82	AC120-347V	50/60HZ	>.95	>.90	<13.4%

DIMENSIONS

Length: 11.7" 29.8CM
Width: 4.6" 120.9CM
Depth: 1.2" 3.0CM

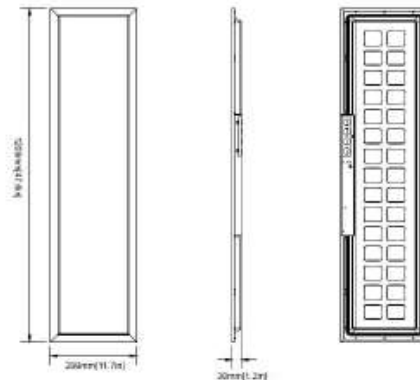

MOUNTING OPTIONS

					
SUSPENSION KIT		SURFACE MOUNT KIT		DRYWALL FRAME KIT	
SKU	HangingKits	SKU	900018-1x4-BL	SKU	900018-1x4-FRAME

OPTIONAL ACCESSORIES

			
347V QUICK CONNECTOR		PIR BLUETOOTH SENSOR	
SKU	STN 68869	SKU	SENPIRBT-ANT1P4TBLE

REV 1


1x4 LED PANEL LIGHT

ELAKEVIEW ENTERPRISE LTD.


PHOTOMETRIC INFORMATION

Fixture Output: Rated Lumens/Lamp: 4400.0
 Zonal lumens in the 0-60° zone (%) 78.0 Input
 Wattage: 40
 Beam Angle (°) 113.9
 Center Beam Candle Power (cd): 1792


ISOFOOTCANDLE PLOT

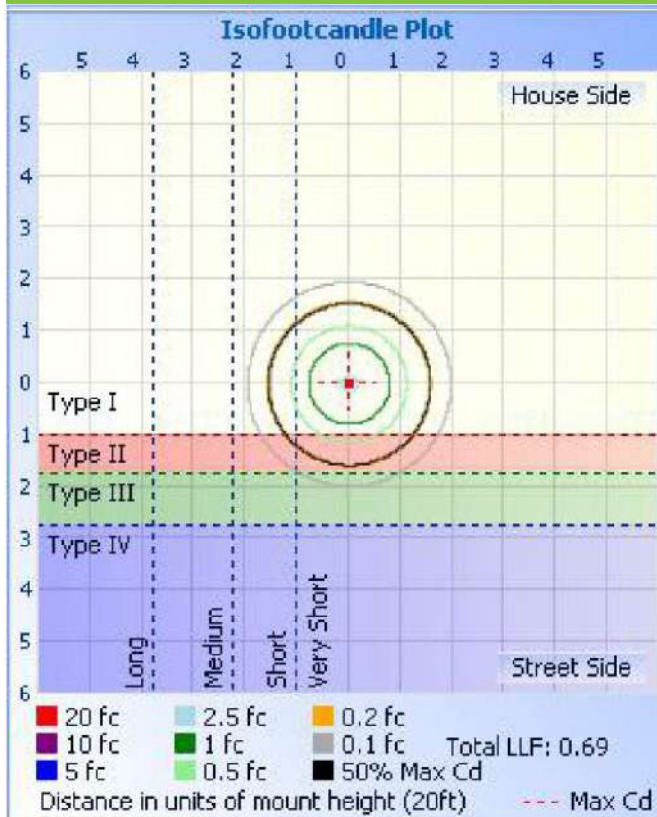

POLAR CANDELA DISTRIBUTION

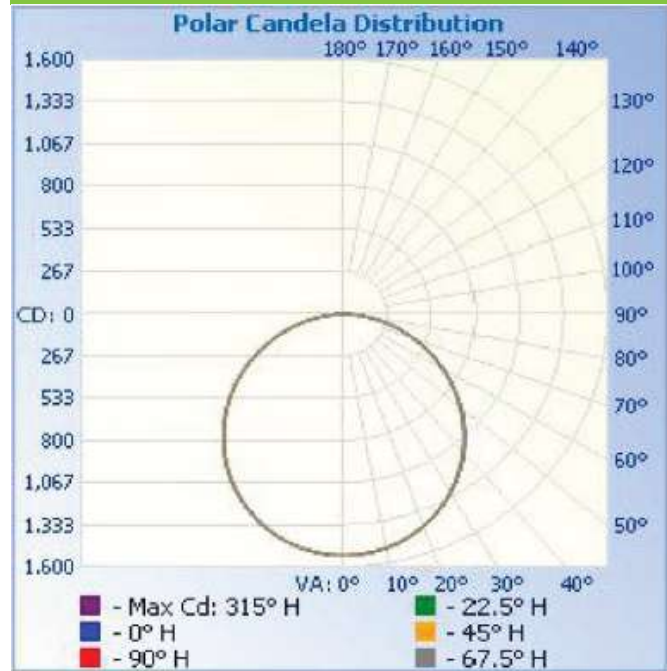

ISOCANDELA PLOT

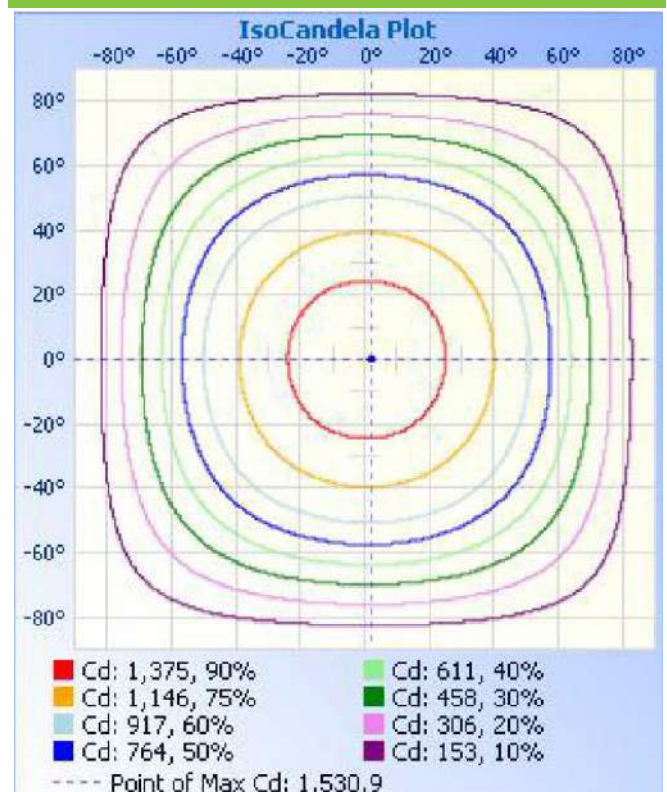

ILLUMINANCE AT A DISTANCE

