

MODEL: PL2X4UCCTW3

SKU: 500816UCCTW3-DC12V

2x4 LED PANEL LIGHT

ELAKEVIEW ENTERPRISE LTD.

PRODUCT DESCRIPTION

The Elakeview LED Panel light provides smooth and modern appearance with a sleek extruded aluminum housing. It has universal power input from AC120-347V, field CCT/wattage selectable feature, and integrated receptacle for PIR/Bluetooth sensor that satisfies all high quality required interior lighting projects.

Receptacle f/PIR BT Sensor



HIGHLIGHTS

- AC120-347V
- Color Temperature Selectable: 3500/4000/5000K
- Wattage Selectable: 30/40/50W
- Efficacy: 115 LM/W
- CRI>80
- 0-10V continuous dimming
- Receptacle for Bluetooth sensor
- Ultra-thin, Seamless Aluminum Frame
- PMMA Non-Yellowing Frosted Lens
- DLC, cUL Listed
- L70-50,000 hours
- 7 Years Warranty.
- Extended Warranty Available



APPLICATIONS

Designed for use in offices, schools, health care spaces, retail stores and more.

ORDERING INFORMATION

ORDER SKU	DLC MODEL#	CRI	INPUT VOLTAGE	POWER	EFFICACY	DELIVERED LUMENS	CCT	FINISH	SIZE
500812UCCTW3-DC12V	PL2X2UCCTW3	82	AC120-347V	25/30/40W	114LM/W	2750/3300/4400LM	3500/4000/5000K	WHITE	2x2FT
500812UCCTW4	PL2X2UCCTW4	82	AC120-347V	25/30/40W	114LM/W	3125/3750/5000LM	3500/4000/5000K	WHITE	2x2FT
500814UCCTW3-DC12V	PL1X4UCCTW3	82	AC120-347V	25/30/40W	112LM/W	4400/3300/2750LM	3500/4000/5000K	WHITE	1x4FT
500814UCCTW4	PL1X4UCCTW4	83	AC120-347V	25/30/40W	112LM/W	3125/3750/5000LM	3500/4000/5000K	WHITE	1x4FT
500816UCCTW3-DC12V	PL2X4UCCTW3	82	AC120-347V	30/40/50W	115LM/W	3300/4400/5500LM	3500/4000/5000K	WHITE	2x4FT
500816UCCTW4	PL2X4UCCTW4	83	AC120-347V	30/40/50W	125LM/W	3750/5000/6250LM	3500/4000/5000K	WHITE	2x4FT

2x4 LED PANEL LIGHT

ELAKEVIEW ENTERPRISE LTD.

PRODUCT FEATURE

- AC120-347V
- Wattage selectable: 30/40/50W
- Color temperature Selectable: 3500/4000/5000K
- Efficacy - 115 LM/W
- CRI>80
- Operating temperature:-20 to 40°C
- 1-10V Dimmable, Flicker-Free Driver
- PMMA Non-Yellowing Frosted Lens
- Receptacle for Bluetooth sensor
- Seismic Clips Included
- Ultra-thin, Seamless Aluminum Frame
- High Shock and Vibration Resistance
- Embed/Suspension/Ceiling-mount
- L70-50000 hours
- DLC 5.1, cUL Listed



7 Years Warranty. Extended Warranty Available

PRODUCT SPECIFICATIONS

LED TYPE	WATTS	EFFICACY	LUMENS	COLOR TEMP	BEAM ANGLE	CRI	VOLTAGE	POWER FREQ	POWER EFFICIENCY	POWER FACTOR	THD	OPERATING TEMP
SEOUL	25/30/40W	114LM/W	4560LM	3500/4000/5000K	120°	82	AC120-347V	50/60HZ	86%-87%	>.95	<13.4%	-20 to 40°C

DIMENSIONS

Length: 47.6" 120.9CM
Width: 23.7" 60.2CM
Depth: 1.2" 3.0CM

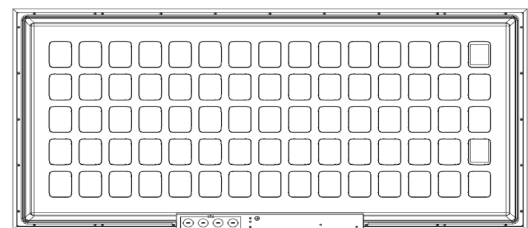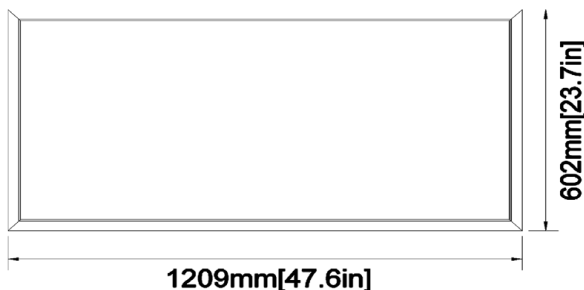

30mm[1.2in]

MOUNTING OPTIONS

					
SUSPENSION KIT		SURFACE MOUNT KIT		DRYWALL FRAME KIT	
SKU	HangingKits	SKU	900018-2X4-BL	SKU	900018-2X4-FRAME

OPTIONAL ACCESSORIES

			
347V QUICK CONNECTOR		PIR BLUETOOTH SENSOR	
SKU	STN 68869	SKU	SENPIRBT-ANT1P4TBLE

REV 1

LED PANEL LIGHT




2x4 LED PANEL LIGHT

ELAKEVIEW ENTERPRISE LTD.


PHOTOMETRIC INFORMATION

Fixture Output: Rated Lumens/Lamp: 5235.3
 Zonal lumens in the 0-60° zone (%) 78.0 Input
 Wattage: 40
 Beam Angle (°) 113.9
 Center Beam Candle Power (cd): 1792


ISOFOOTCANDLE PLOT

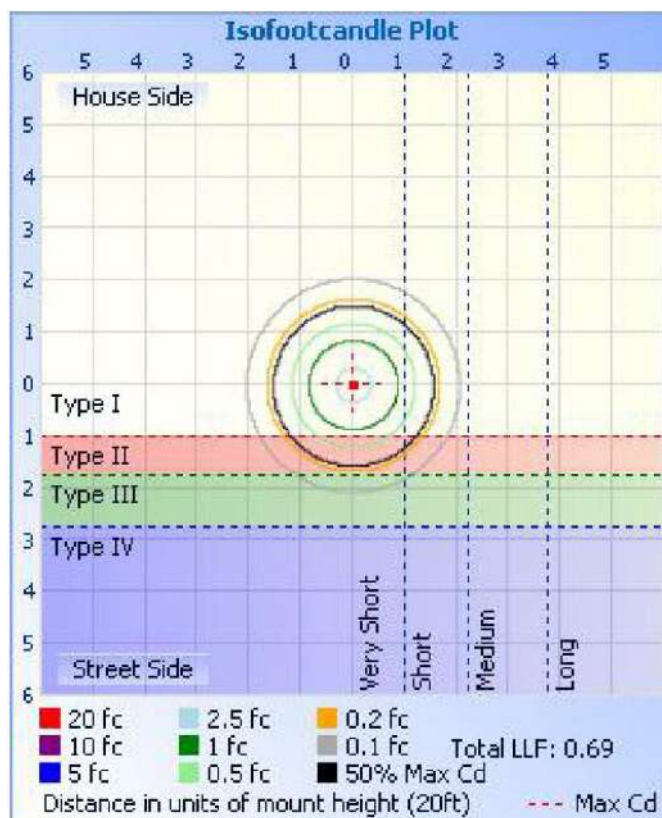


ILLUMINANCE AT A DISTANCE

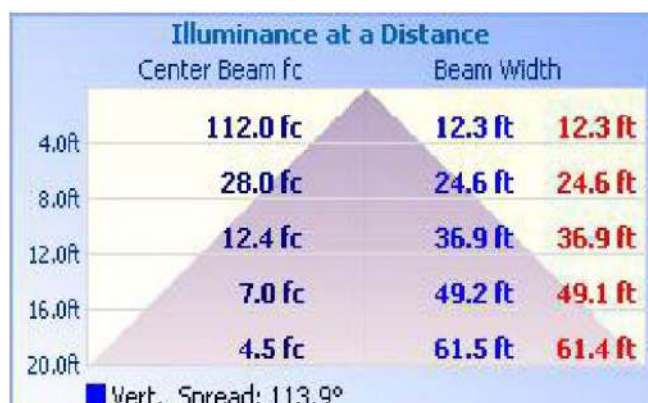

POLAR CANDELA DISTRIBUTION

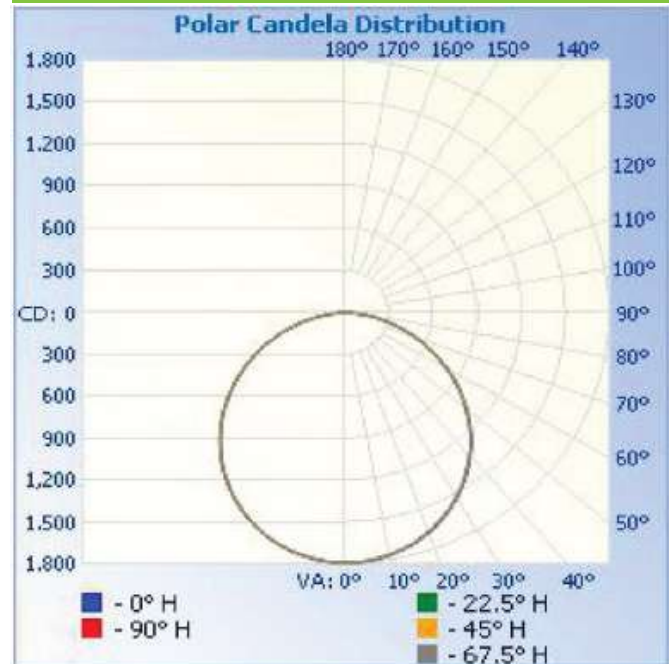

ISOCANDELA PLOT

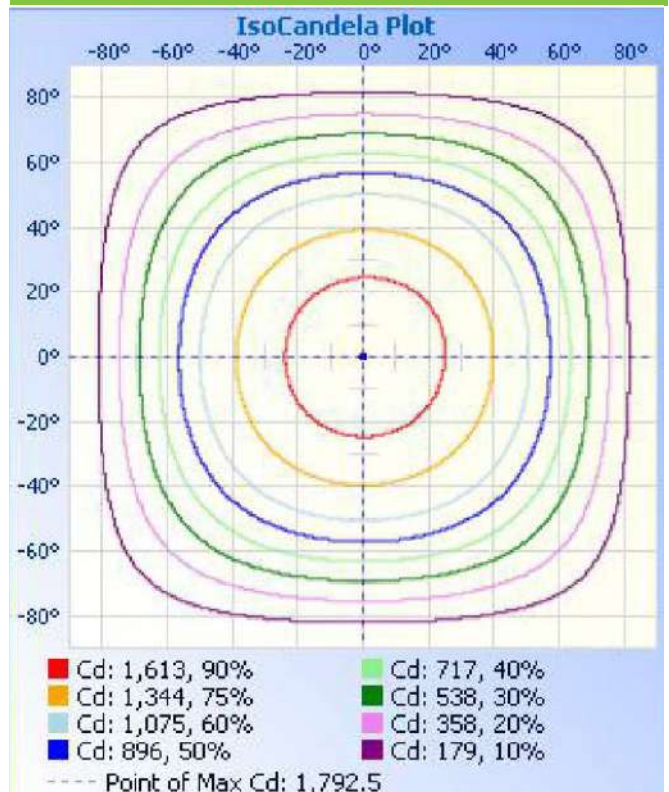

REV 1