

# SPEKTRUM+ SERIES

## Smart 120V AC Outdoor Outlet Plug


The Spektrum+ outdoor outlet plug is perfect for outdoor lighting that requires a 120V AC receptacle. Remotely set timers, schedules, countdowns, shared control, or scene setting through the Spektrum+ Smart App for added features to existing outdoor lighting. With two receptacles, 15A capacity, and an IP44 outdoor rating, this outdoor outlet plug is the perfect addition to a Spektrum+ Smart Home.

- Control standard, outdoor line-voltage plug-in appliances via the Spektrum+™ Smart App
- Set schedules for home automation
- IP44 waterproof design
- Built with ABS fireproof material
- 125V, 15A 1875W output with 2x receptacles
- 15cm cable length
- Plugs into standard 120V AC receptacle
- cETLus Listed, FCC Compliant
- Smart Plug must be paired with the Spektrum+™ Smart app for App control

|                 |
|-----------------|
| PROJECT:        |
| TYPE:           |
| LOCATION:       |
| CATALOG NUMBER: |




### SPEKTRUM+ SMART OUTDOOR OUTLET PLUG DIMENSIONS

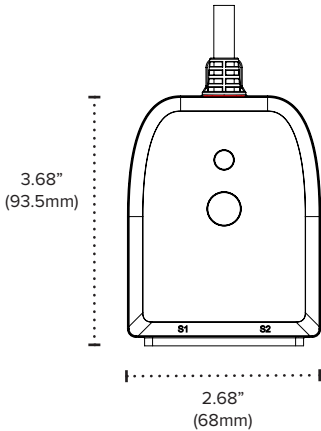

### SPEKTRUM+ SMART OUTDOOR OUTLET PLUG QUICK SPECS

|                |                                            |
|----------------|--------------------------------------------|
| VOLTAGE        | 120V AC                                    |
| CAPACITY       | 15A 1875W                                  |
| CERTIFICATIONS | cETLus Listed, FCC Compliant, IP44 Outdoor |

### SPEKTRUM+ SMART OUTDOOR OUTLET PLUG QUICK SET-UP

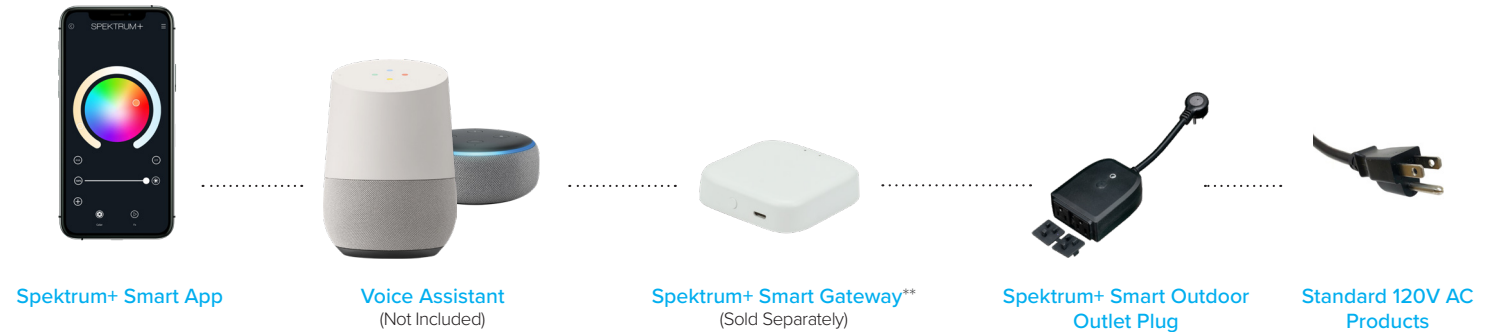

**\*\*Spektrum+ Smart Gateway** Required for automation features and use with voice assistants

SPEKTRUM+ SMART OUTDOOR OUTLET PLUG ORDERING INFORMATION

| ITEM NUMBER         | DESCRIPTION               | FINISH | INPUT   | CAPACITY  |
|---------------------|---------------------------|--------|---------|-----------|
| SPKPL-ODOP-120V-15A | Smart Outdoor Outlet Plug | Black  | 120V AC | 15A 1875W |

SPEKTRUM+ ACCESSORIES

| ITEM NUMBER        | DESCRIPTION                                 |
|--------------------|---------------------------------------------|
| SPKPL-CTRL-W-RGBTW | Spektrum+ Bluetooth® Controller             |
| SPKPL-GTWY-T-W     | WiFi + Bluetooth® Smart Gateway*            |
| SPKPL-GTWY-T-E     | Ethernet & WiFi + Bluetooth® Smart Gateway* |

\*Gateway recommended for use in every Spektrum+ application for full app functionality.



SPKPL-CTRL-W-RGBW



SPKPL-GTWY-T-W



SPKPL-GTWY-T-E

SPEKTRUM+ NOTES

**CONTROLLING THE FIXTURE:** The attached LED controller/receiver utilizes Bluetooth Wireless Technology and can be controlled via the Spektrum+ Smart Lighting App and/or the Spektrum+ Smart Switch (SPKPL-CTRL-W-RGBTW - sold separately). It is not intended to be used with a standard dimmer switch.

**DISTANCE OF CONTROL CAPABILITY:** 25 meters (approx. 80ft)

**RESET THE DEVICE:** Power the device ON and OFF x 3 times in succession. The device will pulse BLUE once reset and ready to be paired. It is recommended to ensure product is installed on a circuit with a standard main switch to enable power ON/OFF if override is necessary.

**USING THE SPEKTRUM+ SMART LIGHTING APP:** Please follow the Spektrum+ Smart Lighting App guide.

SPEKTRUM+ SIGNAL ATTENUATION

All claims related to signal distance are based on clear line of sight. Any obstacles impeding direct line of sight will significantly reduce the effective distance of the product. Increasing density and thickness of obstacles will further decrease the signal distance.

Material Interference Table

| MATERIAL | POTENTIAL FOR RANGE REDUCTION |
|----------|-------------------------------|
| Wood     | Low                           |
| Glass    | Low                           |
| Brick    | Medium                        |
| Marble   | Medium                        |
| Plaster  | High                          |
| Concrete | High                          |
| Metal    | Very High                     |

Best practices/troubleshooting tactics include:

- Devices using the same RF band can interfere with each other’s communication. Though they cannot communicate directly, they may be able to inject noise into another system. If you experience this, the best practice is move the inadvertent receiver(s)/transmitter(s) to an alternate location or to place a barrier between the inadvertent receiver(s)/transmitter(s).
- If a receiver must be moved out of sight, make sure that the receiver is not fully enclosed and that the receiver is placed as close to the opening as possible. The signal will be able to be reflected around a corner at reduced strength.
- If an antenna is used, the signal is strongest in directions perpendicular to the direction the antenna is pointing.
- A cellphone camera can be used to test if an IR remote is transmitting a signal. Even though the infrared band is invisible to humans, the cellphone camera will pick up the IR light and display it on the screen as either a red or white light. If pressing a button does not show a light on the cellphone screen, the batteries are most likely dead and need to be replaced.

**SPEKTRUM+ MAXIMUM CONSIDERATIONS (IN APP)**

| ITEM                                 | QUANTITY               |
|--------------------------------------|------------------------|
| SIMULTANEOUS LOGINS PER ACCOUNT      | 200                    |
| DEVICES IN (1) APP ACCOUNT           | 20 homes * 200 devices |
| HOMES PER ACCOUNT                    | 20                     |
| DEVICES IN A NETWORK/FAMILY/HOME     | 200                    |
| MEMBERS PER HOME                     | 20                     |
| ROOMS PER HOME                       | 20                     |
| DEVICES PER ROOM                     | 50                     |
| DEVICES PER GROUP                    | 100                    |
| DEVICE GROUPS PER HOME               | 20                     |
| DEVICES LINKED TO A SINGLE GATEWAY   | 128                    |
| DEVICES LINKED TO A SINGLE REMOTE    | 40                     |
| SCHEDULES PER DEVICE                 | 30                     |
| SCENES IN A HOME                     | 100                    |
| AUTOMATIONS IN A HOME                | 100                    |
| ACTIONS IN A SCENE                   | 150                    |
| ACTIONS IN A AUTOMATION SCENE        | 150                    |
| CONDITIONS IN AN AUTOMATION SCENE    | 10                     |
| USER THAT CAN SHARE A DEVICE GROUP   | 20                     |
| USERS THAT CAN SHARE A SINGLE DEVICE | 20                     |
| HOMES THAT (1) APP ACCOUNT CAN JOIN  | 20                     |



# AMERICAN LIGHTING WARRANTY

## LIMITED WARRANTY FOR LED PRODUCTS: 3 YEARS

### LIMITED PRODUCT WARRANTY

Our products are warranted to be free from defects in material and workmanship for the warranty period listed. Warranty periods begin from the date of shipment from American Lighting Inc's warehouse to the original purchaser. Products that prove to be defective during their specific warranty period will be either repaired or replaced, at the sole discretion of American Lighting Inc. Claims for defective products must be submitted in writing to American Lighting Inc's RGA Department within the warranty period. Upon approval of such return, American Lighting Inc reserves the right to inspect the product for misuse or abuse. Claims for indirect or consequential damages or for product that, in American Lighting Inc's opinion, has been misused will be denied. This is a warranty of product reliability only and not a warranty of merchantability or fitness for a particular purpose. American Lighting Inc shall have no liability whatsoever in any event for payment of incidental or consequential damages, including, without limitations, installation costs and/or damages for personal injury and/or property. These products may represent a possible shock or fire hazard if improperly installed or altered in any way. This warranty does not apply to any product that has not been properly installed in accordance with current local codes and/or the National Electrical Code. Products that require a transformer, driver, or power supply must be used in conjunction with American Lighting Inc's recommended power supply to ensure safety and retain product warranty.

### PRODUCT SPECIFICATIONS

For the latest product information, updates, instructions and details concerning specifications, colors, finishes, performance, installation and design, visit [www.americanlighting.com](http://www.americanlighting.com).

Color may vary from the color printed herein due to limitations in photographic and printing processes. American Lighting Inc. reserves the right to change product specifications without notice. Other product specifications such as color temperature, wavelength characteristics and lumen output are subject to production limitations and may vary.

LED technology is changing rapidly, and not all color temperatures and performance levels can be duplicated at a later time. Best practices include purchasing 10-15% more for a particular project on the same initial order where white LED color temperatures must be maintained over project and product life. Eventual product replacement should be considered at layout and design stages. Best practices also include testing connections and product performance prior to mounting and/or installing.

### AVERAGE LIFE

Average incandescent lamp life, rated life and average life are terms used to describe the number of hours at which half of the lamps have failed. For LEDs, the hours of rated life specify the point where 70% of original lumen output is reached. Below this point, the effective life is over, however, the LED may still emit light. Individual results may vary with actual environmental conditions including, but not limited to, proper installation, ambient temperature and/or input voltage fluctuations.