

Elakeview Enterprise LTD



LED Flood Light 200W AC277-480V 4000K

Product description: LED Flood Light 200W AC277-480V 4000K

Model Name: FL200WH4K

Order SKU: 700015HRC-4K



◇ Features

- Energy savings up to 70% vs 750W MH
- Sealed die-casting profile for outdoor applications
- High quality of heat-resisting polycarbonate optical lens
- Excellent Wind Resistance
- Preinstalled receptacle for twist-lock photocell
- Preinstalled U bracket/Trunnion mount. Mount options available:





Slipfitter:



Adjustable Horizontal Arm:

◇ Specifications

| | |
|-----------------------------|---------------------------------|
| Rated Voltage (V) | AC277-480V |
| Rated Wattage (W) | 200W |
| Frequency (Hz) | 50/60 Hz |
| Rated Input Current (mA) | 1500mA |
| Power Factor | >0.90 |
| Luminous Flux (LM) | 26,672 LM |
| Color Temperature | Cool Light 4000K |
| Color Rendering Index (Ra) | >80 |
| Beam Angle | T3 |
| Lamp Efficacy (LM/W) | 132.95 |
| Rated Lamp Lifetime (h) | 100,000 |
| Dimming | 0-10V Dimming |
| Dimension (mm) | 336*590*80 |
| IP Rating | 65 |
| Operating Temperature | -40 to 55 degC |
| Material | Aluminum + PC Lens |
| Certificate | cULus, DLC, FCC, Hg, IP65, Rohs |

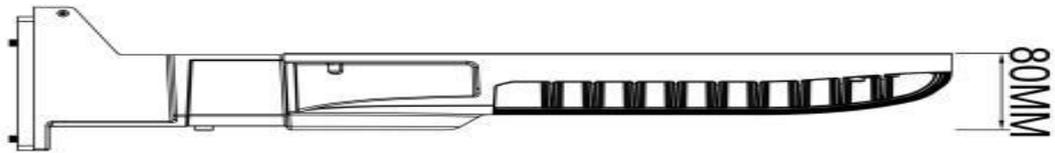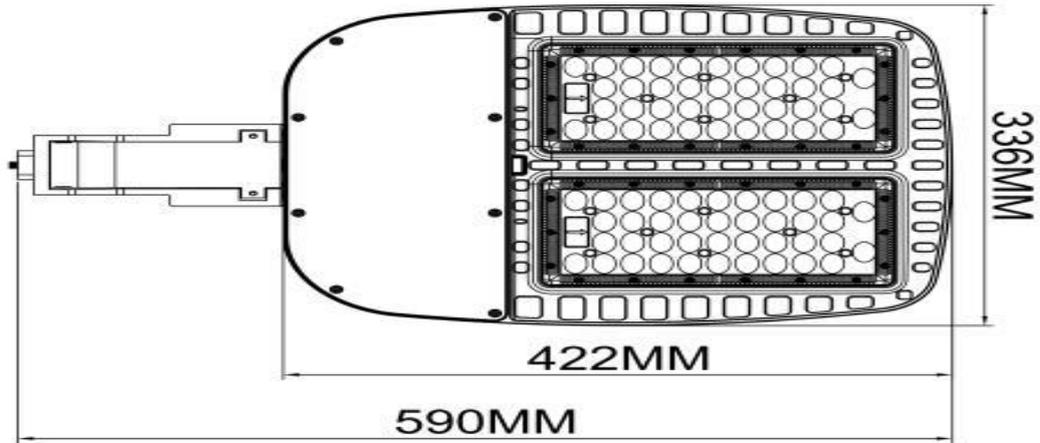

Last revised 10/29/19

www.aaoptoelectronics.com