



LED Canopy 50W AC347V 5000K



Product description: LED Canopy 50W AC347V 5000K

Model Name: AACP50W347V5K

Order SKU: 700034H


◆ Features

- Energy savings up to 70% vs 150W MH
- Sealed die-casting profile for both indoor and outdoor applications
- Three ½" threaded conduit and one ¾" conduit entry points
- High quality of heat-resisting polycarbonate optical lens
- Ultra thin, low profile design




◆ Specifications

Rated Voltage (V)	347V
Rated Wattage (W)	50W
Frequency (Hz)	50/60 Hz
Rated Input Current (mA)	0.13A Max
Power Factor	>0.86
Luminous Flux (LM)	4,149LM
Color Temperature	Day Light 5000K
Color Rendering Index (Ra)	>82
Beam Angle	160C
Lamp Efficacy (LM/W)	88LM/W
Rated Lamp Lifetime (h)	50,000
Dimming	N
Dimension (mm)	243*243*77.93
IP Rating	65
Operating Temperature	-40 to 55 degC
Material	Aluminum + PC Lens
Certificate	UL, CUL, DLC, Rohs

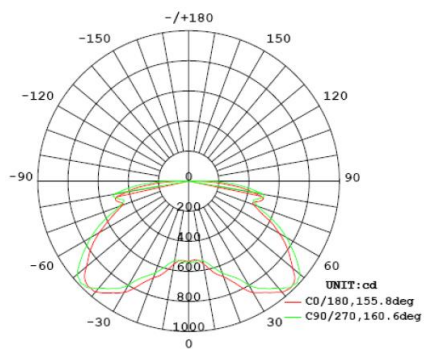

Angle: 158.30°. Flux out: 3697.0 lm.

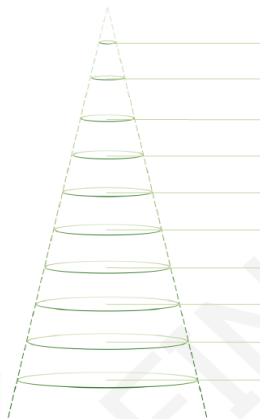

Height (m)	Diameter (cm)	E _{avg} (lx)	E _{max} (lx)
0.5	521.7	146.4	2297.0
1.0	1043.5	36.6	574.2
1.5	1565.2	16.3	255.2
2.0	2087.0	9.1	143.5
2.5	2608.7	5.9	91.9
3.0	3130.5	4.1	63.8
3.5	3652.2	3.0	46.9
4.0	4174.0	2.3	35.9
4.5	4695.7	1.8	28.4
5.0	5217.4	1.5	23.0

	C0/180	C45/225	C90/270	C135/315	AVG.
Beam Angle (50% Imax):	155.8	158.3	160.6	158.5	158.3
Field Angle (10% Imax):	176.7	179.8	180.1	179.8	179.1

