

Elakeview Enterprise LTD



LED Canopy 40W AC120-277V 5000K

Product description: LED Canopy 40W AC120-277V 5000K

Model Name: CP40WUNV50K

Order SKU: 700034N



◆ Features


- Energy savings up to 70% vs 150W MH
- Sealed die-casting profile for both indoor and outdoor applications
- Three 1/2" threaded conduit and one 3/4" conduit entry points
- High quality of heat-resisting polycarbonate optical lens
- Ultra thin, low profile design



◆ Specifications

Rated Voltage (V)	120-277V
Rated Wattage (W)	40W
Frequency (Hz)	50/60 Hz
Rated Input Current (mA)	0.37A Max
Power Factor	0.9
Luminous Flux (LM)	5,255.56 LM
Color Temperature	Day Light 5000K
Color Rendering Index (Ra)	80
Beam Angle	155C
Lamp Efficacy (LM/W)	134.28LM/W
Rated Lamp Lifetime (h)	50,000
Dimming	1-10V Dimming
Dimension (mm)	255.44*255.44*106.55
IP Rating	65
Operating Temperature	-40 to 40 degC
Material	Aluminum + PC Lens
Certificate	UL, CUL, Rohs

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

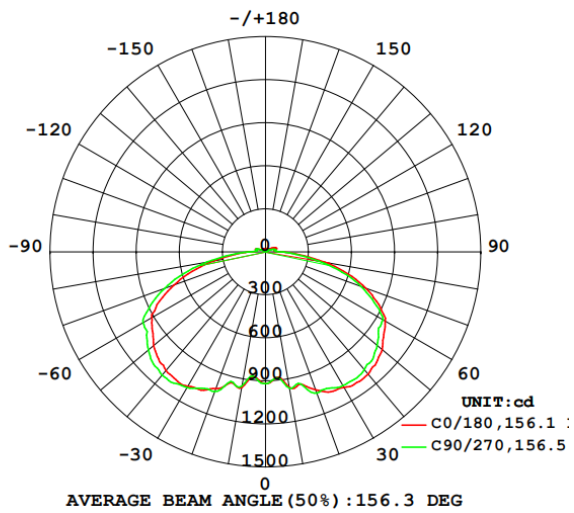

Flux out:4673 lm

Height	Eavg, Emax	Angle:156.12deg	Diameter
1m	56.20,925.51x		945.78cm
2m	14.05,231.41x		1891.56cm
3m	6.245,102.81x		2837.34cm
4m	3.513,57.841x		3783.12cm
5m	2.248,37.021x		4728.90cm
6m	1.561,25.711x		5674.68cm
7m	1.147,18.891x		6620.46cm
8m	0.8782,14.461x		7566.24cm
9m	0.6939,11.431x		8512.03cm
10m	0.5620,9.2551x		9457.81cm

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

