



# TURBO™

## Flush Mount Ceiling Fixture



Beyond LED Technology TURBO 16-inch flush mount light typically refers to a ceiling light fixture with a diameter of 16 inches that is designed to be mounted flush against the ceiling. Our Flush light mounted light comes with 3 Wattage & 5 CCT adjustable options. Our TURBO Flush mount light has a variety of styles, designs, and finishes to choose from, allowing you to select one that matches your decor and lighting needs.

### Product Features

- Up to 75 Lumens per watt
- Wattage Adjustable 16W / 22W / 30W
- 5 CCT Adjustable 2700K / 3K / 3500K / 4K / 5K
- Available in 16" with double ring
- Frosted Polycarbonate Lens
- Triac Dimmable
- Brush Nickel (Stainless Steel)
- Damp Location Suitable
- Input Voltage 120Vac
- ETL & ES Listed
- 5 Year warranty

# TURBO™

## Flush Mount Ceiling Fixture



SKU #	Model #	Wattage Adjustable	Lumens	CCT Adjustable	Size	Housing	Input Voltage	Certifications
156739	FXF23004	16W/22W/30W	2250Lm	2700K/3K/3500K/4K/5K	16"	White	120Vac	ETL & ES

### Specifications

Parameter	Description	Value
General Performance	Model #	FXF23004
	Wattage Adjustable	16W / 22W / 30W
	Lumens	2250Lm
	Lumen Efficacy	Up to 75LM/W
	Color Temperature	2700K / 3000K / 3500K / 4000K / 5000K
	CRI (Ra)	>80
	Beam Angle	110° Degree
	Diffuser Type	Frosted Polycarbonate Lens
Electrical	Input Voltage	120Vac
	Frequency	50/60Hz
	Dimming	Triac Dimmable
	Power Factor	>0.9
	Flicker Percent	30%
Physical	Operating Temperature	-20°C-40°C
	Operating Humidity	<75%RH
	Storage Temperature	20°C-30°C
	Storage Humidity	<60%RH
	LED Brand	Lumileds
	LED Type	2835
	LED QTY	84 PCS
	Housing Material	Metal
Housing Color	Brushed Nickel	
Qualification	IP Rated	DAMP
	Warranty	5 Year Limited


FLUSH MOUNT CEILING FIXTURE




# TURBO™

## Flush Mount Ceiling Fixture

### Correlated Color Temperature (CCT)

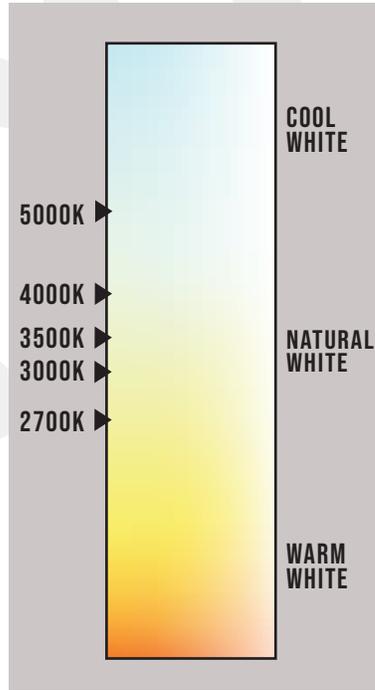

### Dimensions

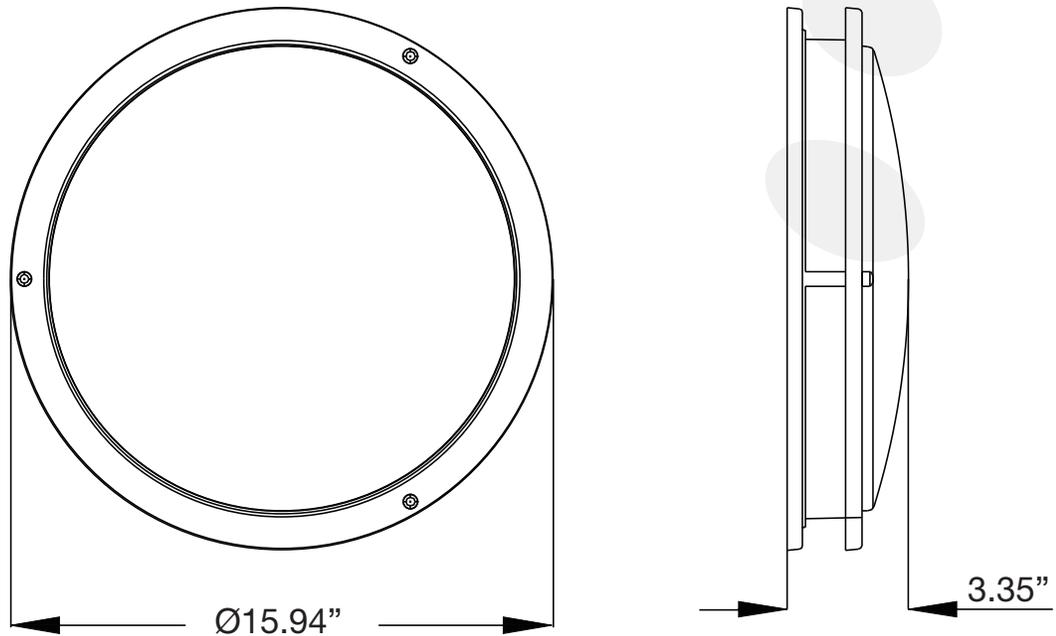


# TURBO™

## Flush Mount Ceiling Fixture



### Product Appearance

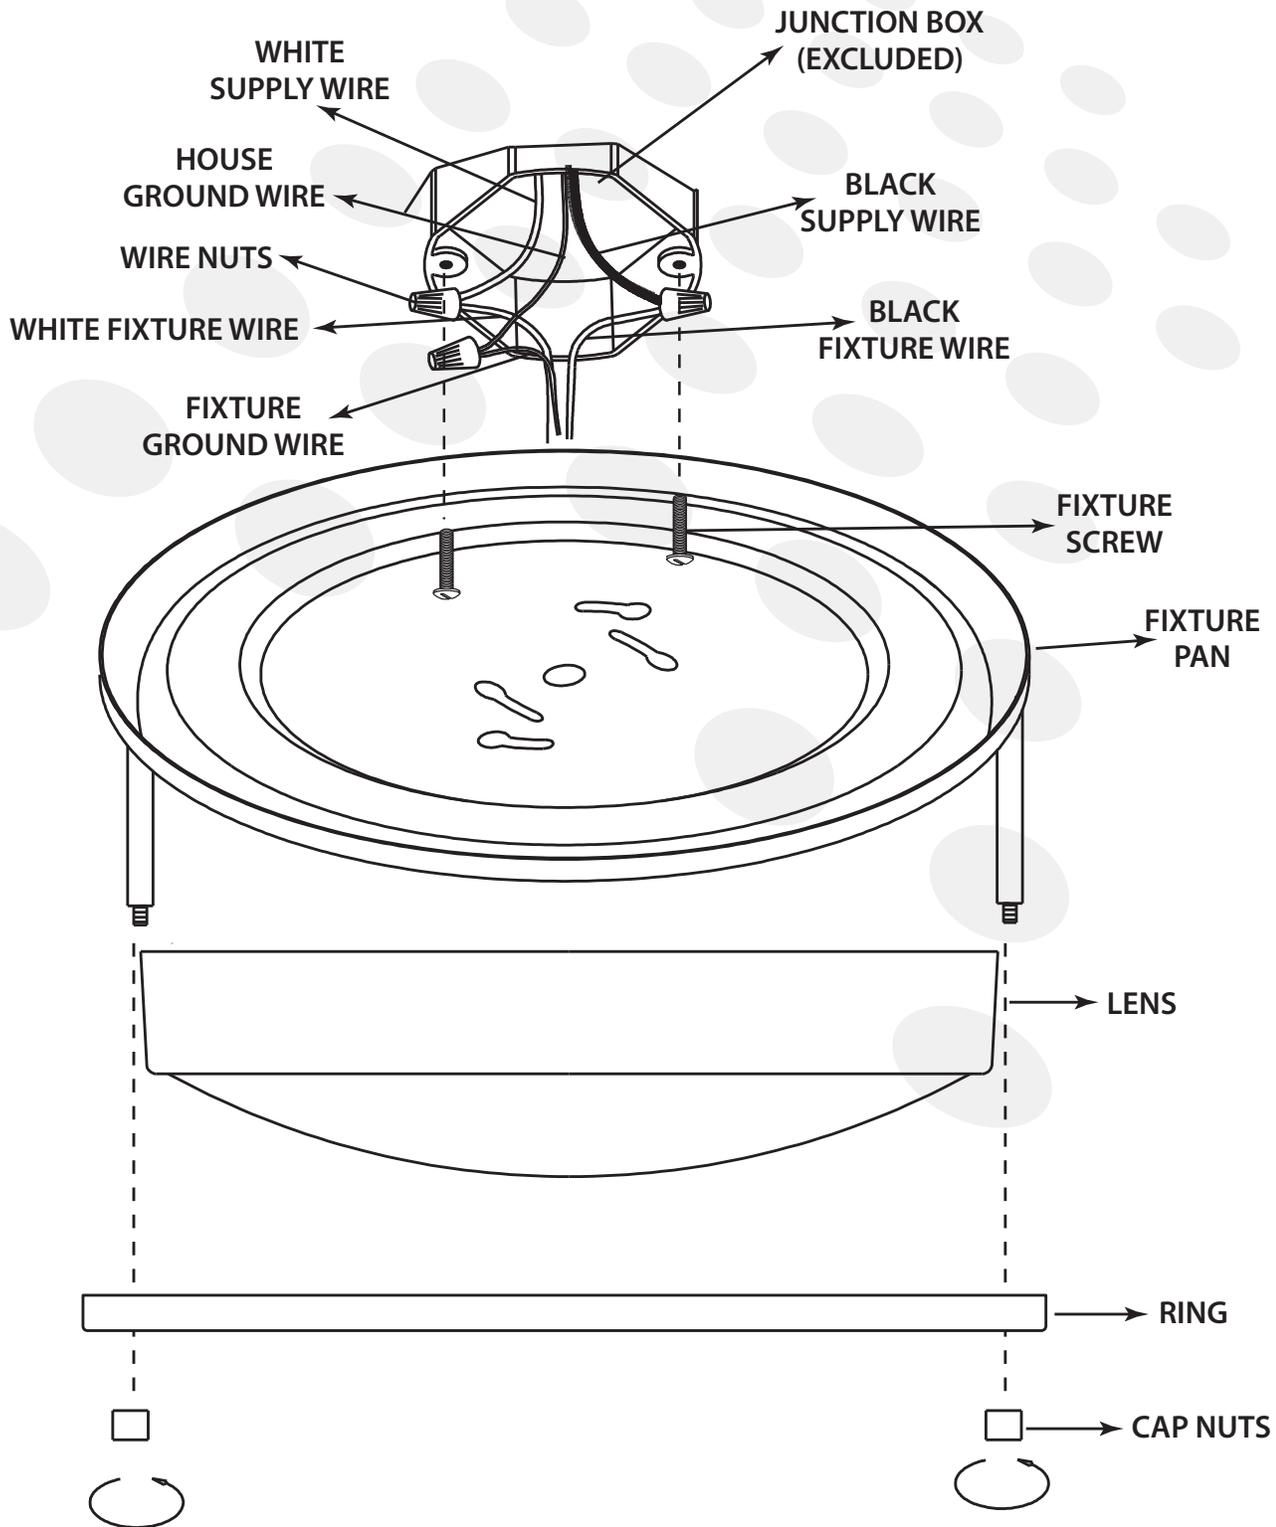


FLUSH MOUNT CEILING FIXTURE



# TURBO™

## Flush Mount Ceiling Fixture

### Photometric Data

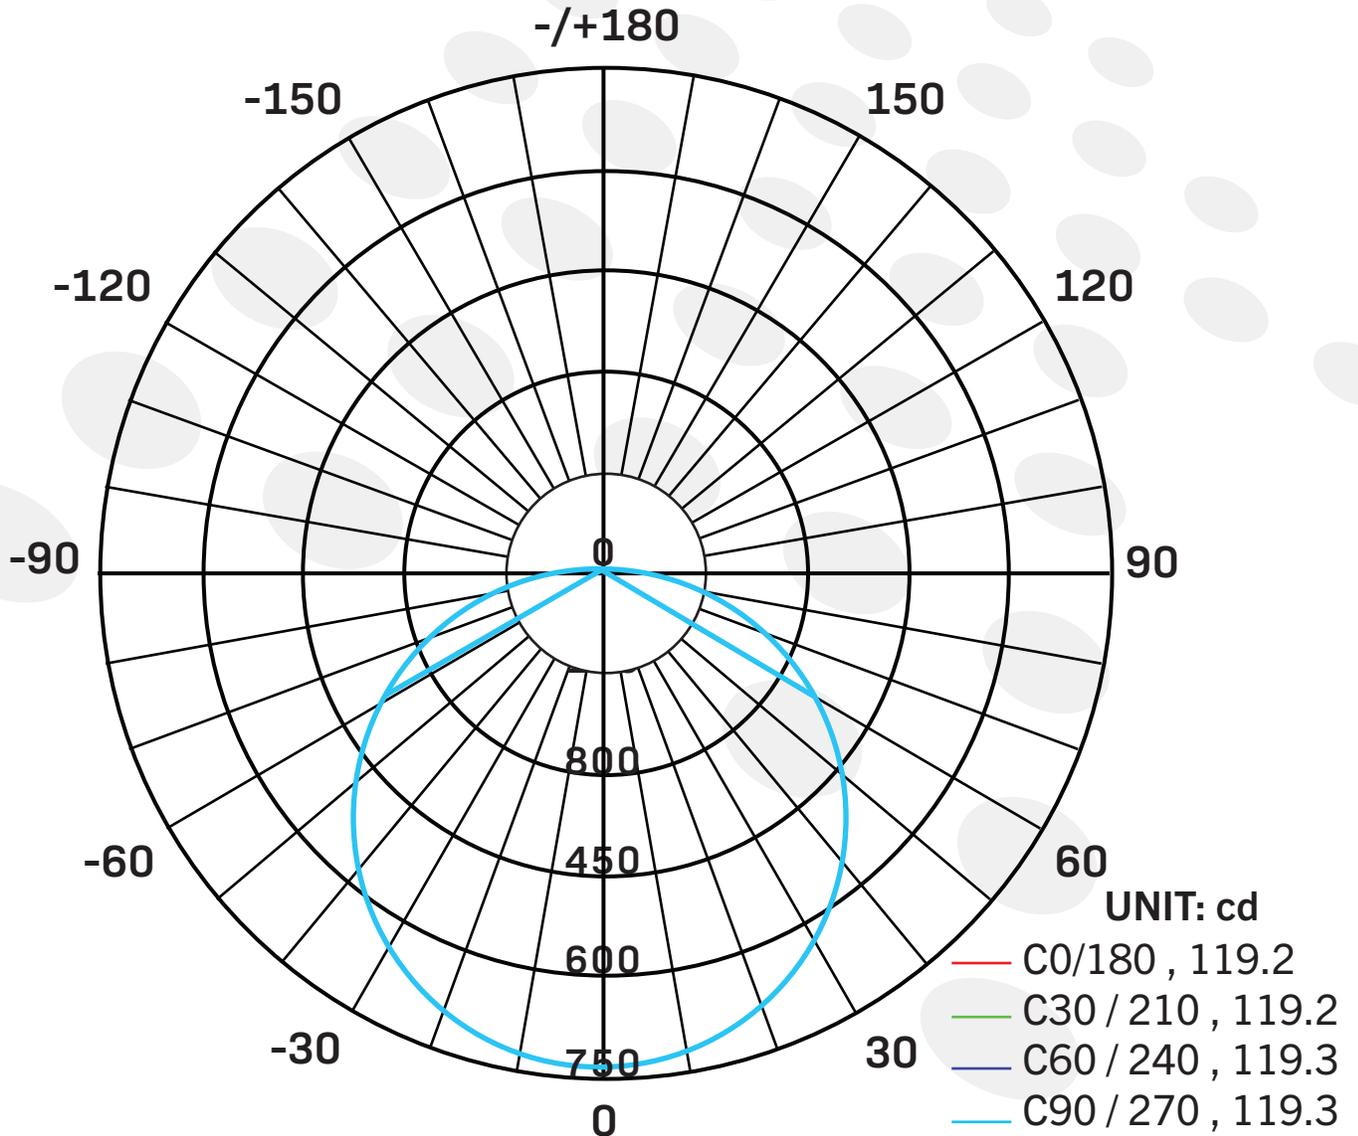

AVERAGE BEAM ANGLE (50%) : 119 . 2 DEG

# TURBO™

## Flush Mount Ceiling Fixture




### Installation




PLEASE READ AND UNDERSTAND THIS ENTIRE MANUAL BEFORE ATTEMPTING TO ASSEMBLE, OPERATE OR INSTALL THE PRODUCT.  
**WARNING:** Avoid fire or electric shock. Follow installation instructions carefully. If unsure about electrical installation, consult a qualified electrician. Wear rubber-soled shoes and work on a sturdy wooden ladder. Ground fixture to avoid potential electric shock. Handle metal parts carefully to prevent cuts. To avoid a hazard to children, account for all parts and destroy all packing materials. This product is suitable for indoor damp applications.

**CAUTION:** Turn off power at fuse or circuit breaker box before installation and maintenance. Fixture must be installed according to National Electric Code and local building codes. If you are unsure about wiring, consult a qualified electrician. THIS FIXTURE BODY IS ONE PIECE, DO NOT DISASSEMBLE OR MAKE ALTERATIONS,

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference and (2) this device must accept any interference received, including that may cause undesired operation.

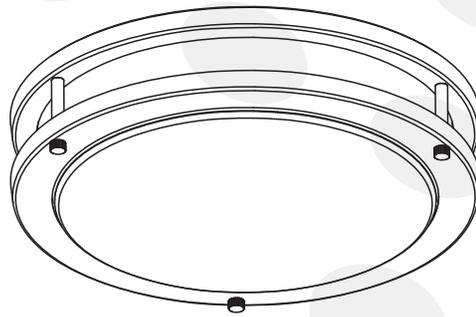

DIMMABLE\*

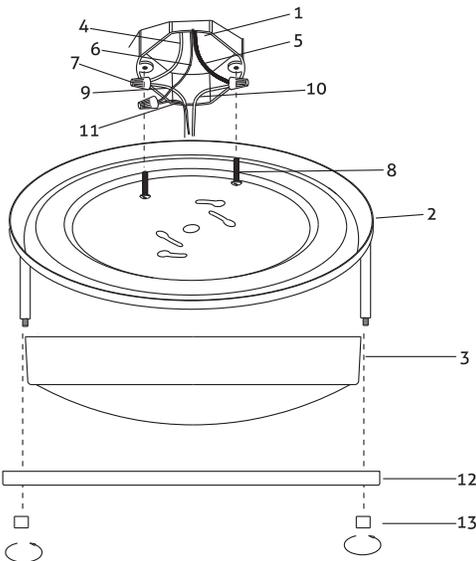

**WARNING! BEFORE PROCEEDING, PLEASE ENSURE POWER HAS BEEN SWITCHED OFF.**

1. Pull the supply wires (4, 5, 6) out of the junction box (1).
2. Thread the fixture screws (8) into the appropriate threaded holes of the junction box (1).
3. Connect the fixture black wire (10) to the black supply wire (5) white fixture wire (9) to the white supply wire (4) and fixture ground wire (11) to the supply ground wire (6) using wire nuts (7). Wrap all wire connections with electrical tape to ensure secure connection.
4. Carefully tuck all wires back into the junction box. Place the fixture pan (2) over the junction box and feed fixture screws (8) through keyhole slots. Rotate the fixture pan (2) clockwise until screws (8) lock into the narrow end of the keyhole slots and tighten screws firmly.
5. Secure the lens (3) and ring (12) to fixture pan (2) using three cap nuts (13).
6. Installation complete, restore power at the circuit breaker.

\*. Two switches are for adjusting CCT and Power.

- |                            |                         |
|----------------------------|-------------------------|
| 1. JUNCTION BOX (EXCLUDED) | 8. FIXTURE SCREW        |
| 2. FIXTURE PAN             | 9. WHITE FIXTURE WIRE   |
| 3. LENS                    | 10. BLACK FIXTURE WIRE  |
| 4. WHITE SUPPLY WIRE       | 11. FIXTURE GROUND WIRE |
| 5. BLACK SUPPLY WIRE       | 12. RING                |
| 6. HOUSE GROUND WIRE       | 13. CAP NUTS            |
| 7. WIRE NUTS               |                         |



# TURBO™

## Flush Mount Ceiling Fixture

### Box Dimensions

Box Type	Box Dimensions (Inches)	Qty.	Net Weight	Gross Weight
Inner Box	17 x 3 x 17	1 Pc/Box	3.08 LBS	3.4 LBS
Outer Box	17.71 x 16.93 x 16.93	6 Pcs/Box	18.52 LBS	23.5 LBS

### Application Images



### Warranty

5 Year Warranty