

**H6™**

Red & Green Switchable Dual Exit Sign



Make the most of your buildings Exit Signage with our variety of specialized Emergency and Exit Lights. When looking for illumination when you need it most, LED exit signs offer the brightness you need in emergency situations and in case of a fire, exit signs can save lives. Beyond LED provides signs to completely with building fire codes and insurance standards.

Product Features

- Wattage 2 x 2W
- CCT 5000K
- Diffuse type Red & Green
- Input Volt: 120-277V / 50-60Hz
- Low energy consumption (2W)
- Output Power: 24H
- Charging Time 24 hrs
- Discharging Time: 90 minutes
- Snap-fit faceplate design
- Ceiling mount and Wall mount
- Red & Green Switchable Dual Exit Sign
- Universal single face and double face
- Maintenance-free nickel-metal hydride battery
- Two adjustable, glare-free LED round lighting heads
- UL Listed
- 2 Year Warranty

H6™

Red & Green Switchable Dual Exit Sign



LED EMERGENCY LIGHT

SKU: 156791

Specifications


Parameter	Description	Value
General Performance	Wattage	2 x 2W
	Color Temperature (With two side lamp)	5000K
	CRI (With two side lamp)	>80
	Lumen (With two side lamp)	≥135Lm
	Input Voltage	120-277VAC
	Frequency	50/60Hz
	Battery Type	NI-MH battery
	Battery Capacity	3.6V,1000mAH
	Charging Time	≤24 Hours
	Emergency Discharging Time	≥90 minutes
	Pilot lamp status	ON: Charging OFF: Charged and working normally Flicker: Lamp malfunction
Physical	Operating Temperature	0°C TO 50°C
	Operating Humidity	10%-90% RH
	Storage Temperature	-20°C TO 80°C
	Storage Humidity	10%-95% RH
	LED Brand	Lumileds
	LED Type	2835 (1.0W)
	LED QTY	2 PCS
	IP Rating DRY	IP20
Other	Housing	PC+ABS
	Housing color	White
	Warranty Time	2 Year Warranty




H6™

Red & Green Switchable Dual Exit Sign

Correlated Color Temperature (CCT)

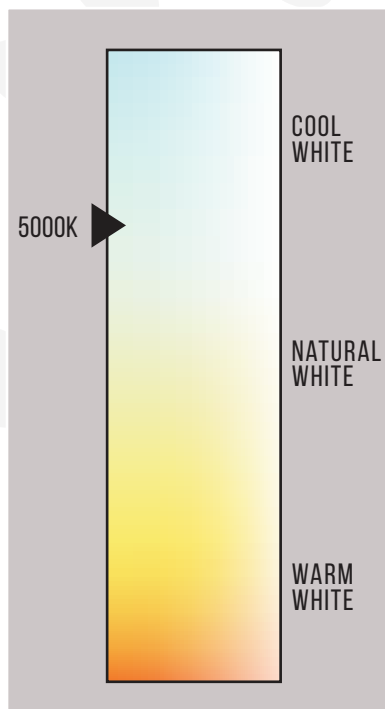

Dimensions

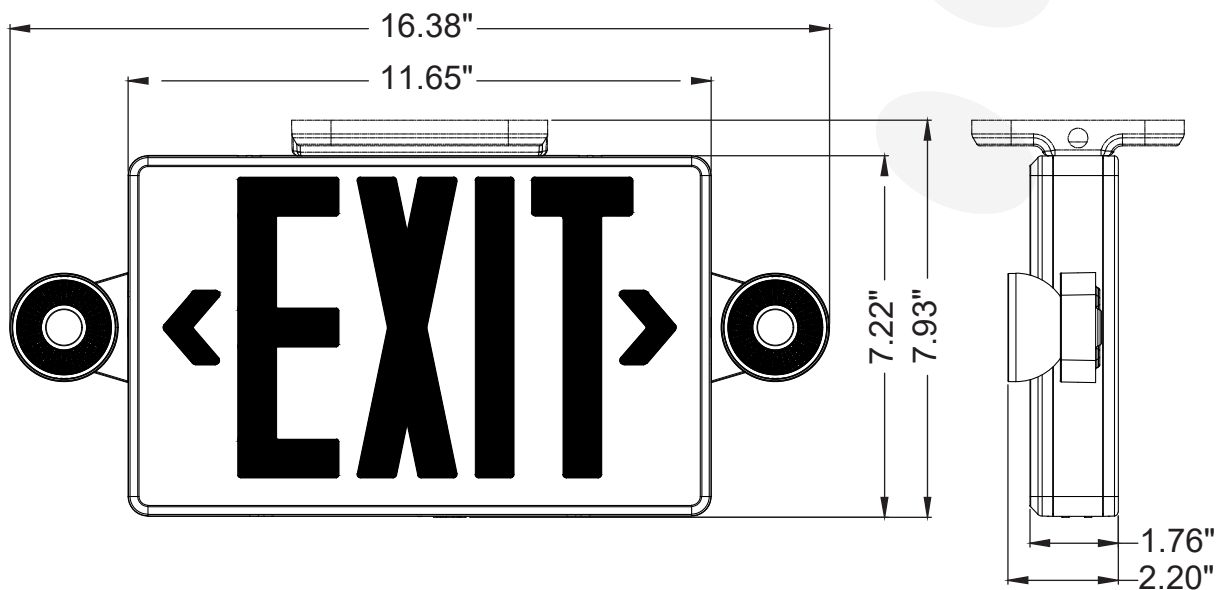



H6™

Red & Green Switchable Dual Exit Sign

Installation

When using electrical equipment, always adhere to basic safety precautions including the following:

IMPORTANT

- The battery in this unit may not be fully charged. After electricity is connected to unit, let battery charge for at least 24 hours, then normal operation of this unit should take effect.
- The equipment (battery) should be charged for 24 hours. When the equipment has been stored for more than 6 months without installation or use,
- To check, press TEST button. The emergency LED lamps should illuminate.
- When re-lamping, use only LED lamps specified in the fixture. Using other lamp types may result in transformer damage or unsafe conditions.

READ AND FOLLOW ALL SAFETY INSTRUCTIONS

1. Do not use outdoors.
2. Equipment should be mounted securely in locations and at heights where it will not be readily subjected to tampering by unauthorized personnel.
3. Do not mount near gas or electric heaters.
4. Cap unused wires with enclosed wire nuts or other approved method.
5. Do not use this equipment for anything other than its intended use.
6. The use of accessory equipment not recommended by the manufacturer will void product listing and warranty and may cause an unsafe condition.
7. Disconnect AC power before servicing and installation.
8. Consult local building code for approved wiring and installation.
9. Use caution when servicing batteries.
10. Any service on this equipment should be performed by qualified personnel only.
11. Make sure wire terminations are secure and leads are properly tucked in appropriate wire channels.
12. If acid is spilled on skin or eyes, flush acid with fresh water and contact a physician immediately
13. Models "AST-EMEX01-2WA1-abSde" shall be marked "Max mounting height: 19.6ft (6m)"

INSTALLATION (CEILING MOUNT)

1. Remove faceplate and set aside.
2. Connect 20-inch jumper leads slide through the canopy to AC input leads in J-box. Use red wire for 120-277V. White wire is common.
3. Fasten canopy to ceiling.
4. Remove canopy hole cover on the top and snap housing to canopy.
5. Connect and trim input leads and slide through the canopy and connect to supply leads in the J-box
6. Connect battery only after continuous. AC power can be provided to the unit.
7. Remove proper chevron(s) as required.
8. Secure face plate(s) to housing.

**H6™**

Red & Green Switchable Dual Exit Sign

Installation

OPERATION

1. Apply AC power to the unit. The LED indicator should turn RED.
2. After the battery has been left to charge for 24 hours, test the unit by pushing the switch. The LED indicator turns OFF and the LED board stays ON.
3. When the switch is released, the LEDs turn OFF and LED indicator turns back to RED.

MAINTENANCE


Caution: Always turn off AC power to the equipment before servicing. Servicing should be performed only by qualified service technician. Use only MANUFACTURE supplied replacement parts.

BATTERY

The battery with the Battery Backup model requires no maintenance. However, it should be periodically (see TESTING) and replaced when it no longer operates the connected fixtures for the duration of a 30-second or 90 minutes test. The battery supplied in this equipment has a life expectancy of 5 years when used in a normal temperature of 72F.

TESTING

National Electric Code (NEC) and NFPA life safety code regulations require that routine tests need to be performed as listed below: Once every month, the unit needs to be tested for duration 30 seconds. Push in and hold the test switch to perform this test. Once every 12 months, a full 90 minutes (per UL requirements) test needs to be performed on the unit. Disconnect power to the unit and leave it in the emergency mode. The LEDs should stay ON for at least 90 minutes.

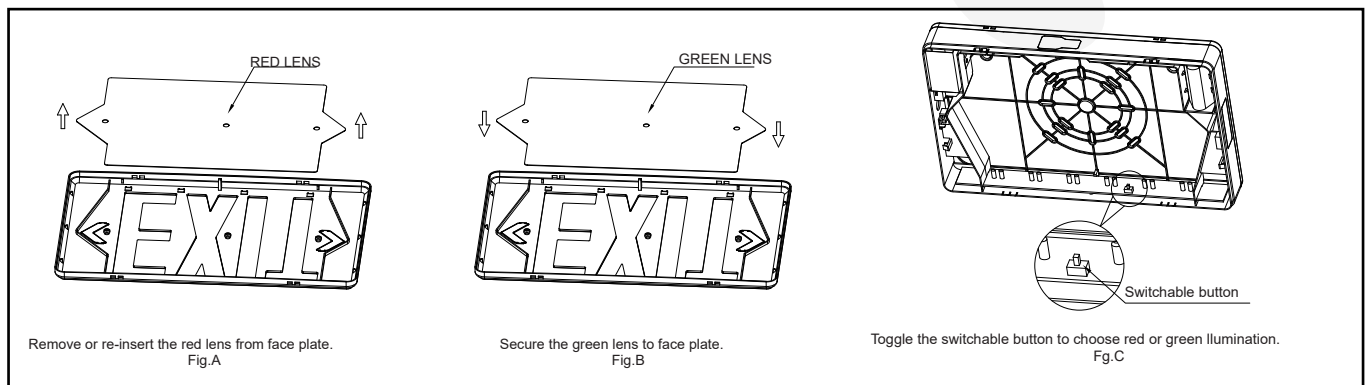



Notice For User

- Please turn off power before install or change assembly parts.
- The input voltage and luminaires should be matched, after connecting the power line, Please make sure the wiring section is insulated.
- No-professionals, must not install and disassemble the luminaires.
- Do not use the fixture when the environment temperature is above 50°C or below 0°C, or it will cause rapid attenuation of the battery and affect the battery's lifetime, even damage it.
- Do not use non-standard installation accessories to install the fixture, any accident caused will be born by the operator.
- The lamp is stored for 6 months without use. Please charge the lamp for 24 hours, otherwise it will seriously affect the battery life.

Trouble Shootings

Trouble	Check Points
Flickering of indicator light	Turn off the power and check battery connections. If same phenomena occur, then call agencies.
Out of working	Please check the connection.

PACKAGE

Box Type	Carton (Inch)	Qty / Carton	Net Weight / Carton	Gross Weight / Carton
Outer Box	28.1 x 17.1 x 15.8	20 Pcs/Box	2.15 LBS	51.39 LBS



H6™

Red & Green Switchable Dual Exit Sign

Application Picture



H6™

Red & Green Switchable Dual Exit Sign



Application Picture



LED EMERGENCY LIGHT

Warranty

2 Years Warranty