

Important Safeguards:

When using electrical equipment, basic safety precautions should always be followed including the following:

Read and follow all safety instructions

1. **Danger** - Risk of shock - Disconnect power before installation
2. **Product must be installed in accordance with CEC or your local electrical code.** If you are not familiar with these codes and requirements, consult a qualified electrician.

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE



Notes:


- Available luminaire lengths are 2', and 4'.

BJ Take Accessories (ordered separately):

- Motion Sensor

Installation Instructions:

Figure 1.

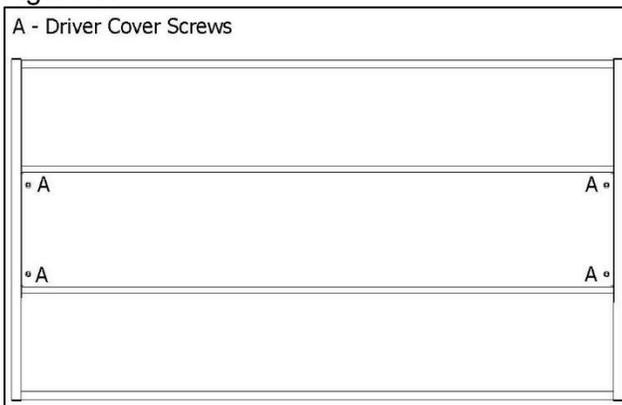

Luminaire Installation:

Step 1:


Remove the ballast cover from the center of the fixture by removing the four screws. (See Figure 1)

Step 2: **Mounting & Wiring**

Suspend the fixture using the four holes provided on the hanger mount. **(Note this fixture must be suspended a minimum of 18" from the ceiling.)** Wire the fixture using the access panel's knock-outs. (See Figure 2)

Note: For wiring instructions please see **Electrical Connections** on page 2.

Figure 2.

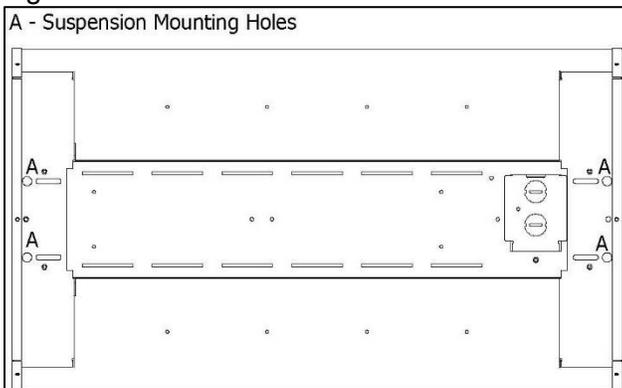

Step 3:

Reattach the Ballast cover.

Electrical Connections:


Make the following Electrical Connections:

For 120-277V / 347V Applications make the following Electrical Connections:

- a. Connect the black luminaire lead to the line supply lead
- b. Connect the white luminaire lead to the neutral supply lead
- c. Connect the green or green and yellow ground lead to the supply ground lead

Dimming Option:

- a. Connect the violet dimming positive lead to the supply dimming positive lead
- b. Connect the grey dimming negative lead to the supply dimming negative lead

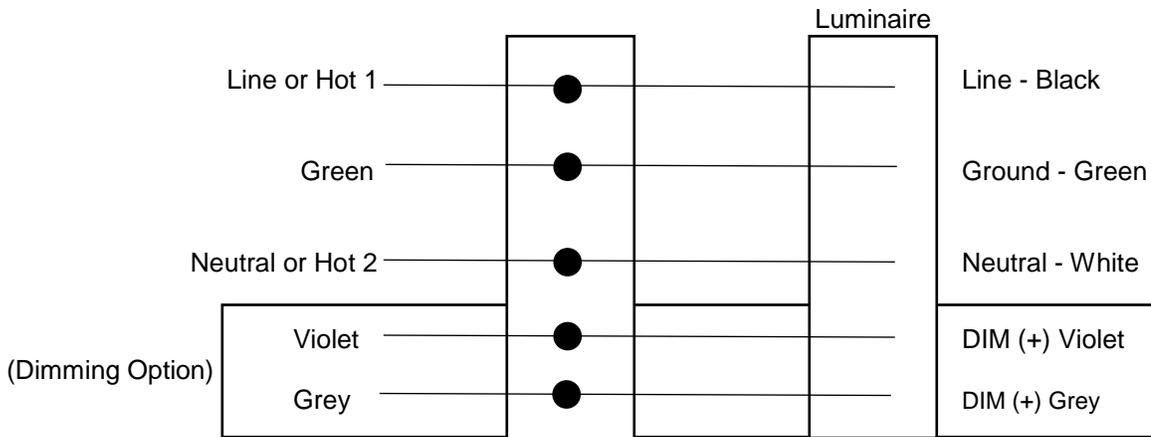

For 16/4 both circuits must be connected to the same branch circuit, i.e. turning off the branch circuit protection will turn off both circuits of the luminaire.

Electrical Disconnect Instructions:

The above electrical connections for the line 1 and neutral are made using the electrical disconnect that is connected to the LED driver. The connections are made as follows below, note that the disconnect is color coded for circuit wiring.

- a. Black to Live
- b. White to Neutral

The intended wire sizes are as follows, with an 11-13 mm jacking length.

- a. 2 x AWG 18-12 **solid wire** per pole
- b. 2 x AWG 16-12 \leq 19 **stranded wire** per pole

If a wire is connected incorrectly the only way to remove the wire is by twisting the electrical disconnect and pulling firmly on the incorrect wire.

Pendant Mount Install:

Figure 1.


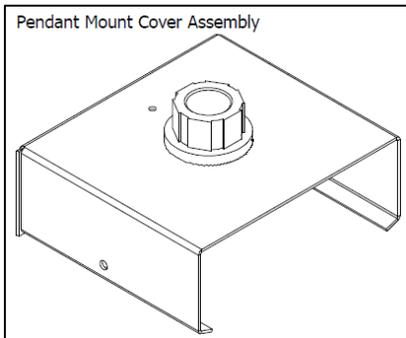


Figure 2.

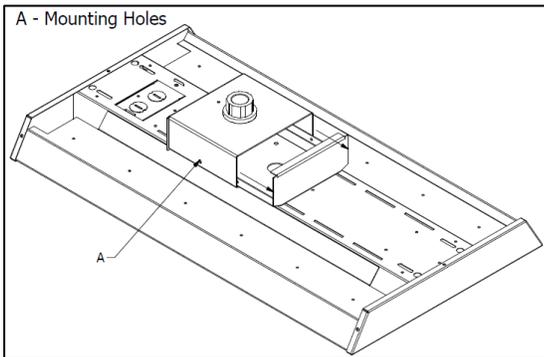

Luminaire Installation:

Step 1:

Slide the pendant mount cover assembly (**See Figure 1**) off the back of the fixture by removing the three mounting screws. (**See Figure 2**)

Step 2:

Install the pendant mount cover assembly on to the $\frac{3}{4}$ " threaded pendant rod. (Rod supplied by other)

Step 3:

Bring wiring down from the pendant mount rod and make electrical connection.

Note: For wiring instructions please see **Electrical Connections** on page 2.

Step 4:

Slide the pendant mount cover assembly on to the pendant mount base plate and secure by reinstalling the three previously removed screws in the mounting holes (A). (**See Figure 2**)