

LED UNDERCABINET TASK LIGHT BAR

LED9-C
LED17-C
LED31-C

12/16

QUESTIONS OR CONCERNS CONTACT AT:

1-800-265-1833 (English) / 1-800-567-2513 (French) Monday through Friday 8:00 AM to 5:00 PM E.S.T.




INSTRUCTIONS PERTAINING TO RISK OF FIRE OR INJURY TO PERSONS
READ ALL INSTRUCTIONS

IMPORTANT SAFETY INSTRUCTIONS

SAVE THESE INSTRUCTIONS


TOOLS AND MATERIALS REQUIRED:



Wiring supplies as required by local electrical code


PACKAGE CONTENTS

| PART | DESCRIPTION | QTY |
|------|--|-----|
| A | LED LIGHT FIXTURE | 1 |
| B | MOUNTING CLIP FOR SCREW MOUNT | 2 |
| C | MOUNTING CLIP FOR MAGNETIC MOUNT (LED9-C, LED17-C) | 2 |
| | MOUNTING CLIP FOR MAGNETIC MOUNT (LED31-C) | 3 |
| D | WOOD SCREW | 2 |
| E | 8" CONNECTING CORD | 1 |
| F | PUSH-IN CONNECTOR | 1 |
| G | WIRE CLIP | 3 |

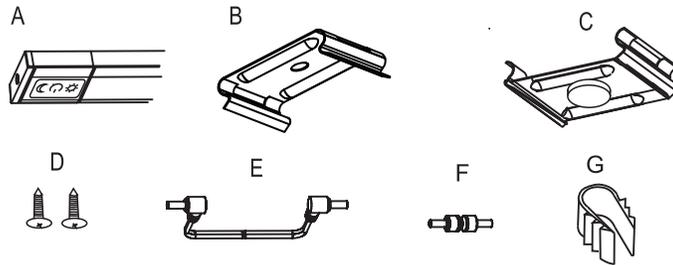


MADE IN CHINA

SCREW MOUNT




1. Plan your install. Pre-drill holes undercabinet. Install the mounting clips with the provided wood screws into predrilled holes. Make sure mounting clips are facing the same direction. Mounting clip optimum location is 1" from each end of light fixture (3/32" diameter x 1/4" deep predrilled holes)




2. Raise the light fixture so the channel on the back aligns with the mounting clips.

MAGNETIC MOUNT

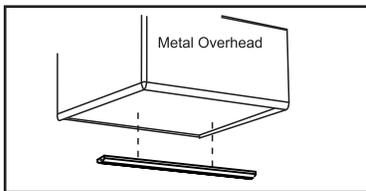

1. Attach magnetic mounting clips to the light fixture. Optimum clips location is 1" from each end of light fixture.

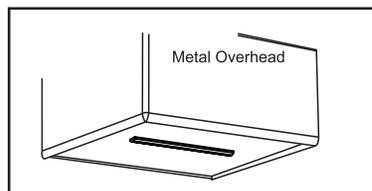

2. Attach the light fixture to desired position on metal shelf.

POWER SUPPLY SOLD SEPARATELY
See PAGE 2 for possible configurations to determine the Driver required for installation.

Driver includes 6' cord with plug

**OPTION #1
CORD & PLUG**

REQUIRES DRIVER
(sold separately)

20W - (FY2401000-C)
Supports up to 20Watts

60W - (FY2402500-C)
Supports up to 60Watts

Driver includes 1' hardwire cord

**OPTION #2
HARDWARE**

REQUIRES HARDWIRE KIT
(sold separately)

(UC-XN33WH/JBN-C)

REQUIRES DRIVER
(sold separately)

20W - (FY2401000-C)
Supports up to 20Watts

60W - (FY2402500-C)
Supports up to 60Watts


Caution: Excessive force in the overhead may cause light to dislodge.

MADE IN CHINA


POSSIBLE CONFIGURATIONS

To determine the Driver required for your installation you must calculate the wattage of the light bars required for your installation.


20W DRIVER (sold separately)
 (FY2401000-C)
 Supports up to 20Watts

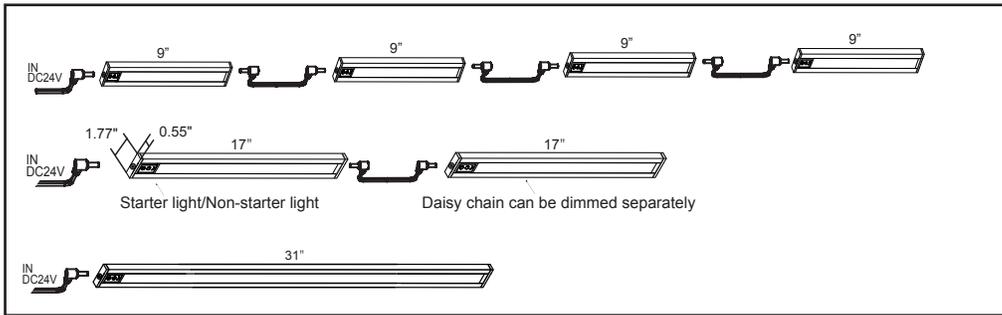


Driver includes
 1' hardwire cord and 6' cord with plug

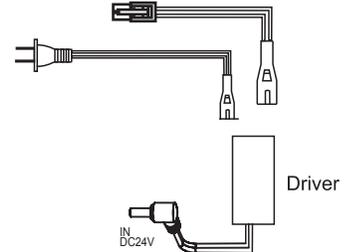

60W DRIVER (sold separately)
 (FY2402500-C)
 Supports up to 60Watts

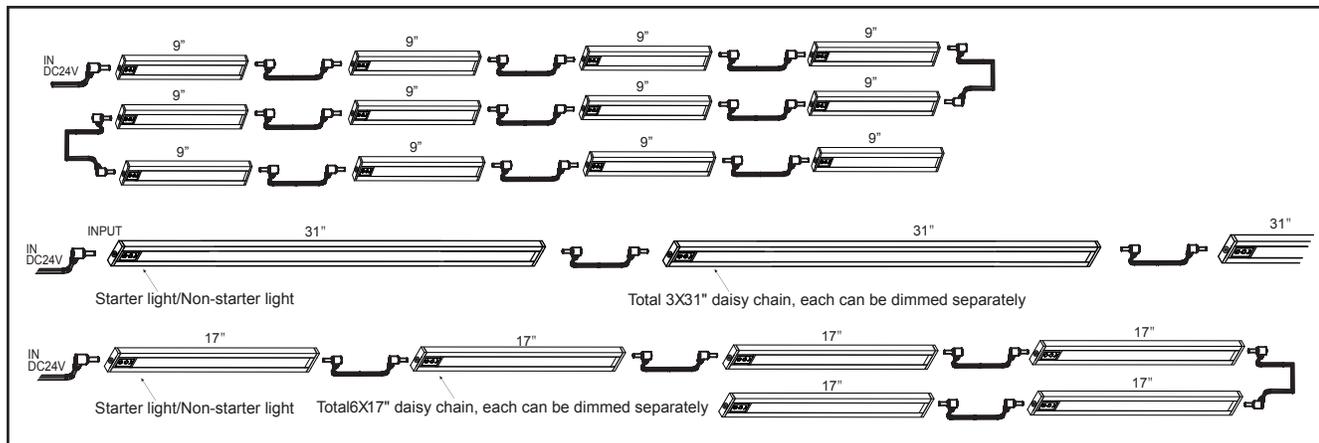

OPERATION




Slightly tap the white cap with icons to turn on or off
 Touch and hold icons to operate dimmer function.
 Fixture will automatically turn off after 8 hours of use.


When fixtures are linked together the "starter light" can control the following lights. On, off or dim. The following lights can also be dimmed separately by touching the icons on each fixture.

OPTIONAL ACCESSORIES (sold separately)

Motion Sensor (LED-M-C)



54" INTERLINK Cord (LED-LK54-C)

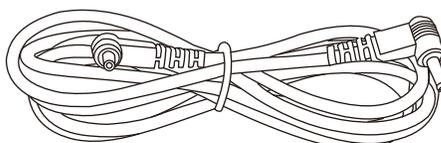

MADE IN CHINA