

Warnings:

THIS DEVICE IS NOT INTENDED FOR USE WITH EMERGENCY EXITS.

WARNING-RISK OF FIRE OR ELECTRIC SHOCK. LED RETROFIT KIT INSTALLATION REQUIRES KNOWLEDGE OF LUMINAIRE ELECTRICAL SYSTEMS. IF NOT QUALIFIED, DO NOT ATTEMPT INSTALLATION. CONTACT A QUALIFIED ELECTRICIAN.

WARNING-RISK OF FIRE OR ELECTRIC SHOCK. INSTALL THIS KIT ONLY IN LUMINAIRE THAT HAVE THE CONSTRUCTION FEATURES AND DIMENSIONS SHOWN IN THE PHOTOGRAPHS AND/OR DRAWINGS AND WHERE THE INPUT RATING OF THE RETROFIT KIT DOES NOT EXCEED THE INPUT RATING OF THE LUMINAIRE. DO NOT MAKE OR ALTER ANY OPEN HOLES IN AN ENCLOSURE OF WIRING OR ELECTRICAL COMPONENTS DURING KIT INSTALLATION.

WARNING-TO PREVENT WIRING DAMAGE OR ABRASION, DO NOT EXPOSE WIRING TO EDGES OF SHEET METAL OR OTHER SHARP OBJECTS. INSTALLERS SHOULD NOT DISCONNECT EXISTING WIRES FROM LAMP HOLDER TERMINALS TO MAKE CONNECTIONS. INSTALLERS SHOULD CUT EXISTING LEADS AWAY FROM THE LAMPHOLDER AND MAKE ELECTRICAL CONNECTIONS TO LEAD WIRES BY EMPLOYING APPLICABLE CONNECTORS.

WARNING-DO NOT CONNECT TO EXISTING BALLAST. BALLAST MUST BE BYPASSED OR REMOVED. LAMP SHOULD ONLY BE CONNECTED DIRECTLY TO 120V - 277V POWER SOURCE VIA EXISTING LAMPHOLDER.

WARNING-RISK OF FIRE OR ELECTRIC SHOCK. INSTALL THIS KIT ONLY IN THE LUMINAIRE THAT HAVE THE CONSTRUCTION FEATURES AND DIMENSIONS SHOWN IN THE PHOTOGRAPHS AND/OR DRAWINGS AND WHERE THE INPUT RATING OF THE RETROFIT KIT DOES NOT EXCEED THE INPUT RATING OF THE LUMINAIRE.

THIS RETROFIT KIT IS ACCEPTED AS A COMPONENT OF A LUMINAIRE WHERE THE SUITABILITY OF THE COMBINATION SHALL BE DETERMINED BY AUTHORITIES HAVING JURISDICTION.



Do not connect to a generator.

Avoid using the fixture in environment where there is smoke, sulfur, and/or corrosive substances. But if used in such an environment, make sure the fixture is well protected by an enclosed lampshade with a dimension no less than below size, and whose material is either glass, semi-glass, or semi-metallic. The surface of the lampshade shall not have any covering which prevents heat dissipation.

Power (W)	27	36	45	54	75	95	115
Volume (CM)	34*20*20	38*20*20	40*20*20	42*21*21	42*23*23	44*24*24	44*26*26


CSC LED Paddle Lamp Instructions

Product features:

- ◆ LUMILED chip
- ◆ 90*150 degree, TYPE III; 150 degree, TYPE V
- ◆ Lamp Base: 270 degree rotational
- ◆ Internal driver, input voltage AC100-277V
- ◆ New style and high efficient wide-range input
- ◆ Long lifespan and good heat dissipation
- ◆ Replaces Metal Halide and HPS, easy Installation
- ◆ Fits many different fixtures to replace traditional lamps

Application:


LED Retrofit Kit makes it simple to replace: parking lot lighting, shoebox lighting, street lighting, flood lighting, wall pack lighting, and canopy lighting etc.

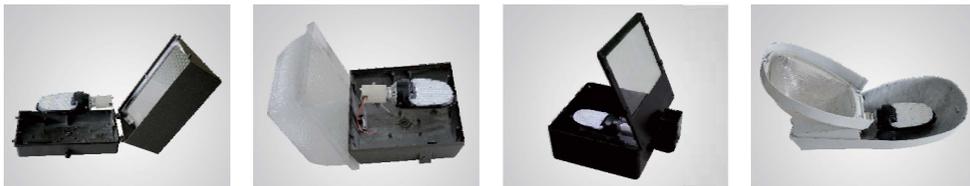


Installation Instructions:

Warning: Please make sure the power is off before installation.


1. Turn off the power switch.
2. Remove the existing CFL, MH, HPS lamp.
3. Thread LED lamp into lamp holder. Rotate the lamp as required. Ensure the emitting surface is flush with the cover of enclosure. See Figure (1)(3)(4). (Important: Remove or bypass the ballast before installing LED lamp) This LED lamp must be connected directly to 120V-277V power source only.
4. If security string provided, fix one branch of the string on the lamp body, the other on the enclosure. See Figure (2).
5. Turn on the power switch.

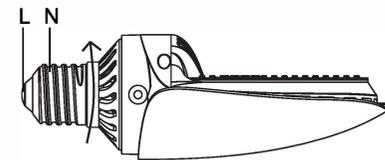


Figure(1)

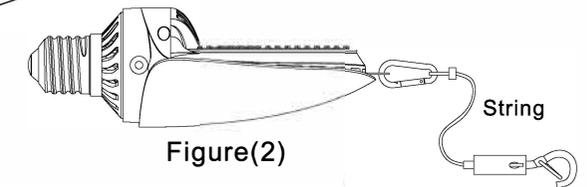

Figure(2)

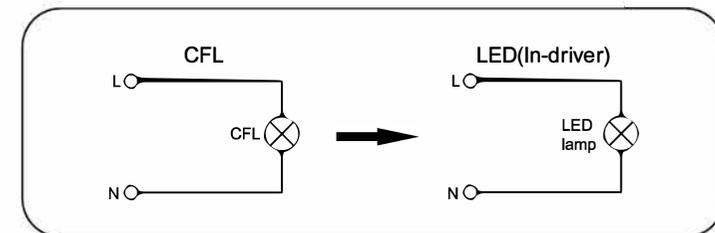

Figure(3)

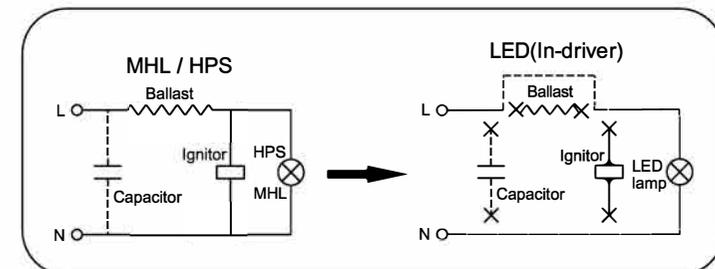

Figure(4)