

LED VAPOR PROOF HIGH BAY



MODEL: VP8FTUCCTW2

SKU: 900015UCCTW8FT2A

LED VAPOR PROOF 8FT

ELAKEVIEW ENTERPRISE LTD.

PRODUCT DESCRIPTION

The Elakeview LED Vapor Proof is designed for environments Works perfectly for all commercial and industrial applications where weather and/or dust resistant lighting application is required.



HIGHLIGHTS

- AC120-347V
- Class2 0-10V Dimming Driver, 4/6KV surge protector, w/overtemperature protection
- Wattage Selectable: 65/75/90W
- Color Temperature Selectable: 3500/4000/5000K
- Efficacy: 142LM/W
- Receptacle for Microwave Dimming Sensor (Sensor Sold Separately)
- Suitable for Damp Location
- Easy to Install and Operate
- Over 50,000 Hours Life Time
- DLC 5.1, cUL, NSF, NEMA 4X Listed
- Standard 5 Years Warranty



APPLICATIONS

Suitable to storage areas, farms, underground parking, food industry, painting industry, etc.

ORDERING INFORMATION

Order SKU	DLC MODEL #	DLC	CRI	INPUT VOLTAGE	POWER	EFFICACY	DELIVERED LUMENS	CCT	FINISH	SIZE
900015UCCTW8FT2A	VP8FTUCCTW2	S-Z5X2RG	>80	AC120-347V	65/75/90W	140LM/W	9100/10500/12870LM	3500/4000/5000K	WHITE	8FT
900015UCCTW2FT	VP2FTUCCTW	S-ECM09R	>80	AC120-347V	15/20/25W	156LM/W	2340/3250/3900LM	3500/4000/5000K	WHITE	2FT
900015UCCTW4FTA	VP4FTUCCTW	S-7KML5V	>80	AC120-347V	34/38/45W	130LM/W	4420/4940/5850LM	3500/4000/5000K	WHITE	4FT
900015UCCTW8FTA	VP8FTUCCTW	S-680N2L	>80	AC120-347V	65/75/90W	130LM/W	8450/9750/11700LM	3500/4000/5000K	WHITE	8FT
900015UCCTW4FT2A	VP4FTUCCTW2	S-6R88V0	>80	AC120-347V	26/35/45W	140LM/W	3640/4900/6390LM	3500/4000/5000K	WHITE	4FT

REV 1

LED VAPOR PROOF HIGH BAY



MODEL: VP8FTUCCTW2

SKU: 900015UCCTW8FT2A

LED VAPOR PROOF 8FT

ELAKEVIEW ENTERPRISE LTD.


PRODUCT FEATURES

- AC120-347V
- Class2 0-10V Dimming Driver, 4/6KV surge protector, w/overtemperature protection
- Wattage Selectable: 65/75/90W
- Color Temperature Selectable: 3500/4000/5000K
- Efficacy: 142LM/W
- One-piece polycarbonate housing
- Frosted polycarbonate lens
- Surface and suspended mounting clamp inside
- Receptacle for Microwave Dimming Sensor (Sensor Sold Separately)
- Suitable for Damp Location
- Easy to Install and Operate
- Over 50,000 Hours Life Time
- DLC 5.1, cUL, NSF, NEMA 4X Listed
- Standard 5 Years Warranty

PRODUCT SPECIFICATIONS

WATTS	EFFICACY	LUMENS	COLOR TEMP	BEAM ANGLE	CRI	VOLTAGE	POWER FREQ	POWER FACTOR
65/75/90 W	142LM/W	9100/10500/12870 LM	3500/4000/5000K	110°	>80	AC120-347V	60HZ	>.99

DIMENSIONS

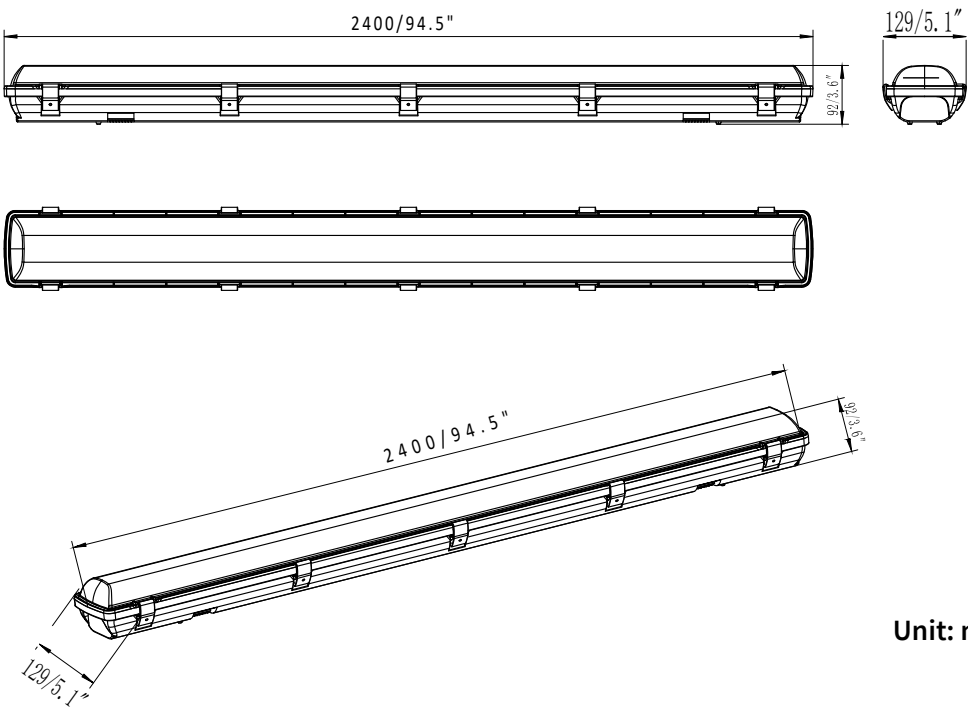

Unit: mm/inch

REV 1

LED VAPOR PROOF HIGH BAY



MODEL:VP8FTUCCTW2

SKU: 900015UCCTW4FT2A


LED VAPOR PROOF 8FT

ELAKEVIEW ENTERPRISE LTD.

PHOTOMETRIC INFORMATION

Lamp Output: 1 lamp, rated Lumens/lamp: 6355.9
 Input Wattage: 44.71
 Luminous Opening: Rectangle w/Luminous Sides
 (L: 48.82", W: 4.13", H: 1.18")
 Max Cd: 2,107.8 at Horizontal: 45°, Vertical: 1°
 CUTOFF CLASS: Semicutoff
 Roadway Class: VERY SHORT, TYPE II
 Efficiency: 100%

COLOR RENDITION REPORT

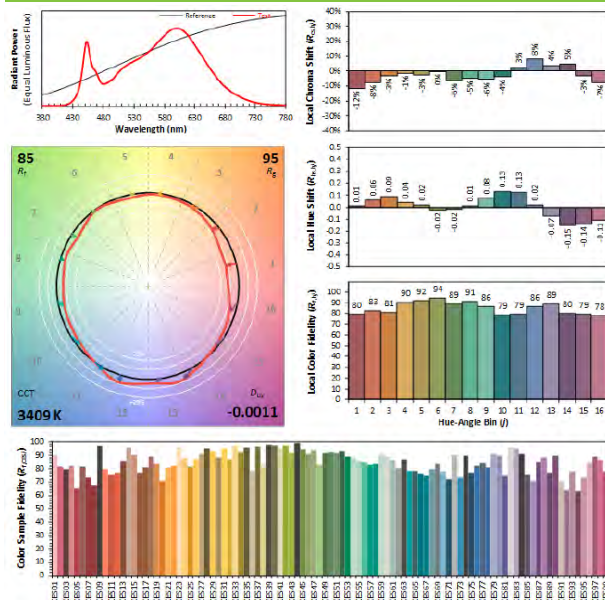


Notes: This is a recommended method for displaying ANSI/IES TM-30-18 information.


x 0.4093
 y 0.3903
 u' 0.2385
 v' 0.6117
 CIE 13.3-1995 (CRI)
 R_a 84
 R_g 11

Colors are for visual orientation purposes only. Created with the ANSI/IES TM-30-18 Calculator Version 2.00.

LCS GRAPH

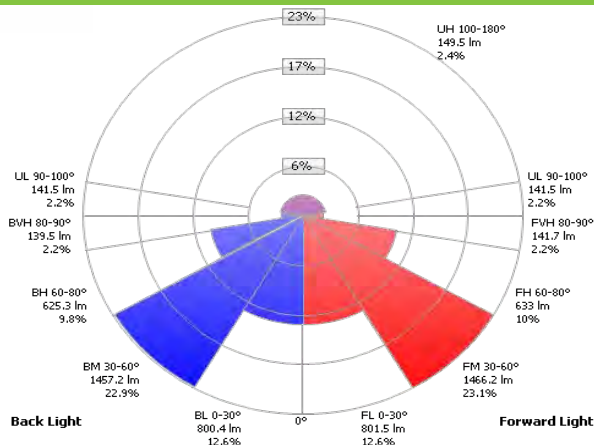

POLAR CANDELA DISTRIBUTION

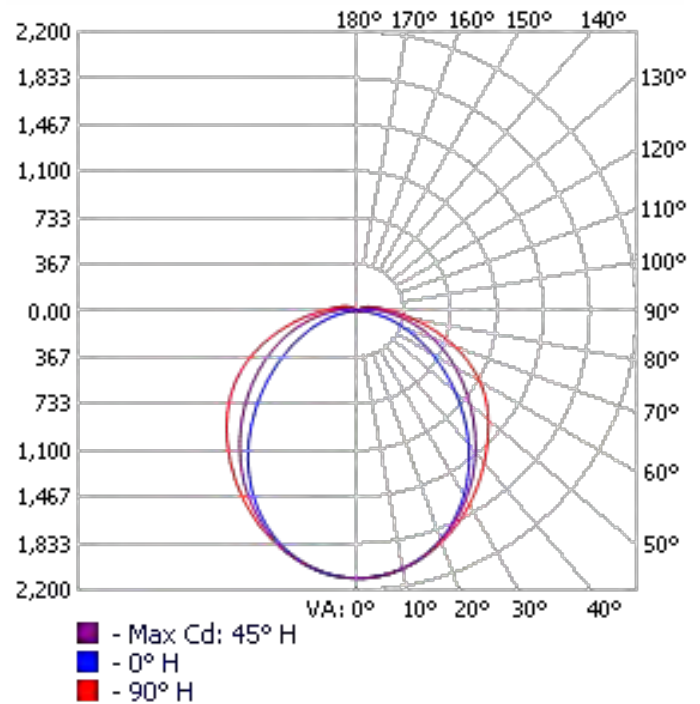

ISOFOOTCANDLE PLOT

