

# FHEX21




## Thermoplastic LED Exit Signs

- Maintenance-free, 6V NiCd battery
- LED charge indicator
- Single or double face
- Push to test switch
- Specification grade design
- Field replaceable snap out / in chevron directional indicator
- Universal mounting pattern knockout in backplate for J-box mounting
- Ideal for: stores, offices, hospitals and school corridors

### General Specifications

Input Voltage	120/277VAC	
Input Current	Red: 0.031A @120VAC	0.010A @277VAC
	Green: 0.033A @120VAC	0.017A @277VAC
Input Power (Nominal)	Red: 3.2W @120VAC	3.6W @277VAC
	Green: 3.8W @120VAC	4.4W @277VAC
Operating Frequency	60Hz	
Operating Ambient Temperature Range (Ta)	10°C to 40°C / 50°F to 104°F	
Overall Size	7.75" H x 13" W x 2" D	
Emergency Operation	90 minutes	
Compliance	UL 924 Listed	
	Damp Location	
Warranty	5 years from the date of manufacture	

### Mechanical Data

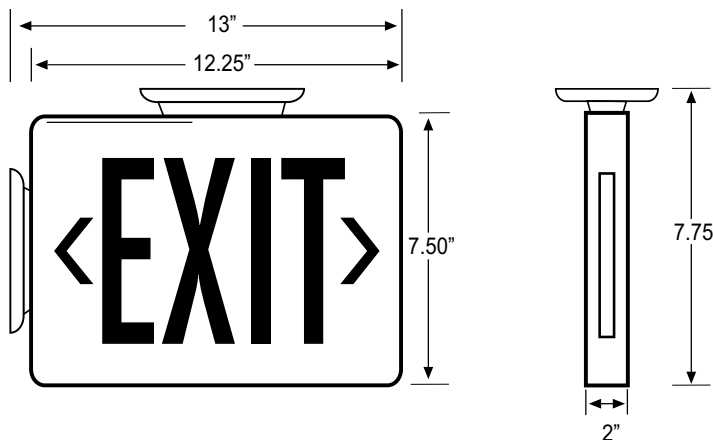

#### NOTE:

1) In order to maintain proper operation and warranty coverage, the battery must be recharged once per year prior to installation.

Multiple mounting options shown.

FRONT VIEW

SIDE VIEW

### Part Number Matrix

# FHEX21

# W

# G

# AC

Case Color  
W = White  
B = Black

Letter Color  
R = Red  
G = Green

Operation  
AC = AC Only  
EM = Battery Backup

Options  
Blank = Standard  
RC = Remote Capable  
SD = Self Diagnostic\*

\*Self-Diagnostic option tests the fixture every 30 days for 15 minutes and once every 12 months for a full 90 min discharge test. After each test the battery is recharged automatically and the unit returns to normal operating mode. Any problems found during or after the test are reported through the user interface.