

LED LINEAR HIGHBAY



MODEL: AALHBP105W4KF120347V

SKU: 900031U

LED LINEAR HIGH BAY

ELAKEVIEW ENTERPRISE LTD.

PRODUCT DESCRIPTION

The Elakeview LED Linear Highbay provides high lumen efficacy and energy savings to projects in high ceiling applications. This highbay is an excellent energy efficient replacement for HID or fluorescent fixture.



HIGHLIGHTS

- DLC Premium Listed
- V-hooks provided
- Optional pendant mount
- Damp location rated
- CRI - 82
- 5 Year warranty. Extended Warranty Available
- L70 - 50,000 hours
- Efficacy - 135lm/w
- Optional tri-Level dimmable occupancy sensor
- Wire guard available
- Optional clear or frosted lens
- 0-10V dimmable



lighting facts™
A Member of the IES, IESNA



APPLICATIONS

Designed for manufacturing, industrial, shops, corridor, garage, gymnasium, office, retail and warehouse applications.

ORDERING INFORMATION

ORDER SKU	DLC MODEL #	DLC PRODUCT ID	INPUT VOLTAGE	POWER (W)	EFFICACY (LMW)	DELIVERED LUMENS	CCT(K)	FINISH	SIZE
900023U	AALHBP105W5KF120347V	PLBFM8WMUJTF	AC120-347V	105W	136LMW	14280LM	5000K	white	2FT
900031U	AALHBP105W4KF120347V	PLRZN9G615NL	AC120-347V	105W	135LMW	14175LM	4000K	white	2FT
900025U	AALHBP155W5KF120347V	P8VRB2AM	AC120-347V	155W	139LMW	21102LM	5000K	white	2FT
900029U	LHBP300W5KFU	S-EV3FID	AC120-347V	300W	136LMW	40800LM	5000K	white	4FT
900023H	AALHBP110W5KF347V	PLLCVRPF3YOB	AC347V	110W	131LMW	14410LM	5000K	white	2FT
900025H	AALHBP162W5KF347V	PL7KBS58AR9G	AC347V	162W	131LMW	21222LM	5000K	white	2FT
900032H	AALHBP162W4KF347V	PLHRJX9IK2EK	AC347V	162W	130LMW	20512LM	4000K	white	2FT
900027H	AALHBP223W5KF347V	PL87NI8FX1EZ	AC347V	223W	131LMW	29213LM	5000K	white	4FT

REV 1

LED LINEAR HIGH BAY

ELAKEVIEW ENTERPRISE LTD.

PRODUCT FEATURE


- LED Saves 70-80% of energy over HID and 50-60% over T8/T5HO.
- Die formed of 24 gauge cold-rolled steel body.
- All steel surface are painted after fabrication with high gloss baked white matte power painted.
- V-Clips for Dual Point Chain or Cable Hanging.
- Damp location rated.
- CRI-82
- Tool-Less Hinged bottom LED Driver access doors.
- High transmission opaque acrylic lens.
- High LMW (Lumen per watt)
- 0-10V continuous dimming, optional tri-level occupancy sensor (50%-30%-10%-0)
- UL/cUL Listed, RoHS Compliant, Design Lights Consortium (DLC) Qualified Products List

• 5 years warranty, 100,000hrs Lifespan, Extended warranty terms available

PRODUCT SPECIFICATIONS

LED TYPE	WATTS	SYSTEM EFFICACY	LUMENS	COLOR TEMP	BEAM ANGLE	CRI	VOLTAGE	POWER FREQ	DIMMING	POWER FACTOR	THD
SEOUL	105W	135 LM/W	14175	4000K	150°	82	120-347V	50/60HZ	0-10V	0.9	10%

DIMENSIONS

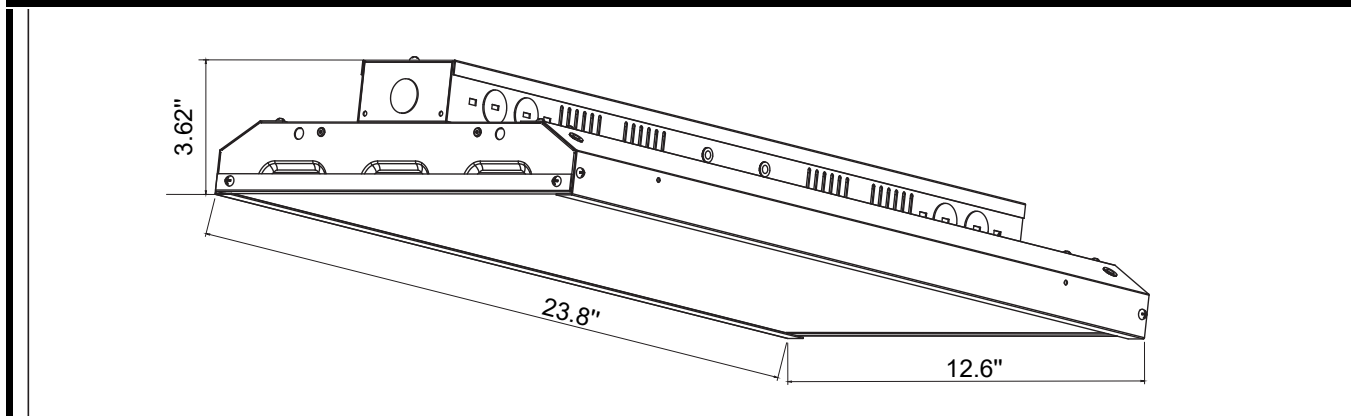

MOUNTING OPTIONS


V-hooks provided



Optional Pendant Mount



OPTIONAL ACCESSORIES



WIREGUARD

SKU

LHWG155W



OCCUPANCY SENSOR

SENPIRAC120347VOF



OCCUPANCY SENSOR

SENPIRAC120347VD

REV 1