

PROJECT NAME: \_\_\_\_\_ CAT. #: \_\_\_\_\_  
 NOTES: \_\_\_\_\_ FIXTURE SCHEDULE: \_\_\_\_\_

## Control Node - Rectangular Microwave Motion Sensor & Photocell




### Features

- Simple "Plug-and-Play" Connection - Easy to install in the field with pre-installed USB-C receptacle in controls ready fixtures
- Control Technology: Microwave for Motion sensing + Photocell
- Includes locking screw (16mm) to resist vandalism and withstand vibration (Requires M2.5 Allen wrench)
- Easy Programming with IR Remote (CN-REMOTE sold separately) - Save and store settings to minimize commissioning time
- 0-10V Dimming Method - with dim-to-off capability
- Bi-Level Dimming
- Ability to set High Trim
- Daylight Harvesting via Photocell (ON/OFF)
- Check <https://www.maxlite.com/cmax/> for c-Max fixture compatibility
- 5 Year Warranty

### Ordering Information

| MODEL NUMBER | ORDER CODE |
|--------------|------------|
| CN-RTMST     | 105564     |
| CN-REMOTE    | 105567     |

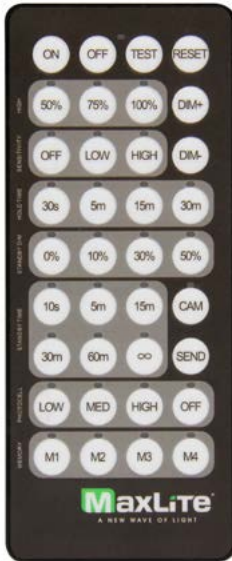

Requires at least one CN-REMOTE per project for commissioning  
**(remote control sold separately)**

### Specifications

|                             | CN-RTMST                                                                                         |
|-----------------------------|--------------------------------------------------------------------------------------------------|
| OPERATING VOLTAGE           | 12-20VDC                                                                                         |
| OPERATING CURRENT           | max 30mA                                                                                         |
| SINKING CURRENT             | max 25mA                                                                                         |
| SENSOR TECHNOLOGY           | Microwave (5.8GHz)*, Photoelectric                                                               |
| CONTROL OUTPUT              | 0-10V                                                                                            |
| RECOMMENDED MOUNTING HEIGHT | 8-15ft / 2.5-4.5M                                                                                |
| MAXIMUM MOUNTING HEIGHT     | 35ft / 10M                                                                                       |
| CONNECTOR INTERFACE         | USB-C                                                                                            |
| COMMISSIONING PROTOCOL      | IR                                                                                               |
| CERTIFICATION               | cULus Listed E511069 (Damp Listed), California Title 20 Compliant, FCC Part 15 Subpart B Class A |
| OPERATING TEMPERATURE       | -30°F to 130°F / -35°C to 55°C                                                                   |
| OPERATING HUMIDITY          | 0-85% RH Non-Condensing                                                                          |
| PHOTOCELL                   | LOW(1FC) / MEDIUM(20FC) / HIGH(50FC) (PC OFF)                                                    |
| HIGH TRIM                   | 50%, 75%, 100%                                                                                   |
| OVERALL DIMENSIONS          | 1.91" X 0.8" X 0.57" / 48.5mm X 20.5mm X 14.6mm                                                  |
| COLOR                       | Translucent                                                                                      |
| WEIGHT                      | .45oz/12.8g                                                                                      |

\*Not recommended for applications with other high frequency interference




5-year standard warranty (further details available at [www.maxlite.com/warranties](https://www.maxlite.com/warranties)) Product may be eligible for a warranty extension to 10 years, for an additional fee. Contact MaxLite for details.


## Control Node - Rectangular Microwave Motion Sensor & Photocell

### Product Dimensions

TOP

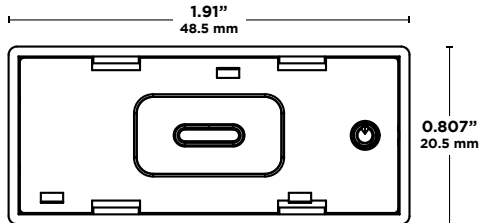


SIDE

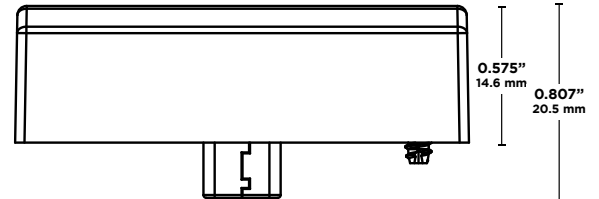


\*Requires M2.5 Allen wrench

### Detection Coverage

SENSITIVITY HIGH

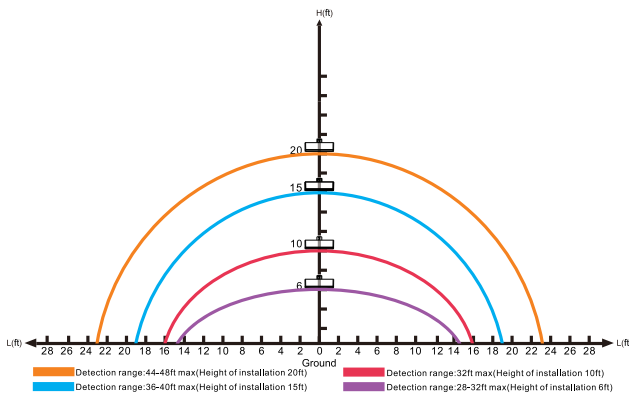

SENSITIVITY LOW

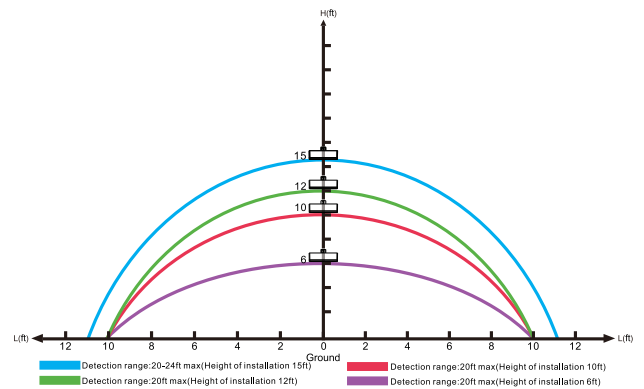

Click on [www.maxlite.com/cmax](http://www.maxlite.com/cmax) for cMax fixture compatibility and installation video.



## Basic Control Remote - Quick Guide



Check out the  
remote commissioning  
video here.



### Remote Settings

| FEATURE      | DEFINITION                                                                                                   | SETTINGS                                                              |
|--------------|--------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------|
| HIGH MODE    | Set High Trim or Maximum light output setting                                                                | SET MAXIMUM THRESHOLD VALUE 50/75/100%.<br>(SENSOR DEFAULT = 100%)    |
| SENSITIVITY  | Set motion detection sensitivity                                                                             | OFF (NO OCCUPANCY) / LOW (50%) / HIGH (100%)<br>(SENSOR DEFAULT=HIGH) |
| HOLD TIME    | Time luminaire stays at the High Trim threshold when no motion detected before going into Standby Dim level. | 30S/5M/15M/30M<br>(SENSOR DEFAULT=5MIN)                               |
| STANDBY DIM  | With no motion detected and hold time elapsed, light output is reduced to this level                         | 0/10/30/50% (SENSOR DEFAULT=50%)                                      |
| STANDBY TIME | With no motion detected, length of time luminaire stays at the Standby Dim level before turning OFF.         | 10S / 5MIN / 15MIN / 30MIN / 60MIN / ∞<br>(SENSOR DEFAULT=30MIN)      |
| PHOTOCELL    | Turns luminaire ON/OFF based on photosensor settings. (Outdoor application)                                  | LOW(1FC) / MEDIUM(20FC) / HIGH(50FC)<br>(SENSOR DEFAULT = PC OFF)     |

Default settings can be changed during commissioning  
For Standby Dim, "0%" means on/off control. There is no standby dimming level.  
For Standby time "∞" means bi-level dimming control. Luminaire will never turn off.

### Memory Mode (Commissioning)

To begin commissioning, follow the steps below:

1. Select either M1, M2, M3, or M4.
2. Indicator lights on the remote will illuminate to indicate the current saved settings.
3. Settings can be changed by pressing appropriate buttons in the highlighted gray area of the remote. (HIGH, SENSITIVITY, HOLD TIME, STANDBY DIM, STANDBY TIME, and PHOTOCELL).  
Review selected settings and make changes as necessary.
4. Point remote to desired luminaire to commission and press "SEND".
5. If configuration is successful, luminaire will blink suggesting settings are saved.

Note that any changes made to the sensor settings are automatically saved to the memory banks M1, M2, M3 or M4 and will override previous settings.

If commissioning multiple luminaires, select the configured memory mode M1/M2/M3/M4 then follow steps 4 and 5.

### Test Mode

Press "TEST" to enter test mode. Luminaire will blink.

Test mode will last five (5) minutes then return to previous setting.

|              |           |
|--------------|-----------|
| HOLD TIME    | 2 Seconds |
| STANDBY DIM  | 50%       |
| STANDBY TIME | 2 Seconds |

### To Turn Lights ON

Press "ON" to turn luminaire on.

### To Turn Lights OFF

Press "OFF" to turn luminaire off.

### Manual Dimming Mode

Press "ON", luminaire will blink, then press DIM+ or DIM- to adjust dimming level.

### Daylight Harvesting (Photocell ON/OFF)

As part of the memory mode commissioning, photocell can be set at either Low, Medium, High. Continuous adjustment mode (CAM) is not recommended with CN-RTMST.

### Reset Mode

Press "RESET" to enter reset mode. Luminaire will blink to indicate reset is complete. Sensor will default to original settings shown in the above table.