

# access

## LIGHTING

### INSTALLATION INSTRUCTIONS

#### IMPORTANT SAFETY INSTRUCTIONS MESURES DE SECURITE A RESPECTURE

Before assembling your ACCESS LIGHTING fixture, please make sure that you carefully read through this instruction sheet. Save this instruction sheet and refer to it when additions to or changes in the fixture configuration are made.  
Lisez attentivement ce manuel d'instructions. Enregistrer cette feuille d'instructions et de s'y référer lorsque les ajouts ou changements dans la configuration de montage sont faites.

CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.

CONSULTER UN ELECTRICIEN QUALIFIE POUR VOUS ASSURER QUE LES CONDUCTEURS DE LA DERIVATION SONT ADEQUATS

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

CE PRODUIT DOIT ETRE INSTALLE SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAIT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHERENTS

**NOTE:** The important safeguards and instructions that appear in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care, are factors that can't be built into any product. These factors must be supplied by the person(s) caring for and operating the fixture.

Read all instructions

Do not install this fixture in hazardous locations.

N'installez pas cet appareil dans des emplacements dangereux.

Do not install any fixture assembly closer than 6 inches from any curtain or similar combustible material.



Laisser une distance d'au moins 6 pouces entre ce luminaire et la toute surface combustible.

"WARNING Risk of Fire and Electric Shock."

"CAUTION: Risque d' Incendie et de Choc Electriques."

#### GENERAL INFORMATION

All electrical connections must be in accordance with all ordinances, Local and the U.S. National Electrical Codes (NEC). These fixtures are intended for mounting to a standard 4" metal octagon outlet box. The box must be directly supported by the building structure and U.L. Recognized.

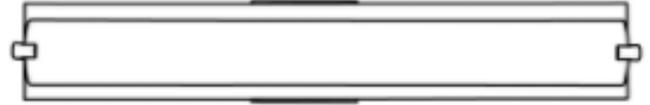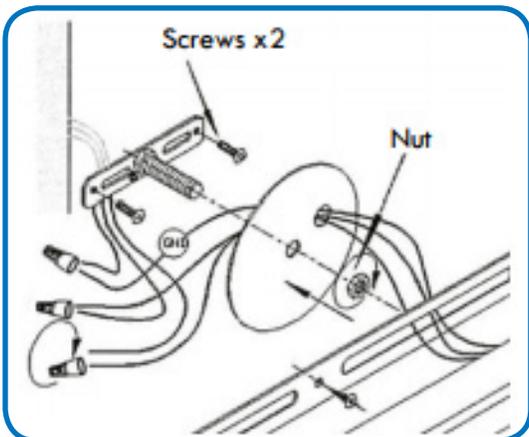

**COLLECTION**  
Geneva

**APPLICATION**  
WALL FIXTURE

**MODEL NO.**  
31010LEDD

#### WHAT WE PROVIDE

- Back Plate
- Mounting Hardware
- LED Module
- Glass Shade
- Glass Frame

#### WHAT YOU NEED


- Screwdriver
- Wire Cutters
- Wiring Supplies as Specified by the Electrical Code

#### STEP BY STEP INSTRUCTIONS

Before starting your installation disconnect the Power by turning off the Circuit Breaker or by removing the fuse at the fuse box. Just turning the light off at the light switch is not sufficient to prevent electrical shock.

#### PREPARE THE FIXTURE


If there is an existing fixture remove it.  
Expose the supply wire from the outer box.  
Secure the crossbar to the J-box with the supplied screws. Make sure that the Nipple already inserted into the Crossbar faces outward.  
Fit the Fixture Wires through the outer hole in the Metal Plate..

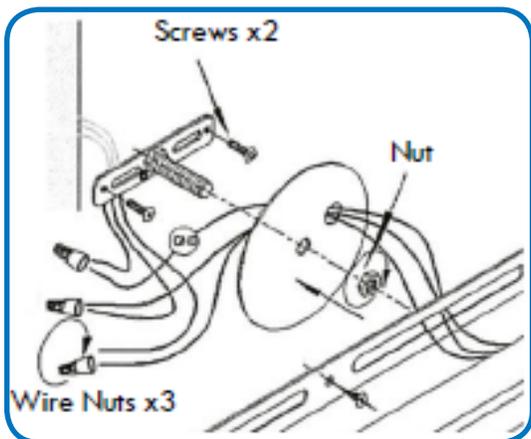

2

**CONNECT THE WIRES**

Gently pull the supply wires through the hole in the crossbar plate. Connect the black supply wire to the black fixture wire. Secure with the supplied wire nuts. Connect the white supply wire to the white fixture wire. Secure with the supplied wire nuts. Attach the green J-Box wire around green hexagonal head screw or connect it to the green supply grounding wire of the fixture. Secure all wires with electrical tape (not supplied). Tuck all wires carefully into the J-Box.

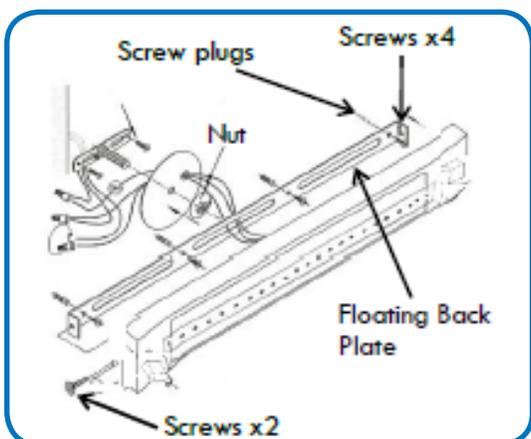


3

**MOUNT FIXTURE TO THE CROSSBAR PLATE**

Determine the best location for your fixture. Position the Floating Back Plate as desired, mark screw holes with a pencil and then drill holes. Place the supplied Screw Plugs into the holes. Insert Nipple through the Center Hole in the Metal Plate. Now fit the Nipple through the closest hole available in the Floating Back Plate. Secure with the supplied Nut.

Secure the Floating Back Plate to the wall with the supplied Screws.


Fit the Fixture Plate over the Floating Back Plate ensuring that the two holes on either end of both plates are aligned. Secure with the supplied Screws.

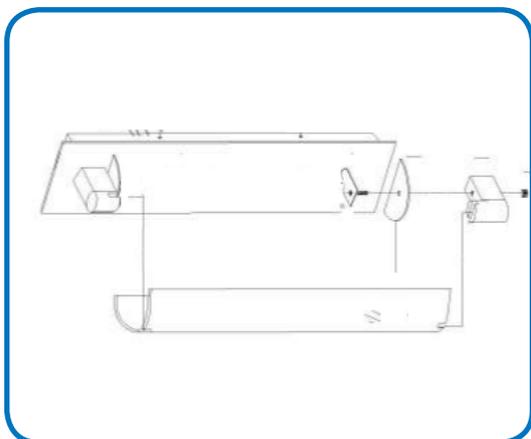

4

**SECURE THE GLASS SHADE**

Place the top flat glass onto the base of the top glass holder by allowing the screw to pass through the center of the flat glass. Fit the bottom of the glass shade into the rivet in the bottom holder. Position the top holder so that the glass shade fits into the rivet of the top holder and secure the top holder with the brass nut.

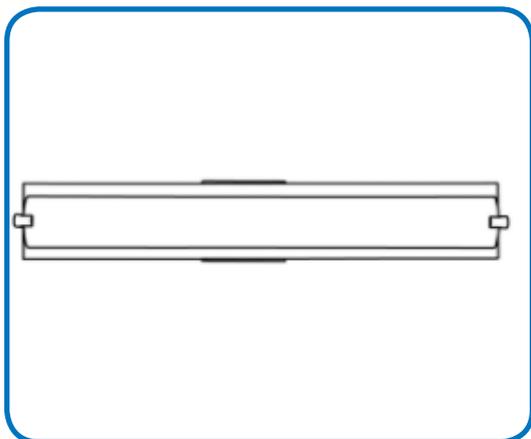

5

**RESTORE THE ELECTRICITY AND CHECK THE OPERATION OF YOUR NEW ACCESS FIXTURE**

**CAUTION**

If the fixture is to be removed or replaced, please ensure that the electricity is switched off and that the fitting is cool before touching