

WRAP AROUND LIGHTS 4WA-PG-3CCT+W+S



WARNING

WARNING — THE INSTALLATION MUST BE CARRIED OUT BY A QUALIFIED ELECTRICIAN.

- LED Wrap Around Lights are suitable for using in dry locations
- Please keep the LED Wrap Around lights away from any corrosive substance, and please use dry cloth when you clean it
- Before installation or maintenance, please disconnect the power to prevent electric shock

CAUTION


PLEASE READ INSTRUCTION BEFORE COMMENCING INSTALLATION AND RETAIN FOR FUTURE REFERENCES.

- Electrical products can cause death or injury, or damage to property.
- If in any doubt about the installation or use of this product, consult a competent electrician.

APPLICATION NOTICE

1. DO NOT cover the fixtures with flammable materials.
2. Misuse of, or changes to the fixture shall nullify the guarantee.
3. When a lamp is to be cleaned, make the power off and let it cool down completely.
4. Clean the fixture with a soft cloth and a standard PH neutral detergent.
5. Re-lamping only can be done when the power is off and the lamp is completely cooled down.


CCT & WATTAGE SELECTABLE

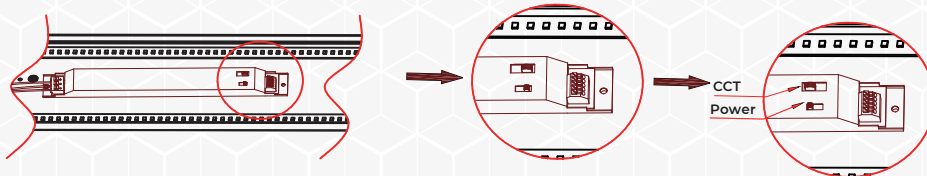


INSTALLATION GUIDE

PENDANT CHAINING INSTALLATION

1. Install the main hooks according to the spacing shown in (STEP 1) (Main hooks are not provided).
2. Take the fixture hooks and hanging chain from the accessory bag.
3. Put the hanging chain into the fixture hook, get the hook into the fixture back shell as shown in figure (STEP 3).

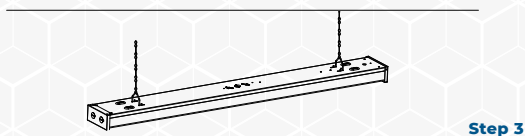

4. Hook the chains into the ceiling main hooks.

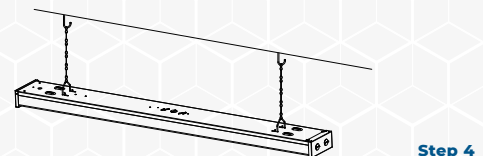

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.




WRAP AROUND LIGHTS 4WA-PG-3CCT+W+S





INSTALLATION GUIDE

PENDANT CHAING INSTALLATION

5. Make the wiring as (STEP 5).
6. Get the wire connecting terminals inside of back shell.
7. Install the wire tube into the fixturehousing and tear off the protective film on the lens.





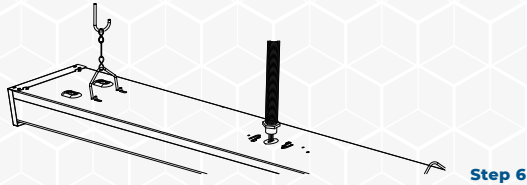


8. Select the desi red colour temperature and power.
9. Use the screwdriver to open the buckle at the end cap of both sides.
10. Attach the diffuser to the housing.

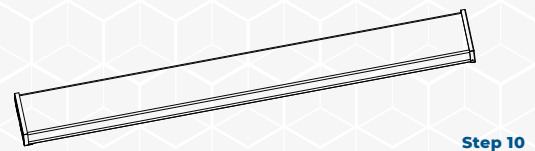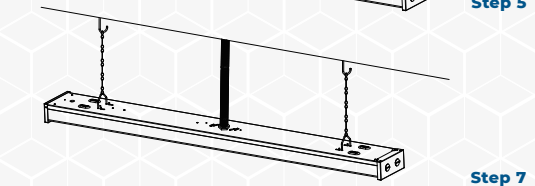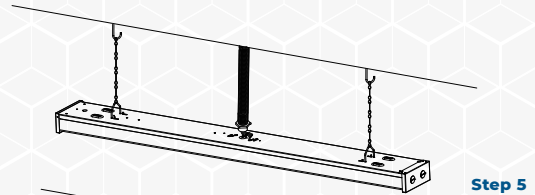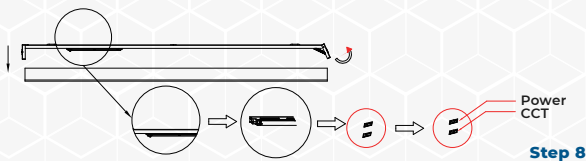

SURFACE MOUNTING INSTALLATION

1. Drill 4 holes in the ceiling as (STEP 1); insert the anchor into each hole (Distance of holes as shown in figure).
2. Use the screwdriver to open the buckle at the end cap of both sides.
3. Make the wiring according to (STEP 3) and use the provided cable ties to organize the cables and put them into the junction box.
4. Screw the fixture back shell to the ceiling (screws provided).
5. Tighten the screws to complete back shell installation.
6. Select the desi red color temperature and power.
7. Use the screwdriver to open the buckle at the end cap of both sides.
8. Attach the diffuser to the housing.

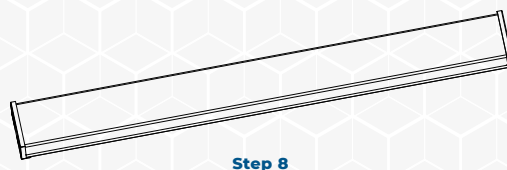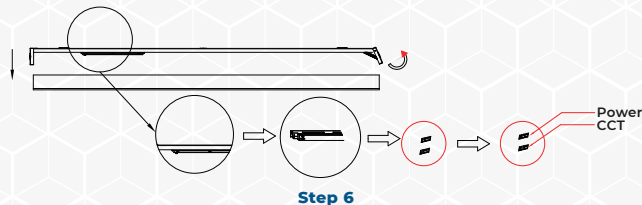

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.





WRAP AROUND LIGHTS 4WA-PG-3CCT+W+S





INSTALLATION GUIDE

JUNCTION-BOX INSTALLATION


1. Get the screws(not supplied) in to the junction box and reserve 1/4" outside.
2. Use the screwdriver to open the buckle at the end cap of both sides.
3. Make the wiring according to **(STEP 3)** and use the provided cable ties to organize the cables and put them into the junction box.
4. Align the screws on the junction box to the back shell of future, so that junction box is attached to the back shell and then rotate clockwise.

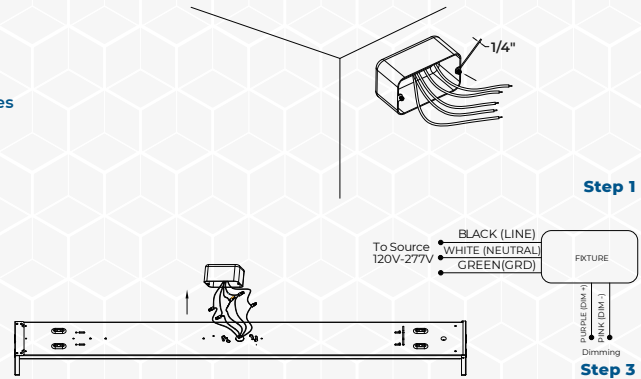

5. Tighten the screws on the front of the fixture back shell to complete the assembly of the junction box.
6. Embed one terminal of lens to one end cap first, then embed other terminal to other end cap, push one terminal into the end cap.
7. Select the desired color temperature and power.
8. Attach the diffuser to the housing.

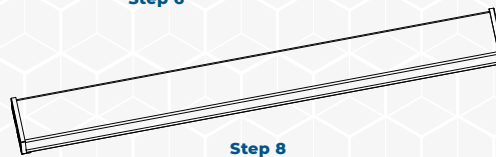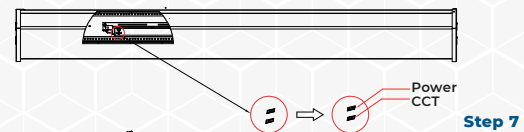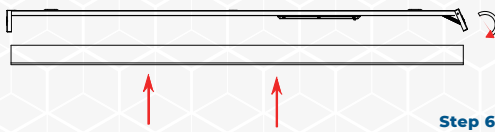

WIRING DIAGRAM

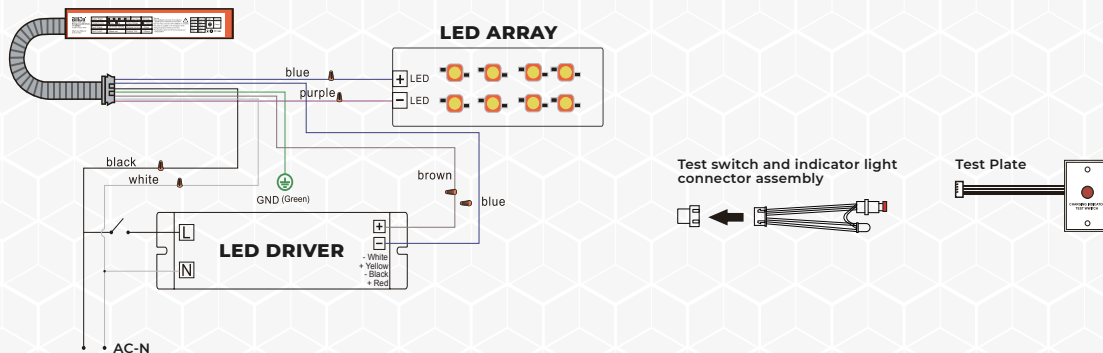

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.