

MODEL OT-150W



WARNING

WARNING — THE INSTALLATION MUST BE CARRIED OUT BY A QUALIFIED ELECTRICIAN.

1. Mounting the transformer outdoors is recommended.
2. If mounted indoors, then codes should be followed that apply to indoor wiring — especially for wires that pass through exterior walls
3. Transformer is designed for above ground installation only
4. Transformer **MUST** be mounted in a vertical orientation with the bottom plate at least 1 feet from the ground

Application Notice

TO REDUCE THE RISK OF FIRE, ELECTRIC SHOCK, OR INJURY TO PERSONS, READ THE INSTRUCTIONS BELOW:

1. Transformer **MUST** be installed in accordance with the National Electric Code and local code specifications. Failure to follow these codes and installation will void the warranty and may result in serious injury and/or damage to the fixture
2. Install the Transformer at least 5 feet (1.5m) from pool or spa and at least 10 feet (3.05m) from a fountain
3. This Transformer **MUST** be connected to GUCCI-protected receptacle.
If the receptacle is outdoors, then it **MUST** be protected by an in use weatherproof cover
4. It is normal for the unit to become hot. **DO NOT** allow contact with PVC or plastic sidings. In hot climates, avoid mounting in direct sunlight, but allow photocell to be exposed to sky. When near saltwater, protect unit by enclosing in weatherproof structure

CAUTION

PLEASE READ INSTRUCTION BEFORE COMMENCING INSTALLATION AND RETAIN FOR FUTURE REFERENCES.

Electrical products can cause death or injury, or damage to property.

If in any doubt about the installation or use of this product, consult a competent electrician.

INSTALLATION GUIDE

Circuit Breaker


OT-150W has a built-in circuit breaker to help protect against electrical short circuits.

This does not prevent the need to use GFCI outlets marked for "wet location".

It also does not prevent the requirement to follow all local and electrical building codes for the main circuit breaker protection.

If a circuit break occurs, immediately disconnect the transformer from the power source. Make all repairs to the lighting system that cause the circuit breaker to trip. Once the problem has been resolved, reset the breaker by switching to the ON position

Features and Controls

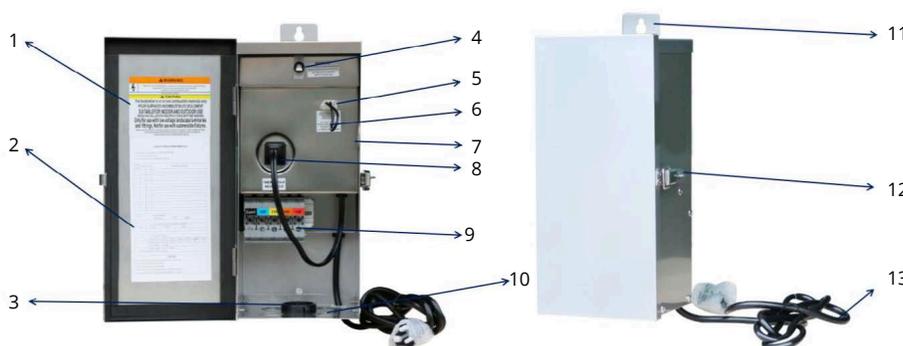

1. Warning Label
2. Operating Record
3. Conduit Cover
4. Overload Circuit Breaker
5. Photocell Plug
6. Testing Loop
7. Photocell Knockout
8. Timer Receptacle
9. Terminal Block
10. Knockout
11. Mounting Tab
12. Lockable Latch
13. Power Cord

MODEL OT-150W

INSTALLATION GUIDE

Mounting Transformer

1. Mount transformer to solid surface or stand using stainless steel screws and anchors if needed (hardware not included)
2. Screws will pass through key holes. Use bubble level to ensure vertical mounting
3. Bottom of transformer MUST be at least 1 feet above the ground

Transformer Sizing

1. The total lamp VA (load) of all fixture connected to one transformer MUST NOT exceed 70% of the VA capacity of the transformer
2. Therefore, the transformer selections are primarily based on Total Fixture Load:

$$\text{TOTAL FIXTURE LOAD (Watts or VA)} \div 0.7 = \text{Minimum Transformer Capacity}$$

Example) The total fixture load is 200W, divide by 0.7 to equal 286W, a 300W transformer would be ideal.

Select Your Wire

1. We recommend using 12AWG low voltage direct landscape wire.
2. It is important to distribute fixtures evenly along the cable with higher wattage fixtures closer to the transformer if possible
3. Only use the bottom terminals for wiring to lighting
4. DO NOT loosen the top terminals. They are for internal wiring of the transformer
5. The higher voltage terminals are for long wire runs to lights. These will help account for voltage loss along the long run of wire

Voltage Loss Calculation

(Distance (Ft.) X Load (W) X 2) ÷ Cable Constant = Voltage Loss

Wire Gauge	Cable Constant	Wire Gauge	Cable Constant
#18/2	1380	#12/2	7500
#16/2	2200	#10/2	11920
#14/2	3500		

Select Voltage Taps

Transformer are Multi-Tap — giving you a selection of voltages for your wire run connections. Selecting a higher voltage at the transformer compensates for voltage that may be lost along wire runs.

Installing a Photocell

1. Disconnect the power supply from the transformer before installing the photocell.
2. Remove the inner knockout located on the side of the transformer
3. DO NOT remove the outer portion of the knockout or the photocell will not fit properly
4. To remove the inner portion, use a screwdriver to bend the tabs forward
5. Use a set of pillars to twist and bend the tabs until the inner knockout breaks loose
6. Insert the wire and connector of the photocell through the hole in the side of the transformer
7. Place the nut around the wire and screw onto the photocell, holding the unit in position



Remove the nut from the photocell.



Unplug the jumper connection from the transformer



MODEL OT-150W

INSTALLATION GUIDE

Installing a Photocell



8. Plug the photocell into the now empty socket connection

Installing a Timer



1. Disconnect the power source from the transformer before installing the timer
2. Unplug the plug as shown on the left



3. Insert that plug into the side of the timer as shown on the above



4. Insert the timer into the outlet on the transformer as shown on the above picture

Check the System

1. After installing the entire low voltage system, operate the system for five minutes. On the low voltage side, all electrical connections spots should be cool to touch.
2. If connection is hot to the touch, re-tighten the connection and check to ensure that the temperature decreases
3. Place the transformer cover back and tighten all four provided screws on both sides