

FEATURES & SPECIFICATIONS

INTENDED USE

Provides general illumination in commercial and residential applications. Use 3-position switch to select 3000K, 4000K or 5000K color temperature at time of installation. Ideal for use in closets, foyers, hallways, corridors, bedrooms, offices, utility work areas, stairways and much more.

CONSTRUCTION

This contemporary shaped fixture features a matte white acrylic diffuser and a robust aluminum housing.

OPTICS

50,000 hours life. Rated for 50,000 hours at >70% lumen maintenance. 90+ CRI

3000 K: 636 lumens

4000 K: 695 lumens

5000 K: 656 lumens

Factory set at 3000K CCT

ELECTRICAL

Fixture operates at 120 volts, 50/60 Hz. 7" Round standard input = 12.2 watts.

Works with most standard incandescent dimmers (see list of suggested dimmers on page 2).

INSTALLATION

All mounting hardware included.

LISTINGS

CSA certified to UL standards for sale in the USA and Canada.

Also certified for Damp Location. ENERGY STAR® certified

Round Versi U.S. Patent No. D691,763.

Certified to the high efficacy requirements of California T24 JA8-2016

WARRANTY

5-year limited warranty. Complete warranty terms located at:

www.acuitybrands.com/support/customer-support/terms-and-conditions

NOTE: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.


Catalog Number
Notes
Type

Decorative Indoor

Versi Lite™ LED Switchable White Flush Mount



HIGH-PERFORMANCE LED



3-position switch for selecting 3000K, 4000K or 5000K located on top of fixture


Round Specifications

Height: 1-3/4 (4.4)

Width: 7-1/4 (18.4)

Weight: 1.1 lbs (.5 kg)

All dimensions are inches (centimeters) unless otherwise indicated.

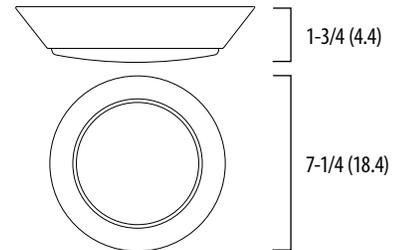

ORDERING INFORMATION

Example: FMMLS 7 SWW2

Series	Size	CRI	Color temperature	Fixture finish
FMMLS LED Versi Lite switchable white flush mount	7 7" diameter	>90	SWW2 3000K/4000K/5000K	(blank) Textured white

Replacement parts: Order as separate catalog number.	
DFMML7	7" round acrylic diffuser


FMMLS Versi Switchable White Flush Mount

LIGHTING FACTS

Suggested Dimmers			
<i>The FMMLS is designed to operate with most standard Triac based dimmers and is not compatible with 0-10V dimming systems. The following is a list of dimmers tested and does not imply any guarantee or warranty of compatibility with a particular application. Unlisted dimmers do not imply non-compatibility.</i>			
Manufacturer	Part Number (s)	Manufacturer	Part Number (s)
Lutron	SCL-153P	Lutron	MAELV-600
Lutron	S-600P	Leviton	6631
Lutron	DVCL-153P	Leviton	6683
Lutron	CTCL-153P	Leviton	VPE06
Lutron	TGCL-153P	Legrand	RHCL453PTCCV6
Lutron	TBL03		
Lutron	MACL-153M		
Lutron	PD-6WCL		
Lutron	SELV-300P		

PHOTOMETRICS

FMMLS 7 SWW2, 3000K/4000K/5000K, input watts: 12.2, delivered lumens: 695.2, LM/W = 56.98, test no. ISF 20422, tested in accordance to IESNA LM-79.

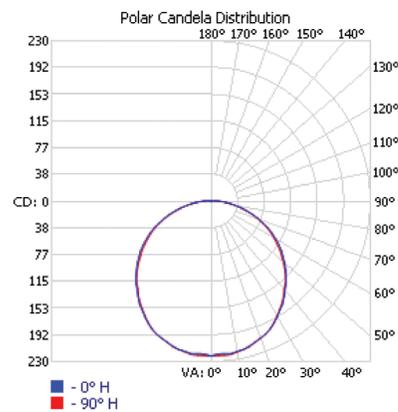

ZONAL LUMEN SUMMARY		
ZONE	LUMENS	% LUMINAIRE
0-30	175	25.2%
0-40	286.8	41.3%
0-60	513.5	73.9%
60-90	167.8	24.1%
70-100	88.3	12.7%
90-120	13	1.9%
0-90	681.3	98%
90-180	13.8	2%
0-180	695.2	100%

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD																		
EFFECTIVE FLOOR CAVITY REFLECTANCE: 20%																		
RCC %:	80				70				50			30			10			0
RW %:	70	50	30	0	70	50	30	0	50	30	20	50	30	20	50	30	20	0
RCR: 0	1.19	1.19	1.19	1.19	1.16	1.16	1.16	.98	1.10	1.10	1.10	1.05	1.05	1.05	1.00	1.00	1.00	0.98
1	1.07	1.02	.97	.93	1.04	1.00	.95	.81	.95	.91	.88	.91	.88	.85	.87	.84	.82	0.80
2	.97	.88	.81	.75	.94	.86	.80	.67	.82	.77	.72	.79	.74	.70	.75	.72	.68	0.66
3	.88	.77	.69	.62	.86	.76	.68	.57	.72	.66	.60	.69	.63	.59	.66	.62	.57	0.55
4	.81	.68	.59	.52	.78	.67	.58	.49	.64	.57	.51	.61	.55	.50	.59	.54	.49	0.47
5	.74	.61	.52	.45	.72	.60	.51	.42	.57	.50	.44	.55	.48	.43	.53	.47	.42	0.40
6	.68	.55	.46	.39	.66	.54	.45	.37	.52	.44	.38	.50	.43	.38	.48	.42	.37	0.35
7	.63	.50	.41	.34	.61	.49	.40	.33	.47	.39	.34	.45	.38	.33	.44	.38	.33	0.31
8	.59	.45	.37	.31	.57	.44	.36	.29	.43	.35	.30	.41	.35	.30	.40	.34	.29	0.27
9	.55	.41	.33	.27	.54	.41	.33	.26	.39	.32	.27	.38	.32	.27	.37	.31	.27	0.25
10	.52	.38	.30	.25	.50	.38	.30	.24	.36	.29	.25	.35	.29	.24	.34	.28	.24	0.22