

BoxLED® MIDI

BL726LED

EACH MODEL NUMBER CONSISTS OF THE FOLLOWING:
 SERIES / OPERATION / LUMENS / WATTAGE / DISTRIBUTION /
 VOLTAGE / WET LOCATION / WEIGHT / DIMENSION

SERIES:	BL726LED
OPERATION:	HT (AC ONLY)/0-10V DIMMING
LUMENS:	LO (6200), MO (8200), HO (11,700)
WATTAGE:	50W/70W/90W
DISTRIBUTION:	SYMMETRICAL ASYMMETRICAL
VOLTAGE:	120-277V; 347V
WET LOCATION:	IP66 / NEMA 4X
WEIGHT:	9LBS.
DIMENSION:	LENGTH: 324MM (12.8") WIDTH: 116MM (4.6") HEIGHT: 319MM (12.6")



IMPORTANT SAFEGUARDS

When using electrical equipment, basic safety precautions should always be followed including the following:

READ AND FOLLOW ALL SAFETY INSTRUCTIONS.

1. Do not let power cords touch hot surfaces.
2. Do not mount near gas or electric heaters.
3. Equipment should be mounted in locations and at heights where unauthorized personnel will not readily subject it to tampering.
4. The use of accessory equipment not recommended by Beluce Canada, may cause an unsafe condition, and will void the warranty.
5. Do not use this equipment for other than its intended purpose.
6. Servicing of this equipment should be performed by qualified service personnel.

SAVE THESE INSTRUCTIONS!


CAUTION ! ALWAYS MAKE SURE THE POWER IS TURNED OFF before starting the installation

Wiring fixture to power supply, shall be performed by a certified electrician, and wired in a manner that complies with all local and national electrical codes, as well as the manufacturer's wiring diagram.


WARNING

No user serviceable parts. Refer service to a qualified service technician. Read instructions prior to installing and/or operating this device. Installation should be performed by a licensed electrician/installer in accordance with local codes.


Flood Mount (Standard)

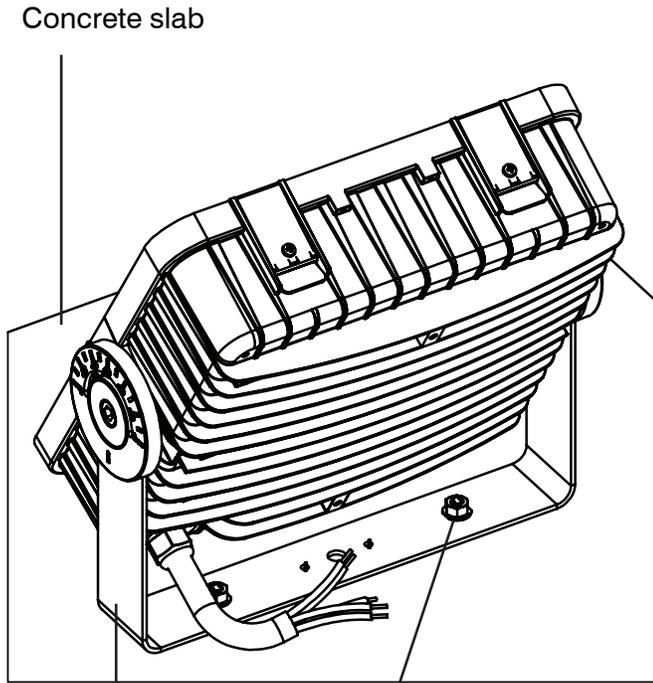


Bracket Anchor stud (by others)

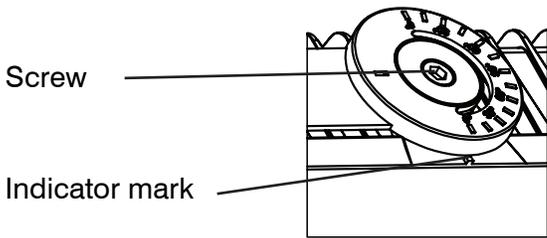

Loosen the screw to adjust the angle. Retighten once the angle is set.

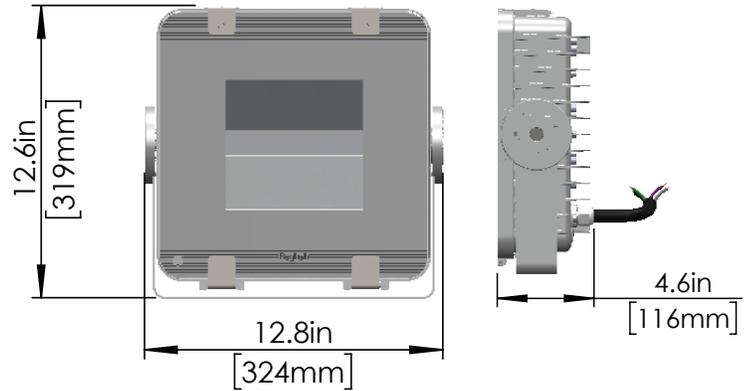

1. Install the fixture to designated location, and use dimension below for bolt's location.

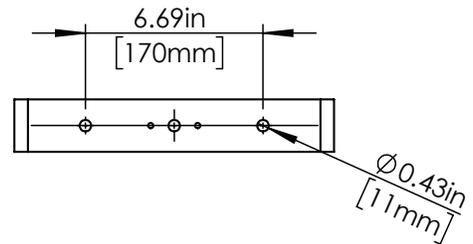


2. Use typical anchor bolts similar to the recommended in size and length. Install anchor bolts according to the anchor bolts installation instruction.



3/8 X 2-1/4"L (Recommended)

0-10V dimming wires must be run from a different conduit out of the J-Box.




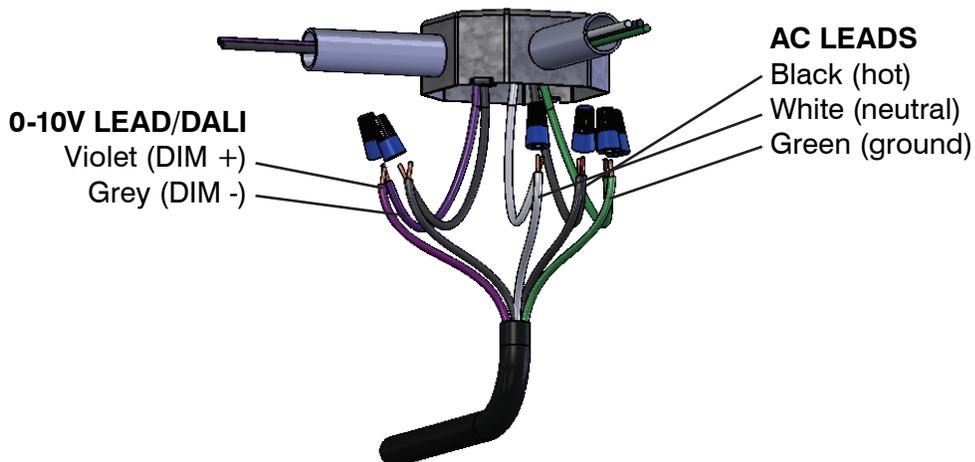


Note: For non-dimming, 3-conductor cord is available (upon request).

926000298



Surface Mounting (SM)

Install the fixture to designated location, use dimension below for the screw locations.

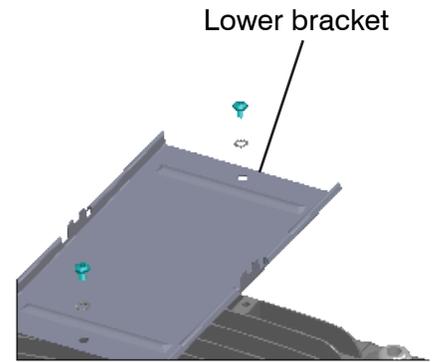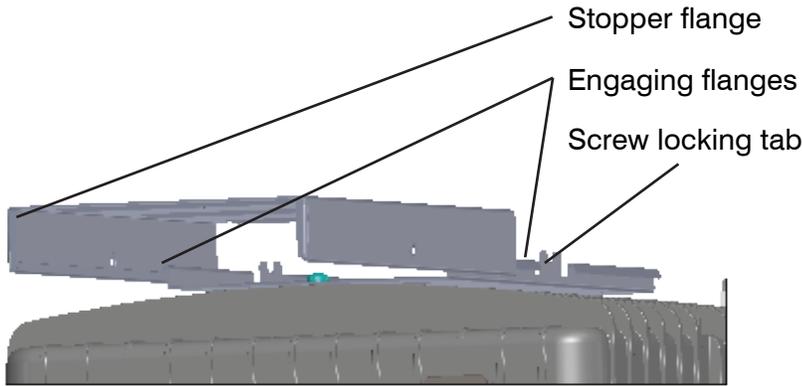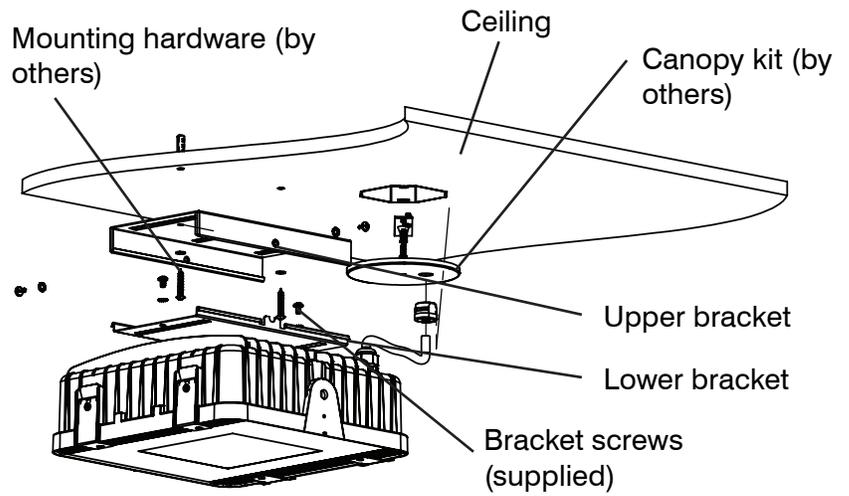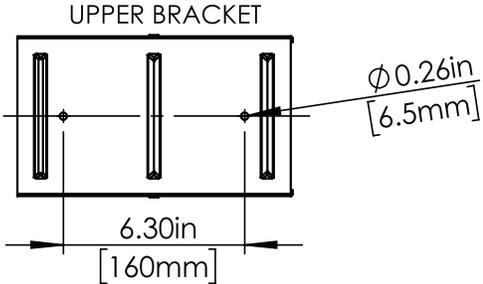



Hook Mount Kit (HK/CP)

Attach the clip-hook to the bracket as shown.

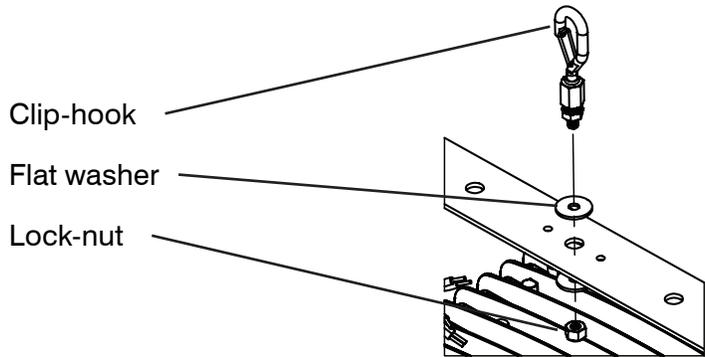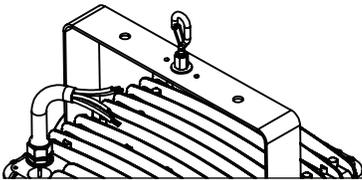

Aviation Cable Kit

Attach cable gripper to the bracket as shown.

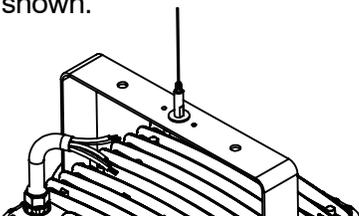



Press down to release lock. Release to engage lock.



926000298



Pendant Kit

Thread one end of stem into the canopy, secured by lock nut, then attach canopy to the octagon box, secured by two screws. Secure the other end of stem to the bracket with two lock nut.

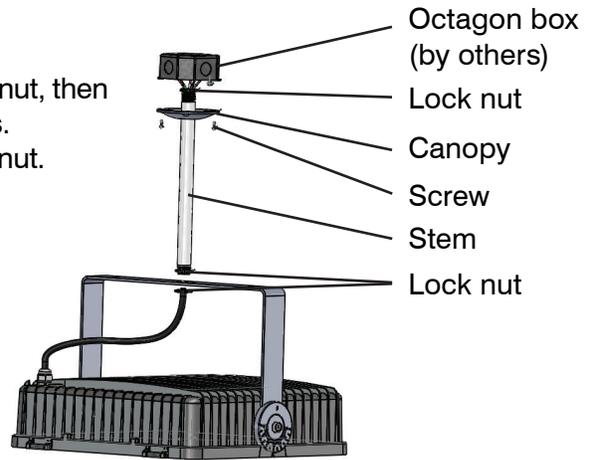

Chain Hang Kit

Attach the eye bolts to the fixture as shown. Hook the chains & eye bolts together and crimp shut as shown.

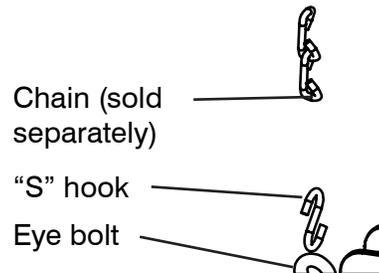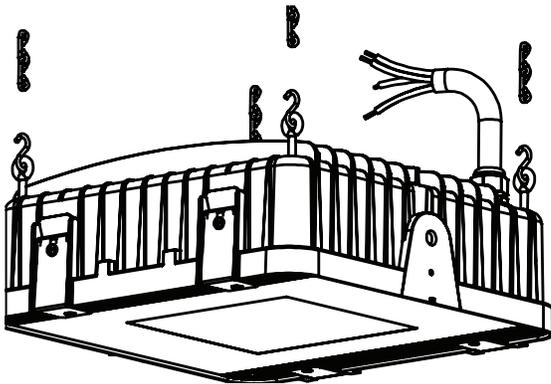

SAVE THESE INSTRUCTIONS!