

Nuvola SL

NUV-SL

EACH MODEL NUMBER CONSISTS OF THE FOLLOWING:
 SERIES / OPERATION / LUMENS / WATTAGE / DISTRIBUTION /
 VOLTAGE / WET LOCATION / WEIGHT / DIMENSION

SERIES:	NUV-SL
OPERATION:	HT (AC ONLY)/1-10V DIMMING
LUMENS:	VLO (12,400), LO (14,800), MO (19,100), HO (24,400)
WATTAGE:	100W/120W/150W/200W
DISTRIBUTION:	MEDIUM, WIDE, VERY WIDE
VOLTAGE:	120-277V; 347V
WET LOCATION:	IP66 / IP69K
WEIGHT:	16 LBS.
DIMENSION:	DIAMETER: 488MM (19.22") HEIGHT: 200MM (7.9")



IMPORTANT SAFEGUARDS

When using electrical equipment, basic safety precautions should always be followed including the following:

READ AND FOLLOW ALL SAFETY INSTRUCTIONS.

1. Do not let power cords touch hot surfaces.
2. Do not mount near gas or electric heaters.
3. Equipment should be mounted in locations and at heights where unauthorized personnel will not readily subject it to tampering.
4. The use of accessory equipment not recommended by Beluce Canada Inc., may cause an unsafe condition, and will void the warranty.
5. Do not use this equipment for other than its intended purpose.
6. Servicing of this equipment should be performed by qualified service personnel.

SAVE THESE INSTRUCTIONS!


CAUTION ! ALWAYS MAKE SURE THE POWER IS TURNED OFF before starting the installation

Wiring fixture to power supply, shall be performed by a certified electrician, and wired in a manner that complies with all local and national electrical codes, as well as the manufacturer's wiring diagram.


WARNING

No user serviceable parts. Refer service to a qualified service technician. Read instructions prior to installing and/or operating this device. Installation should be performed by a licensed electrician/installer in accordance with local codes.

Dimensions

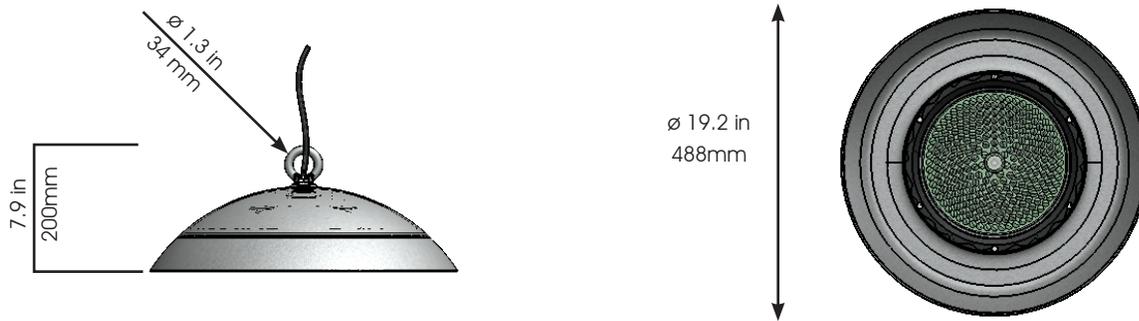


1-10V dimming wires must be run from a different conduit out of the J-Box.

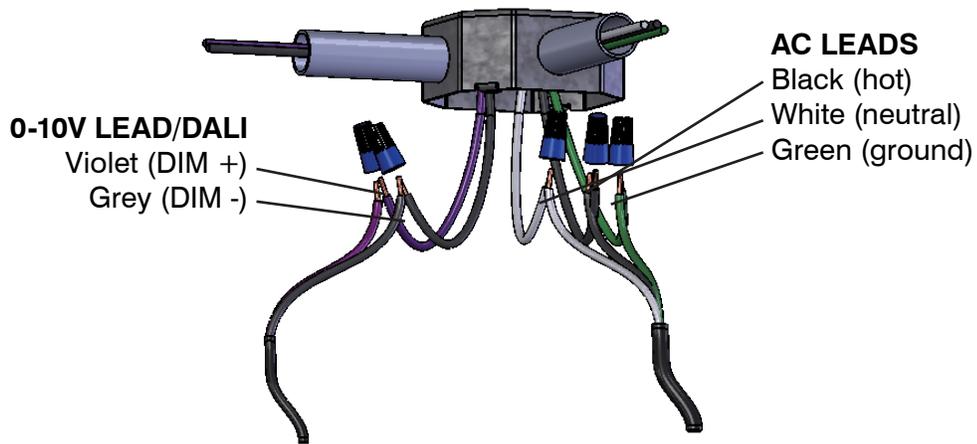




Chain Hang Kit

1. Attach the clip hook on to the chain and the eye bolt on the fixture.

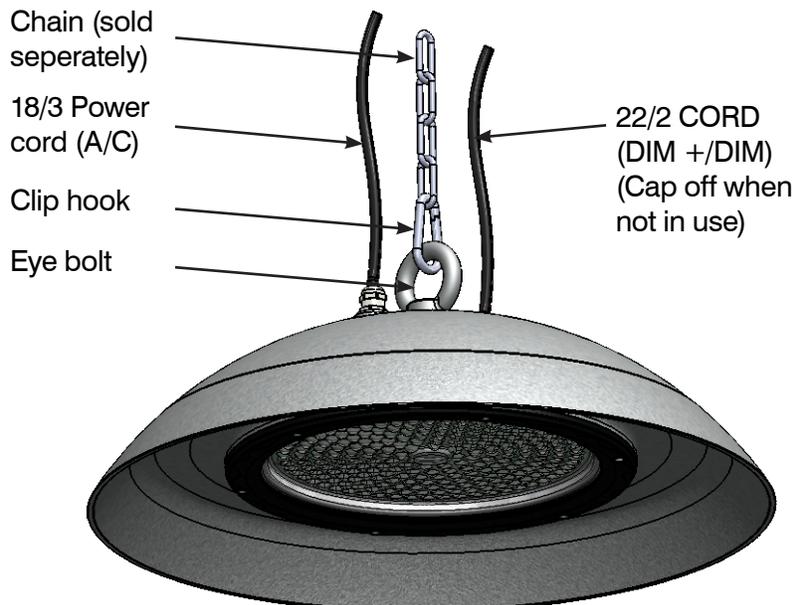

Surface Mount Bracket

1. Remove the Eye bolt on the fixture.
2. Attach the Bracket to the ceiling (mounting hardware by others).
3. Attach the fixture to the bracket as shown.
4. Wire the fixture to AC power

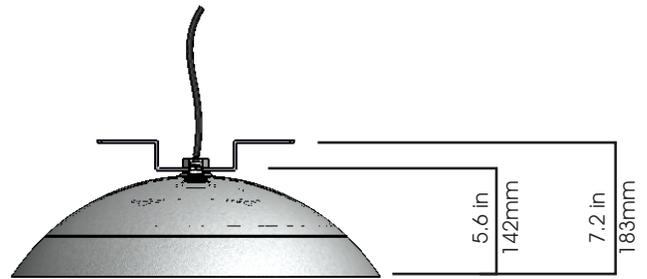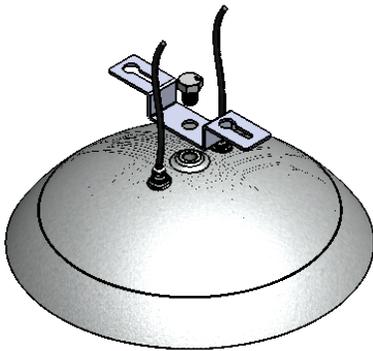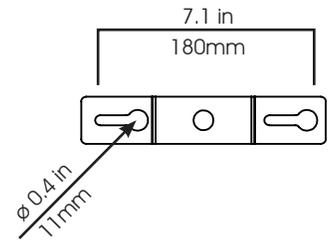

Pendant Kit

1. Remove the Eye bolt on the fixture.
2. Attach the Stem to the Adaptor.
3. Attach the Stem Assembly to the fixture as shown.
4. Attach the fixture to the canopy assembly as shown below.
5. Wire the fixture to AC power

Pendant canopy assembly

