

MARK ARCHITECTURAL LIGHTING™


Slot 2 LED Recessed Linear

Type:

Project:

Catalog Number:

DO NOT TYPE HERE. Autopopulated field.

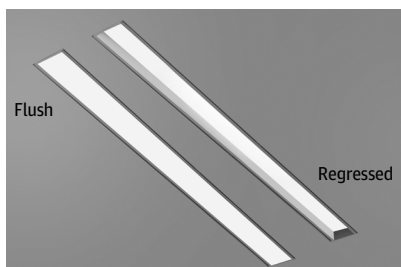

Slot 2 LED takes both form and function a step further with increased efficacy and integral controls creating a digitally addressable luminaire that is perfect where visually harmonious illumination and energy efficiency are desired.

Slot 2 LED is the ideal choice for spaces that emphasize lines and clean contemporary design. It is a perfect fit for Armstrong TechZone™ ceiling systems. A regressed lens option provides added dimension to the sleek, slender design and the flush lens now has a Wet Label option.

Specification Features

Housing

Nominal 2" x 2', 3', 4', 5', 6', 7', 8' and continuous rows in 1" increments as standard, upper housing fabricated from cold-rolled steel with extruded aluminum ceiling trim.

Finish

Painted high reflectance matte white powder coat.

Reflector

Precision-formed steel; high reflectance matte white powder coat; 93% reflectivity.

Shielding

Flush Lens: Snap-in 90% transmissive satin acrylic lens.

Regressed Lens: Lay-in 90% transmissive satin acrylic lens.

Mounting

Recessed. Available for sheetrock, 9/16" slot grid or 15/16" inverted tee ceilings, or 9/16" inverted tee.

Certification

CSA tested to UL 1598 standards. Optional Damp or Wet location listings available, see ordering tree. This product is IC rated.

Warranty

5-year limited warranty. Complete warranty terms located at:


www.acuitybrands.com/support/warranty/terms-and-conditions

Note: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

Technical Drawing

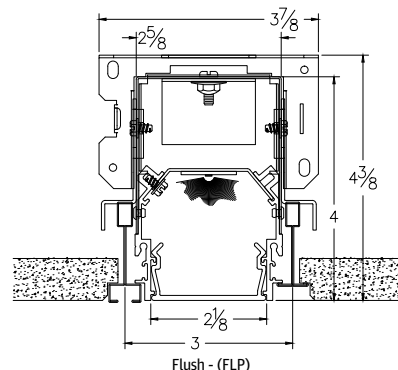

Fixture Performance - SL2L*

Lumens Output	400 LMF		600 LMF**		800LMF**		1000LMF	
Fixture Style	RLP	FLP	RLP	FLP	RLP	FLP	RLP	FLP
Delivered Lumens/FT	234	308	404	533	534	705	654	862
Input Watts/FT	4	4	6	6	8	8	11	11
Lumen/Watt	68	89	69	91	67	88	62	82

*CCT (35K)

*Consult factory for customized lumen output and wattage

**Based on calculated values



Declare.

LED Components

Linear: Nichia® - 757 Series LED chips (available in 80 or 90 CRI)

LED Life


Rated 65,000 hours (L80) at 25 °C ambient temperature.

Color Consistency

The Acuity Brands circuit boards for the linear LED components use a precise binning algorithm which creates a consistent color temperature from board to board. Color variation is no greater than a 2.5 Step MacAdam (2.5SDCM) along the black body locus from board to board.

Driver

eldoLED constant current driver options delivers ultra-smooth dimming resolution from 100% to 0.1%, while assuring flicker free, low current inrush, 89% efficiency and low EMI.

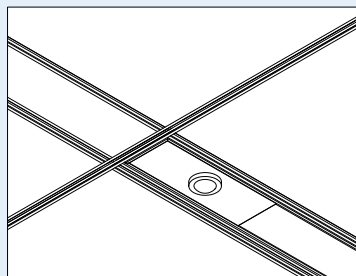

Occupancy Sensor (PDT) and/or Photocell (ADC)

Integrated Controls

Optional nLight® embedded controls make luminaire addressable- allowing it to digitally communicate with other nLight enabled controls such as dimmers, switches, occupancy sensors and photocontrols. Simply connect all the nLight enabled control devices using standard CAT5 Cabling. (Input option: NLIGHT)

Photometry

For photometric information refer to www.marklighting.com.



A+ Capable options indicated
by this color background.

Ordering

Example: SL2L LOP 4FT FLP FL 80CRI 30K 600LMF DARK 277 EC NLIGHT

--	--	--	--	--	--

Series		Linear Length Plan		Total Run Length		Fixture Style		Ceiling Trim		Direct Light Source Color Rendering			
SL2L	Slot 2 LED Linear Recessed	LOP	Linear Optimized Plan	2FT	2'	7FT	7'	RLP ^{1,3}	Regressed Lens	FL ⁴	5/8" Flange(sheetrock)	80CRI	80 CRI
				3FT	3'	8FT	8'	FLP ²	Flush Lens	TG	9/16" or 15/16" Flat or Inverted Tee	90CRI	90 CRI
				4FT	4'	__FT__	*Specify continuous linear feet in 1" increments (7FT6 = 7FT 6IN)	GB ⁴	Trimless (sheetrock)				
				5FT	5'	WFL		Perimeter Mount, 5/8" Flange (Sheetrock)					
				6FT	6'	WTG		9/16" Flat or Inverted Tee, Perimeter Mount					
*For metal pan, hard wood or other ceiling types consult factory.													

*For metal pan, hard wood or other ceiling types consult factory.

--	--	--	--	--	--

Direct LED Color Temp	Direct LED Light Output	Direct Distribution	Minimum Dimming Level	Voltage	Finish	Emergency Options
27K* 2700K 30K 3000K 35K 3500K 40K 4000K 50K* 5000K	400LMF 400 Lumens per FT 600LMF 600 Lumens per FT 800LMF 800 Lumens per FT 1000LMF 1000 Lumens per FT _LMF* ⁹ ## Lumens per FT (Limited to 300LMF to 1000LMF in 50LMF increments)	(blank) Standard Distribution WW ⁵ Wall Wash	NODIM Non - Dim MIN1 Constant current, dimming to 1% DARK Constant current, dimming to 0.1% MIN5 ⁶ Constant current, dimming to 5% MIN10 ¹⁵ Constant current, dimming to 10%	120 120V 277 277V 347 ⁷ 347V	(blank) White, textured xxx/BLKT Black, textured xxx/SLVT Silver, textured xxx/RALTB ⁸ RAL paint finish xxx = fill in with the appropriate ceiling trim. Only trims are painted. RALTB ⁸ is for pricing only. Replace with applicable RAL number and texture when placing order.	(blank) No Emergency _E10WLC ⁸ Number of 4ft Emergency Section(s) with battery pack _EC ¹⁰ # of Emergency Circuits

--	--	--	--	--

Control Input	Primary Sensor ¹²	Secondary Sensor ¹²	Tertiary Zone	Options
(blank) Non-dim ¹¹ ZT 0 10V NLIGHT nLight enabled NLTAIR2 ¹⁷ nLight Air (Wireless Enabled) ECOD ¹⁶ Lutron Hi-Lume digital driver ECOD2 ¹⁶ Lutron Hi-Lume 2-wire (1% dimming) ECOD5 ¹⁶ Lutron 5-series digital driver (5% dimming) DALI ¹⁹ Dali	(blank) Single Zone, No Sensor NS Multi-zone, No Sensor Main Zone PDT ¹³ Dual Technology Occupancy Sensor, PIR and Microphonics Sensor ADC ¹³ Daylight Dimming Sensor API ¹⁴ Passive Infrared Occupancy Sensor and Daylight Dimming Sensor APD ¹⁴ Dual Technology Occupancy Sensor and Daylight Dimming Sensor	(blank) No additional zones/sensors SNS Multi-zone, with no sensor in secondary zone SPDT ¹³ Dual Technology Occupancy Sensor, PIR and Microphonics Sensor SADC ¹³ Daylight Dimming Sensor SAPI ¹⁴ Passive Infrared Occupancy Sensor and Daylight Dimming Sensor SAPD ¹⁴ Dual Technology Occupancy Sensor and Daylight Dimming Sensor	(blank) No additional zones/sensors TNS Multi-zone, with no sensor in tertiary zone	CP ¹⁸ Chicago Plenum USPOM US point of assembly WL ^{3,9} Wet Location Listing DPL Damp Location Listing PWS 6' Pre-Wire, 3/8" Diameter, 18 Gauge

* Requires longer lead time.

Notes

- Supplied with lift and shift lay-in lens.
- Supplied with snap-in lens.
- Wet Location label not available with regressed lens, sensor options or PWS. Cannot be installed on vertical surfaces.
- Not intended for post sheetrock installation.
- Wall wash not available with RLP lens or all sensor options.
- MIN5 requires ECOD5 Control Input. ECOD5 only available with MIN5 dimming.
- Not available with 2ft fixture sections or with E10WLC, NLIGHT, sensors, or ECO options. Must select MIN1 option.
- Default battery pack is integral, battery pack will be remote on 2' & 3' (RE10WLC) if 5' or 6' unit, integral battery pack is only available with ZT or NLTAIR2. Battery will be remote with RLP, WW or sensors. Only 1 integral battery pack per unit. CP listing must have an integral battery. Remote batteries are not wet location listed, they may be used with a wet location fixture is the battery itself is mounted in a dry location.
- Not available with ECOD, ECOD2 and ECOD5.
- Standard 4' EC section, defaults to end of run. 2ft, 3ft and 5ft powers entire fixture, 6ft powers 3ft EC section.
- Only available with NODIM option.
- Sensors not available with WW, NODIM driver, WL, RLP, downlights or 2' or 3' units. Not available with 347 & NLIGHT together. Default location for sensor is the left side of the fixture. For runs, the first fixture will include the sensor.
- Requires ZT or NLIGHT Control Input.
- Requires ZT, NLIGHT or NLTAIR2 Control Input.
- MIN10 not available with 347, sensors, NLIGHT or NLTAIR2, requires ZT
- ECOD and ECOD2 not available with sensors, requires MIN1 dimming. Must use 120 volt for ECOD2.
- Must select MIN1 or DARK. Not available with RLP, WW, PDT, ADC or 347, DPL or WL. If with EC, cannot be on individual units, and on runs, the EC cannot be on the same section as NLTAIR2.
- CP not available with NLTAIR2.
- DALI is only available with DARK or MIN1. It is not available with sensors or downlights.

A+ Capable Luminaire



This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and out-of-the-box control compatibility with simple commissioning.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is part of an A+ Certified solution for nLight® control networks when ordered with drivers marked by a **shaded background***
- This luminaire is part of an A+ Certified solution for nLight control networks, providing advanced control functionality at the luminaire level, when selection includes driver and control options marked by a **shaded background***






To learn more about A+, [visit www.acuitybrands.com/aplus](http://www.acuitybrands.com/aplus).

*See ordering tree for details

Technical Drawing

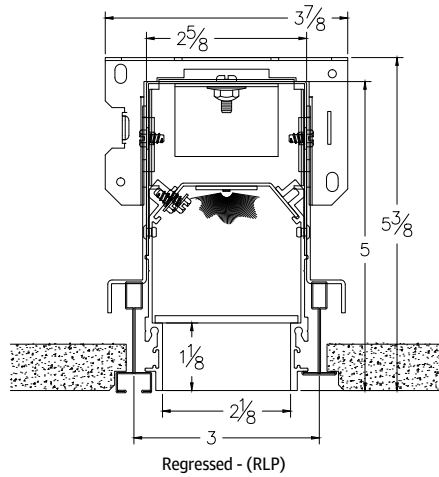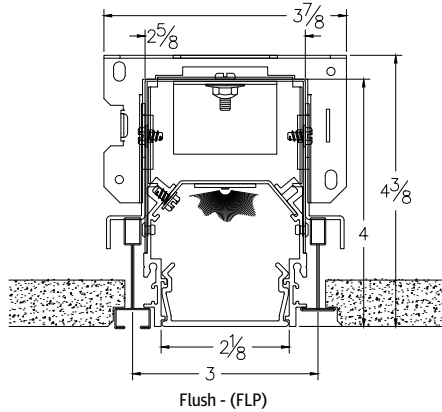


Ceiling Trim



Emergency Battery


Internally Mounted (E10WLCP)

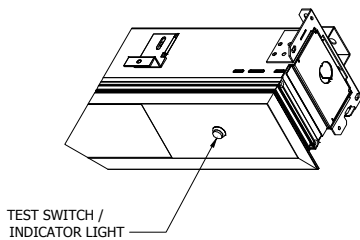

Notes

- Delivers 700 lumens per 4FT length. Default location is the right side of fixture and end of run.
- Provided with 4FT of flexible conduit. Maximum of 25FT remote distance if extended. Extension provided by others.
- See ordering tree notes for remote battery pack scenarios.


Remote Mounted (RE10WLCP)

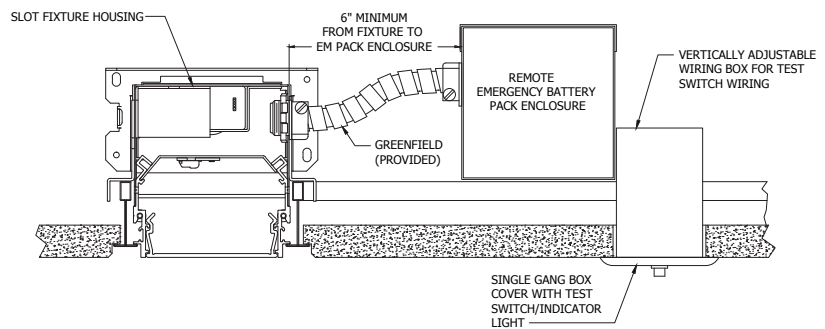

nLight Air Wireless

To Make fixture NLTAIR2 compatible the following components are required:

- 1) rpp20 D
- 2) rPODB 2P DX

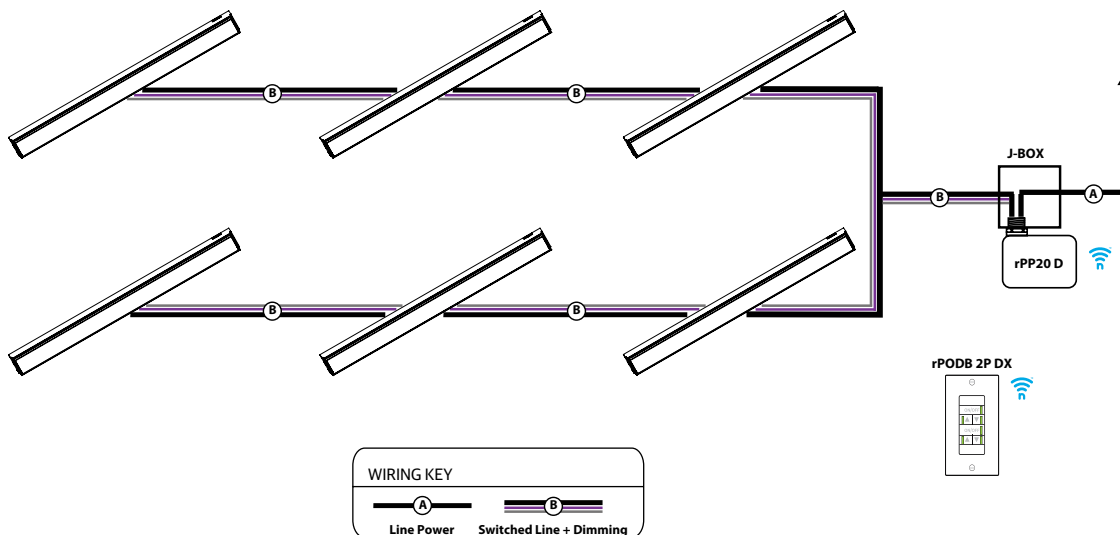


Continuous Runs


Slot 2 LED continuous rows can be configured in 1" increments.

Run Patterns, Corners and Junction


Slot 2 LED patterns be configured in 1' increments with illuminated 90° inside and outside corners, T junctions, and X junctions with standard 2' corner and junction lengths. For custom angles, corner or junction lengths, consult factory.




90° Corner




T Junction



X Junction



Inside Corner



Outside Corner

Layout Sketch

Please draw and configure your linear run below.

MARK


ARCHITECTURAL
LIGHTING™

Slot 2 LED


Recessed Linear

OPTICS

Slot LED's patent-pending, precision lumen DIRECTIR optics condition and refract light to deliver accurately controlled, striation-free, and uniform white light. All lumen DIRECTIR optics are injection-molded, optical grade, UV-resistant acrylic with selective finishing/polishing treatment.

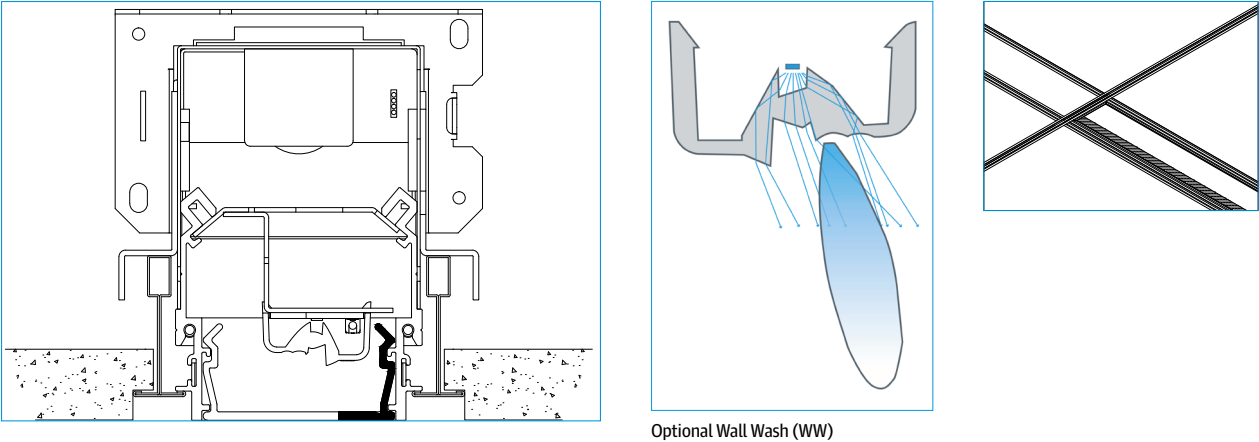

INTEGRATED SENSOR LAYOUT

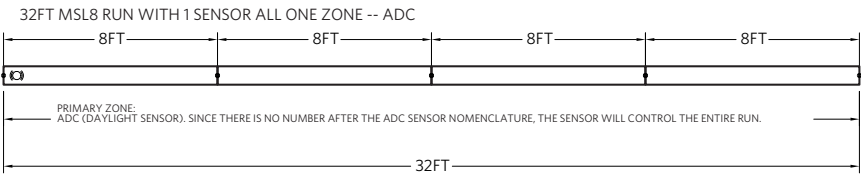

- Notes:
- Only one sensor per zone

OCCUPANCY DETECTION COVERAGE

At the 7.5 ft (2.9 m) hanging height of a typical pendant mount fixture the sensor provides 10 ft (3.05 m) radial detection of small motion. At a 9 ft (2.74 m) hanging height the radius is 12 ft (3.66 m) for small motion.

Adequate for walking motion detection from mounting heights between 7.5 ft (2.29 m) and 20 ft (6.10 m).

Initial detection will occur earlier when walking across sensor's field of view than when walking directly at sensor.

Initial detection of walking motion into long coverage segment will occur at distances of 2x the mounting height up to 15 ft (4.57 m) and 1.75x up to 20 ft (6.10 m). Lens assembly rotates 15° to enable adjustment in order to line up long segments.

