

5. Make wiring connection and ensure connections are insulated. (Figure 3-5)

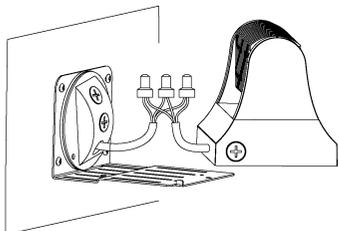


Figure 3-5

6. Push the wires into junction box; adjust viewing angle and tighten screws. (Figure 3-6)





Figure 3-6


**Standard wire:**

L/live wire:Black\Brown; N/neutral wire:White\Blue;  
Ground wire:Green\Yellow-green.


**Note: To meet the requirements of DLC certification, lighting modules must face in the same direction.**

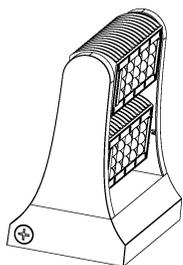

correct use

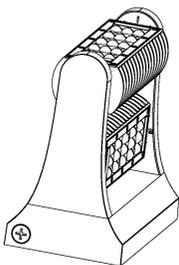

Incorrect use

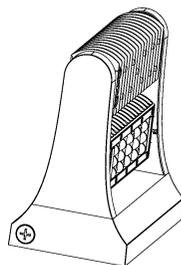

Incorrect use

**Warning/Avertissement :**

MIN 75 °C SUPPLY CONDUCTOR

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

LES FILS D'ALIMENTATION 75 °C MIN  
CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS.

# CSC LED Rotatable Wall Pack Installation Instructions

**Warning :**

1. Do not connect to a generator.
2. Abide by local laws and regulations.
3. Do not install the luminaire in the rain.

**Installation notice :**

1. To avoid possibility of electrical shock or fire, installation personnel must have professional electrical knowledge.
2. Wear gloves before installation in order to avoid injury;
3. If any smoke or spark occurs; please turn off the power immediately and notify relevant personnel.
4. This luminaire is suitable for outdoor use.

**Installation I**

**Wiring from the bottom of luminaire**

1. Cut holes on the wall according to locating plate. (Figure 1-1)

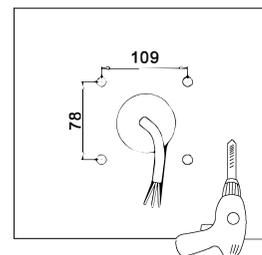


Figure 1-1

2. Fix rubber plugs into holes. (Figure 1-2)

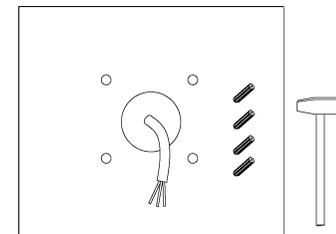


Figure 1-2

3. Align mounting bracket with hole; tighten screws. (Figure 1-3)

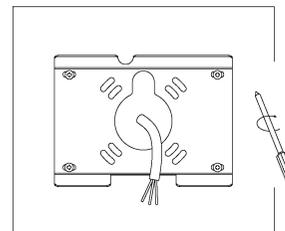


Figure 1-3

4. Make wiring connection and ensure connections are insulated. (Figure 1-4)

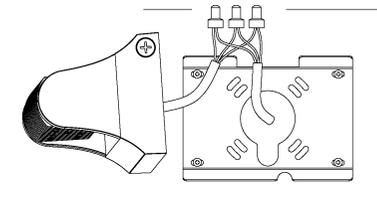


Figure 1-4

5. Fix the luminaire on the bracket and tighten screws on the bottom. (Figure 1-5)

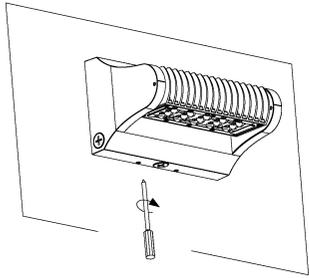


Figure 1-5

6. Adjust viewing angle and tighten screws. (Figure 1-6)

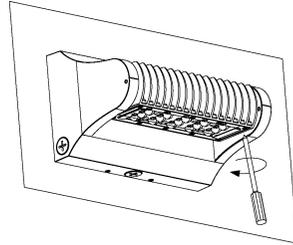


Figure 1-6

5. Tighten the pipe on the luminaire; adjust viewing angle and tighten screws. (Figure 2-5)

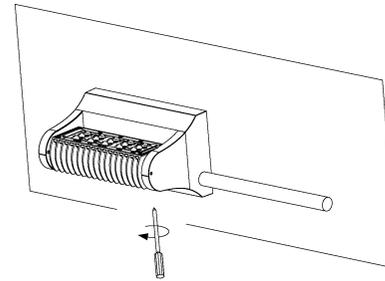


Figure 2-5

### Installation II: Wiring from the side of luminaire

1. Cut holes on the wall according to locating plate. (Figure 2-1)

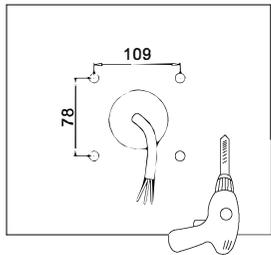


Figure 2-1

2. Fix rubber plugs into holes. (Figure 2-2)

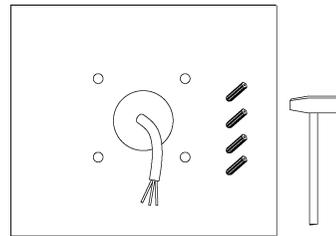


Figure 2-2

3. Align mounting bracket with hole; tighten screws. (Figure 2-3)

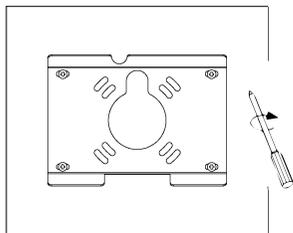


Figure 2-3

4. Fix the luminaire on the bracket; make wiring connection from side ensure connections are insulated. (Figure 2-4)

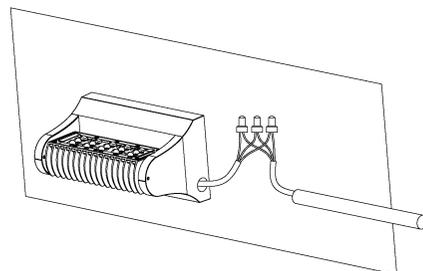


Figure 2-4

### Installation III: Bracket installation

1. Cut holes on the wall according to locating plate. (Figure 3-1)

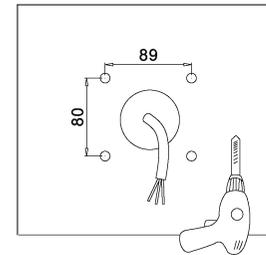


Figure 3-1

2. Fix rubber plugs into holes. (Figure 3-2)

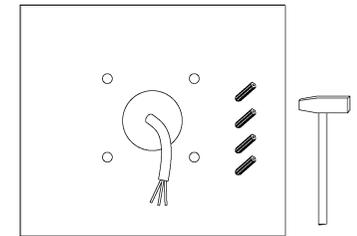


Figure 3-2

3. Align mounting bracket with hole; tighten screws. (Figure 3-3)

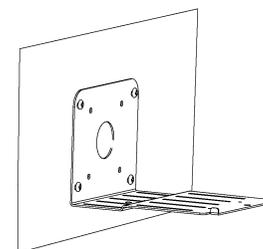


Figure 3-3

4. Pass wires through rubber ring and junction box, align with holes and lock junction box. (Figure 3-4)

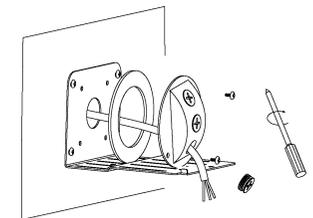


Figure 3-4