



SAFETY INSTRUCTIONS

1. Equipment should be mounted securely in locations and at heights where it will not be readily subjected to tampering by unauthorized personnel. **2.** Do not mount near gas or electric heaters. **3.** Cap unused wires with enclosed wire nuts or other approved method. **4.** Do not use this equipment for anything other than its intended use. **5.** The use of accessory equipment not recommended by the manufacturer will void product listing and warranty and may cause an unsafe condition. **6.** Any service on this equipment should be performed by qualified personnel only. **7.** Make sure wire terminations are secure and leads are properly tucked in appropriate wire channels. **8.** Damaged by corrosion will not be honored as a materials defect claim. It is the user's responsibility to provide suitable protection against corrosive agents such as moisture and condensation and other harmful elements. **9.** Electrical connection should be in a dry area unless adequately sealed. **CONSULT A QUALIFIED ELECTRICIAN BEFORE INSTALLING**



Note:

1. This fixture should not be used in areas with limited ventilation or high ambient temperature exceeding 45°C. **2.** Slipfitter Mounted with PHOTOCELL function elevation angle should not exceed 15 degrees **3.** This product series emits high light output. DO NOT look directly into the light emitting area. Direct exposure to the light over an extended time period may harm eyes **4.** Operating ambient temperature range -40°C to 45°C




Caution:

Disconnect AC power before servicing and installation. All electrical connections must be in accordance with NEC/CEC or your local code.


INSTALLATION STEPS (SQUARE/ROUND POLE)

1. Remove the side plate from mounting bracket. Please skip to step 3 if mounted onto the square pole
2. Attach round pole mounting plate on mounting bracket.
3. Route the cord into mounting bracket through the hole for wiring, slide the fixture onto the bracket and tighten 2 bottom screws.
4. Slightly drag the wires to make sure the hole on bracket is sealed by silicon gasket.
5. Make wiring connection as per wire diagram below, replace the side plate and fasten screws.

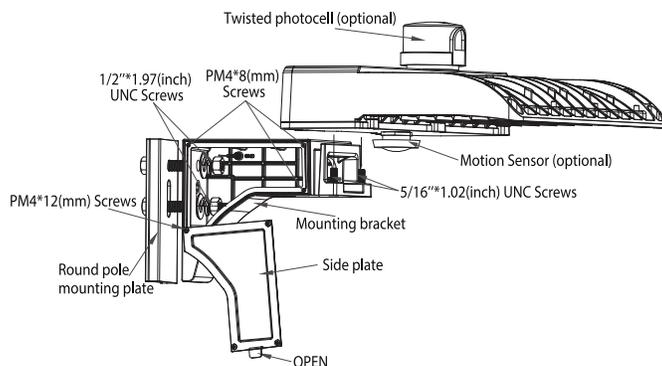


INSTALLATION STEPS (SLIPFITTER)

1. Connect the wires to L / N / GND.
2. Remove the cover and adjust the bracket to the desired angle.
3. Install the bracket on the pole and x it with screws.


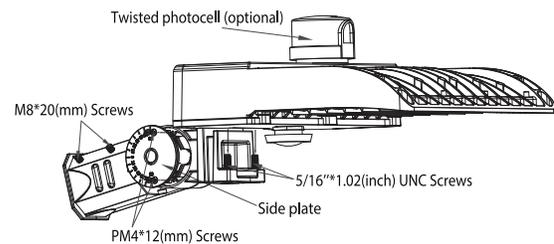


INSTALLATION STEPS (WALL MOUNT)





1. Remove the side plate by loosen the screws.
2. Fix the back plate onto the arm bracket with screws provided.
3. Use the metal template provided to locate footprint on the wall to drill the holes, then x the bracket on the wall with screws.
4. Route the power cord into wall mount bracket, slide the fixture onto the mounting bracket, then tighten bottom screws.
5. Make wiring connection as per wire diagram below, replace the side plate and fasten screws.

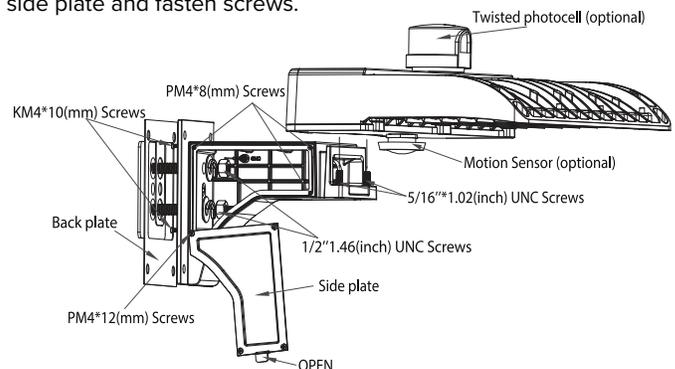

WIRING DIAGRAM

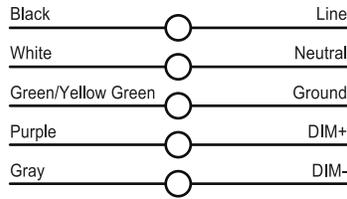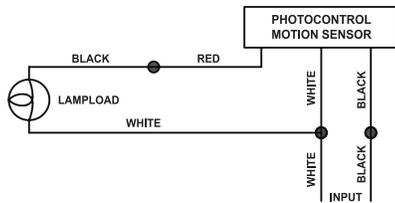

ACCESSORY LIST

Mounting Type	Accessory	Specifications	Quantity
 Slipfitter Mount	Slipfitter	Adjustable slipfitter	1
 Square mount	① Pole Mout Arm	19.9 x 17.7 x 9cm Square pole mount arm	1
	② Bolt	# 1/2" x 1.97" Stainless Steel Hexagon Hexagon head bolt	2
 Round mount	① Pole Mout Arm	19.9 x 17.7 x 9cm Square pole mount arm	1
	② Bolt	# 1/2" x 1.97" Stainless Steel Hexagon Hexagon head bolt	2
	③ Adaptor	17.7 x 8.8 x 1.3cm Round pole adaptor	1
 Wall mount	① Pole Mout Arm	19.9 x 17.7 x 9cm Square pole mount arm	1
	② Wall Mount Plate	20.3 x 15.2 x 0.5cm Steel Plate	1
	③ Wall Mount Template	20.3 x 15.2 x 0.1cm Aluminum alloy plate	1
	④ Bolt	KM4 x 10" Stainless Steel flat head bolt	4
	⑤ Bolt	# 1/2" x 1.46" Stainless Steel Hexagon head bolt	2
Others	Twist-lock photocell	120-277V 3-Pin	1
	Receptacle	3-Pin receptacle	1
	Bolt	PM4 x 8 Stainless Steel, Round Flat bottom Bolt	2
	Occupancy Sensor	120-277V 0-10V Bi-level	1

TEMPLATE

