

WARNING: DISCONNECT POWER AT THE MAIN FUSE BOX BEFORE INSTALLATION.

WARNING:

This fixture is intended for installation in accordance with the National Electrical Code (NEC) and all local code specifications. If you are not familiar with code requirements, installation by a certified electrician is recommended.

Before assembly, remove all parts and part packages from box. If anything is missing, please contact the retailer from which the product was purchased.




ANY QUESTIONS CALL: 800-613-3261
M-F 8:30AM-5:00PM ET


ITEM#: 16287/12

1. Carefully pull house wires out of junction box so they are easily accessible during installation.
2. Position mounting bracket (A) so threaded ends of attached fixture mounting screws (E) are facing down towards floor.
3. Carefully pull house wires through center hole in mounting bracket (A).
4. Align small holes in mounting bracket (A) with holes in junction box.
5. Thread each junction box screw (B) into appropriate hole in mounting bracket (A) and into hole in junction box. Tighten junction box screws (B) to secure mounting bracket (A) to junction box.



CAUTION: Make sure house wires are pulled completely through hole in mounting bracket. **DO NOT** pinch wires between mounting bracket and ceiling.

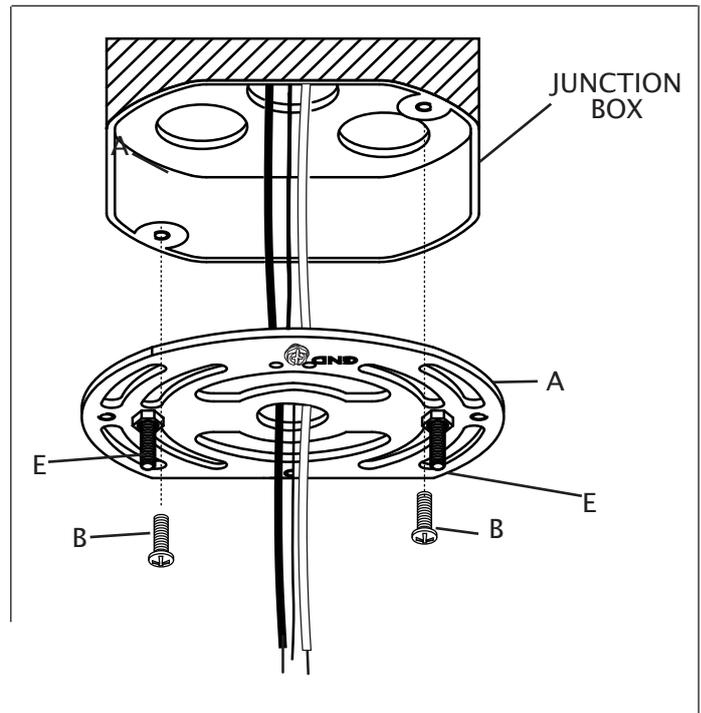

6. Cables (M) on fixture are adjustable.
7. Release fixture wires before adjusting cable length. To release fixture wires, loosen set screw on strain relief (R) on canopy (D) using wrench (W). **DO NOT** completely remove set screw.
8. Determine desired height of fixture. Press cable release button on canopy (D). Move cable up or down to achieve desired height. Repeat this step for each cable. Ensure that each cable is the same length so fixture hangs straight.
9. After positioning cables, carefully pull fixture wires up to remove any slack on fixture wires. Tighten set screw on strain relief (R) to secure fixture wires in place.

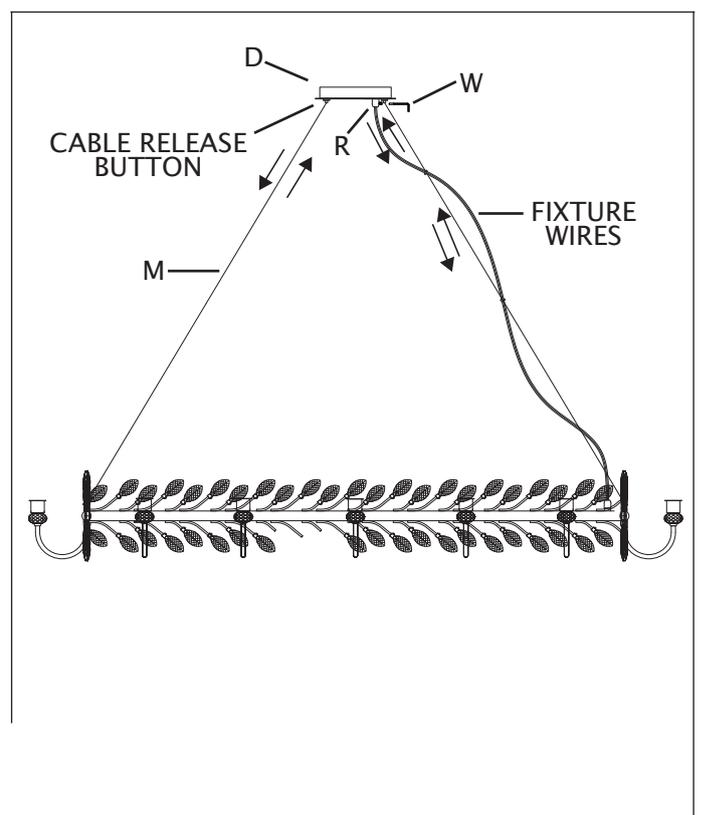


10. Loosen screws on each end of safety cable lock (P). Pull one end of safety cable from hole in safety cable lock (P).
11. Pass safety cable up through hole in side or top of junction box and into ceiling.
12. Wrap safety cable around 2x4 or other appropriate load bearing structure in the ceiling. **CAUTION:** DO NOT connect the safety cable to the junction box, mounting bracket or any other part of the light fixture.
13. Slip end of safety cable back through small hole in cable lock (P). Pull safety cable through hole. Make sure safety cable is securely attached to structure. Tighten second screw on cable lock (P) to secure safety cable.

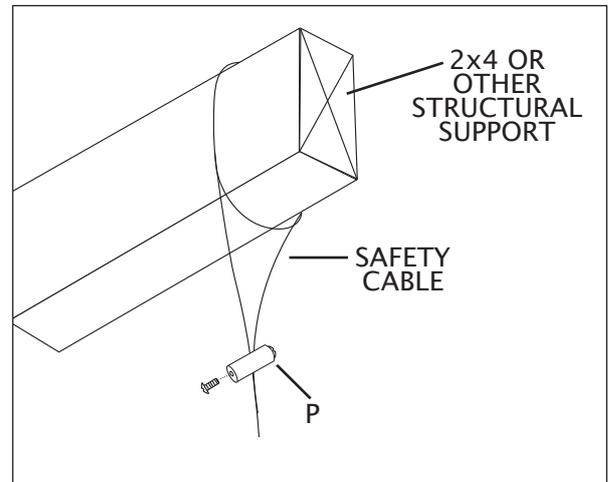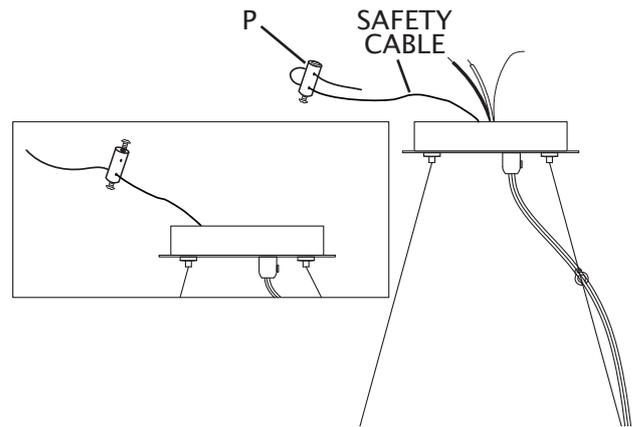

14. Strip 3/4" of insulation from ends of fixture wires.
15. Slightly loosen ground screw on mounting bracket (A). Do not completely remove ground screw. Wrap house ground wire (copper) around ground screw, leaving enough ground wire to attach to fixture ground wire. Twist end of fixture ground wire and end of house ground wire (copper) together. Twist wire nut (C) onto ends of wires. Completely tighten wire nut (C). Reference chart below for correct wire connections.


Connect Supply (House) Ground Copper Wire to:
Bare Copper Wire or,
Bare Silver Wire or,
Green Insulated Wire.

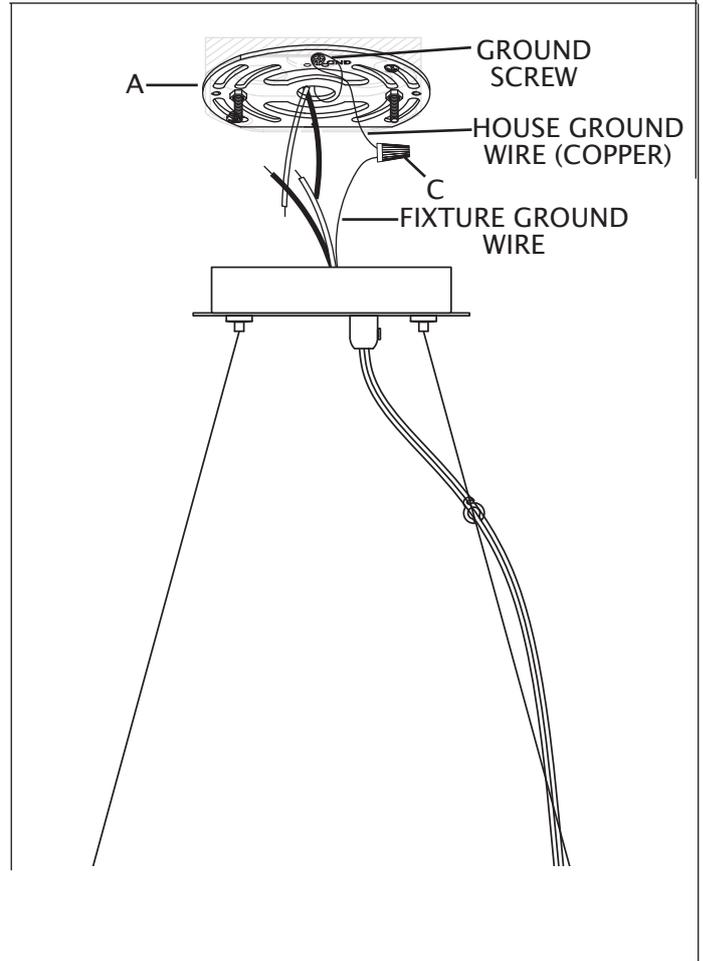

16. Twist end of house lead wire (black) and end of fixture lead wire together. Twist wire nut (C) onto ends of wires. Completely tighten wire nut (C). Twist end of house neutral wire (white) and end of fixture neutral wire together. Twist wire nut (C) onto ends of wires. Completely tighten wire nut (C). Reference chart to the right for correct wire connections.
17. Wrap electrical tape (not included) around wire nuts (C) and wires. Ensure wires are securely fastened into wire nuts.
18. Carefully push all wires and wire nuts into junction box.

Connect Black Lead Supply (House) Wire to:	Connect White Neutral Supply (House) Wire to:
Black Wire or,	White Wire or,
*Parallel Cord (Round and Smooth) or,	*Parallel Cord (Square and Ridged) or,
No printed words on wire insulation or,	Printed words on wire insulation or,
Insulated Wire (other than green) with Copper Conductor.	Insulated Wire (other than green) with Silver Conductor.

*When parallel wire (SPT 1 & SPT 2) is used:
The lead wire is round in shape or smooth.
The neutral wire is square in shape or ridged

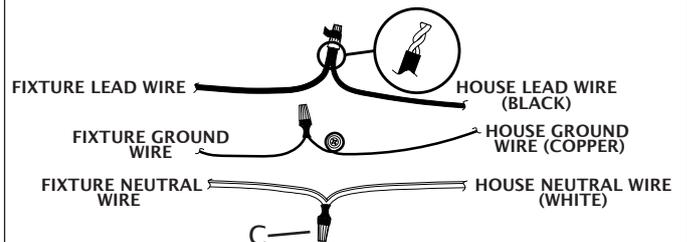

19. Carefully raise fixture up to ceiling. Place canopy (D) of fixture over mounting bracket (A). Pass holes in canopy (D) over ends of fixture mounting screws (E).
20. Screw one threaded cap (F) onto end of one fixture mounting screw (E).
21. Screw second threaded cap (F) onto end of second fixture mounting screw (E). Tighten both threaded caps (F) to secure fixture to ceiling. DO NOT over tighten.
22. Lower shade (K) down over socket. Pass hole in bracket on inside of shade (K) over socket.
23. Thread socket ring (L) onto socket. Tighten socket ring (L) to secure shade (K) in place. DO NOT over tighten.
24. Repeat steps 22 and 23 for remaining shades.
25. Screw recommended bulbs (E12 Edison bulb type, not included) into sockets. Verify correct bulb wattage marked on socket of fixture.
WARNING: DO NOT exceed maximum bulb wattage.
26. To install decorative leaves, loosen set screw on collar of decorative leaf (P) with wrench (W). Slip end of decorative leaf (P) over tip of stem. Tighten set screw with wrench (W) to secure leaf (P) to stem. Repeat this step for remaining leaves.

