



THALASSA ET6024

OUTDOOR PRODUCTS
SCNCE



The Thalassa ET6024 outdoor cylindrical LED fixture was created with a sleek design deliberately, so it could blend in with many different outdoor building styles. The Thalassa also has an impressive efficacy of 79 LPW providing performance as well as elegance in the install environment. With both up-light and downlight this fixture is able to provide the necessary illumination while providing exceptional finesse.

Project: _____

Qty: _____

Notes: _____

OPERATING & ELECTRICAL

Input Voltage 100-277Vac

Power factor 0.9

Dimming 0-10V external dimming down

to 10% (with DMG option)

Total harmonic distortion (THD) <20%

PERFORMANCE

Lumens per Watt 70 LPW at 80CRI

Power consumption 24Wx2

Beam angle See below

MECHANICAL & HOUSING

Housing Aluminum die cast

Lens Highly durable, shatterproof

tempered glass lens ensures high efficiency light output for

a clean, evenly illuminated surface with minimal glare.

Finish

(RAL9006) powder coat finish

Power Supply

driver

LED Board

APPLICATION CONDITION

Ambient temperature range

Protection

COMPATIBLE MOUNTING

Mounting

WARRANTY

System warranty

Lumen maintenance

Rated for 85% initial lumen output at 50,000 hours of operation, operated at 25°C ambient temperature; per guidelines published by the Illuminating Engineering Society (IES). (L85 at 50,000 hours)

Aeralux white, black, gray

Factory wired electronic LED

COB

-25 to 50°C

IP65

Wall mount

5 years

ORDERING GUIDE

EXAMPLE: ET6024-C48-3-1560-80-W-DMG


ET6024	-C48	-3	-1560	-80	-W	-DMG
FIXTURE FAMILY	POWER	CCT	BEAM ANGLE	CRI	FINISH	CONTROLS
ET6024 AERLUX Thalassa ET6024 outdoor scone fixture	-C48 24 watts: 1680 lumens x2 (up-light & downlight)	-3 3000K CCT	-1560 Up 15° and down 60°	-80 80 CRI	-B Black powder coat finish	-DMG 0-10V external dimming down to 10%
		-4 4000K CCT	-8 Up and down 8° (available for C80 only)		-W White powder coat finish	
	-C80 40 watts: 2800 lumens x2 (up-light & downlight)	-5 5000K CCT	-38 Up and down 38° (available for C80 only)		-S Silver (RAL9006) powder coat finish	



Aeralux Incorporation All Rights Reserved. Any information provided is subject to change without notice. All values are typical values when measured under normal laboratory conditions.

DIMENSIONS

EXAMPLE: AE-OD-ET6024

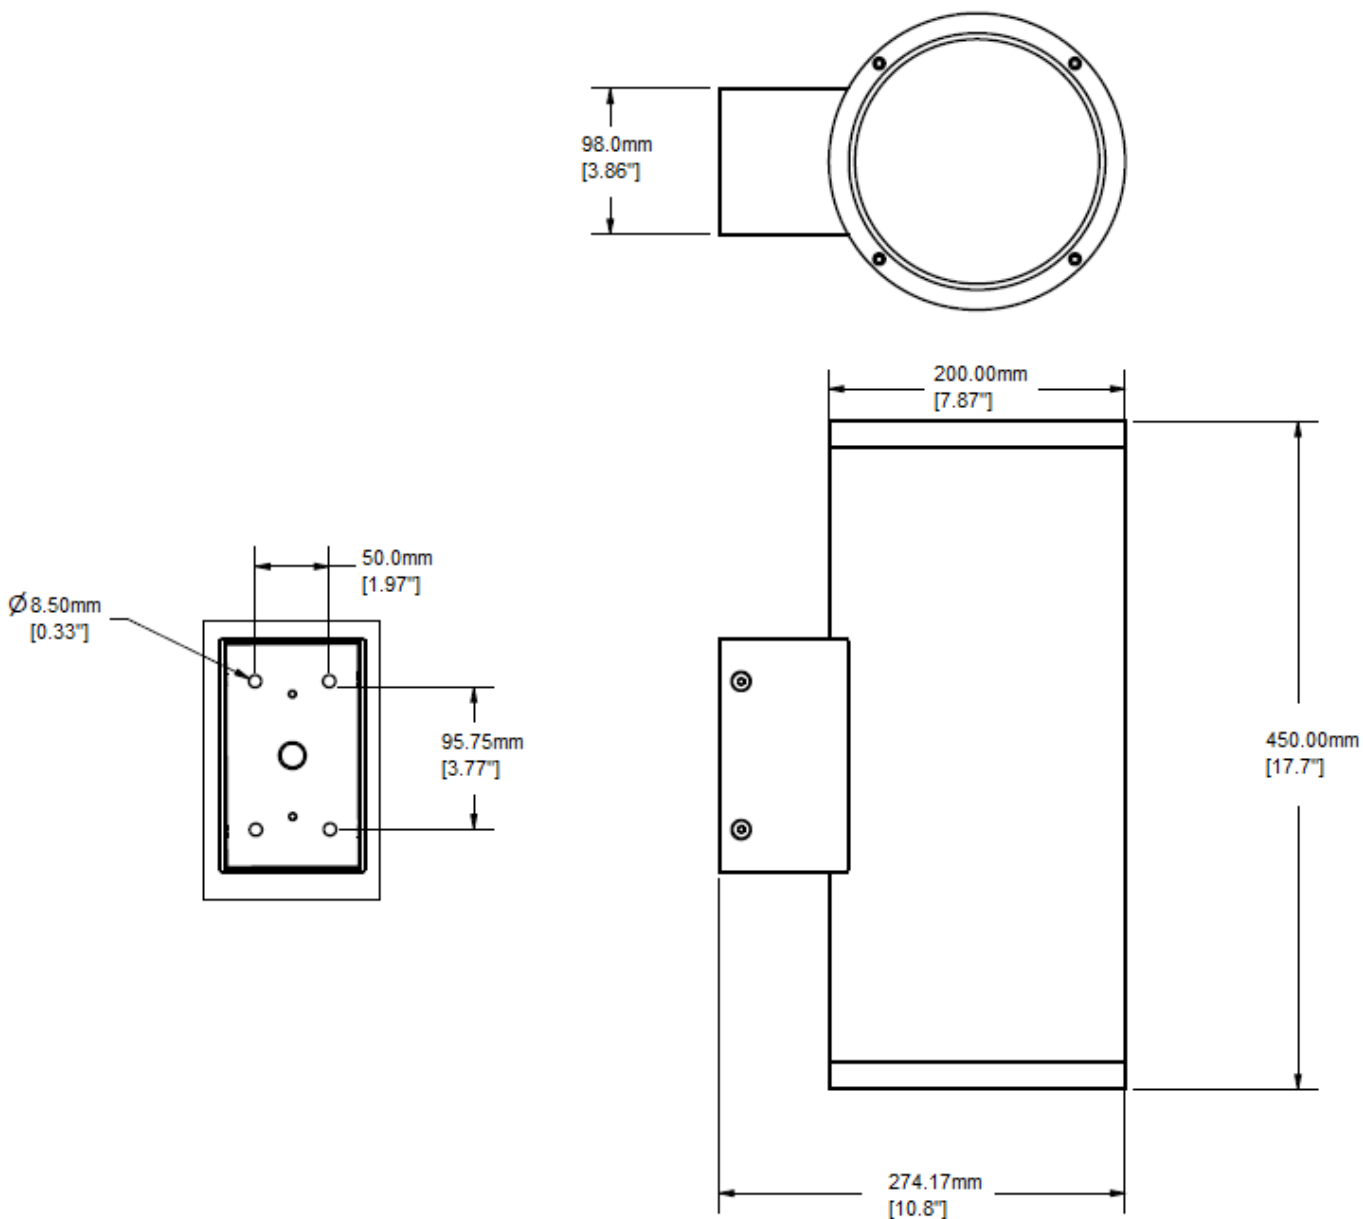



THALASSA ET6024

OUTDOOR PRODUCTS

SCONCE

PHOTOGRAPHS



PREMIUM MATERIALS

Constructed from aluminum die-cast enhancing thermal heat dissipation while providing excellent figure strength.

LIGHT SOURCE

Both up-light and downlight outdoor sconce.

MULTIPLE BEAM ANGLES

Customize your fixture with a unique set of beam angles in the uplight or downlight orientation with the option to having a 20-degree tilt towards the wall.



MULTIPLE FINISH OPTIONS

Select from black, white, or silver powder coat anti-cracking finishes to accent your project space.

CRI

80 CRI provides greater rendering allowing for a more natural light look.

Aeralux Inc.
1111, Dr Frederik-Philips, Suite 202, Montreal, QC H4M 2X6, Canada
514-447-7598 | 1-630-534-2589
www.aeralux.com

Aeralux Incorporation All Rights Reserved. Any information provided is subject to change without notice. All values are typical values when measured under normal laboratory conditions.

aeralux