



GECO SERIES

OUTDOOR PRODUCTS
MFW1G3A2 SIGNAGE LIGHT



The GECO MFW1G3A2 from Aeralux is a compact and low profile LED SIGNAGE LIGHT with a 150 degree beam angle. This enables these modules to be suitable for channel letters with a 1-2 inch depth. These also have great heat dissipation to ensure long life expectancy.

Project: _____

Qty: _____

Notes: _____

OPERATING & ELECTRICAL

Input Voltage	24VDC
Power factor	0.9
Total harmonic distortion (THD)	<20%


PERFORMANCE

Lumens per Watt	164 LPW at 80CRI @4000K
Power consumption	0.3W
Beam angle	150°
Power Supply	Not included

APPLICATION CONDITION

Ambient temperature range	-25 to 60°C
IP Rating	IP65


DIMENSIONS

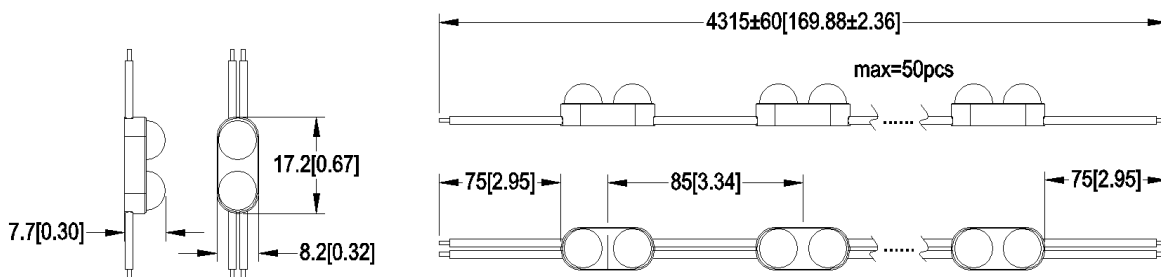

ORDERING GUIDE

MFW1G3A2	-3
FIXTURE FAMILY	CCT
MFW1G3A2 AERALUX compact signage LED 24V DC	-3 3000K CCT
	-4 4000K CCT
	-5 5000K CCT
	-6 6500K CCT

EXAMPLE: MFW1G3A2-3

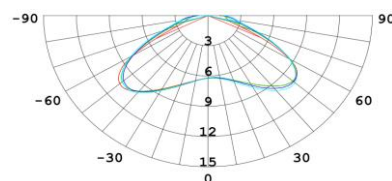

Aeralux Incorporation All Rights Reserved. Any information provided is subject to change without notice. All values are typical values when measured under normal laboratory conditions.