



INSTALLATION INSTRUCTIONS

61501-TRGL

15A TR Duplex Decorator Receptacle
With Guide Light

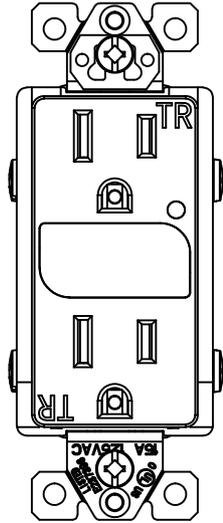

Louvered lens

SPECIFICATIONS

Receptacle Rating.....	15 Amp, 125VAC
Wire Terminals.....	#14-#12 AWG
Operating Temperature.....	-4 to 140°F (-20 to 60°C)
Receptacle Dimension	2-3/4"×1-1/2"×1-5/16"

DESCRIPTION

61501-TRGL outlet adds a guide light to any room without losing an outlet. A daylight sensor automatically controls the guide light and turn on when a room becomes dark. It is ideal for bathrooms, bedrooms, hallways and more.

FEATURES

- 15A Duplex Receptacles
- Guide Light with Daylight sensor
- Replaces a standard duplex receptacle
- This device is designed for easy installation with the Push-In terminal from the back or clamp-type terminals from the side
- An optional jalousie lens is included for added light-level angled control and installs in seconds
- Lamp life rated 50,000 hours
- Interchangeable face covers and lens options
- 2011 NEC Code compliant Tamper-Resistant Shutters
- UL Listed

WARNING

Turn the POWER OFF at the circuit breaker before installing the receptacle.



Read and understand these instructions before installing. This device is intended for installation in accordance with the National Electric Code and local regulations. It is recommended that a qualified electrician performs this installation. Make sure to turn off the circuit breaker or fuse(s) and make sure power is off before wiring the device.

Use copper wire only.


This guide light receptacle **CANNOT** be used if the outlet you are replacing has the top or bottom outlet controlled by separate switch.

WIRING DIRECTIONS: CLAMP-TYPE TERMINAL

- Insert the BLACK (LINE) wire into HOT terminal (With brass screw)
- Insert the WHITE (NEUTRAL) wire into the NEUTRAL terminal (Silver screw)
- Insert the GREEN/BARE (COPPER) wire into the GR terminal (Green screw)

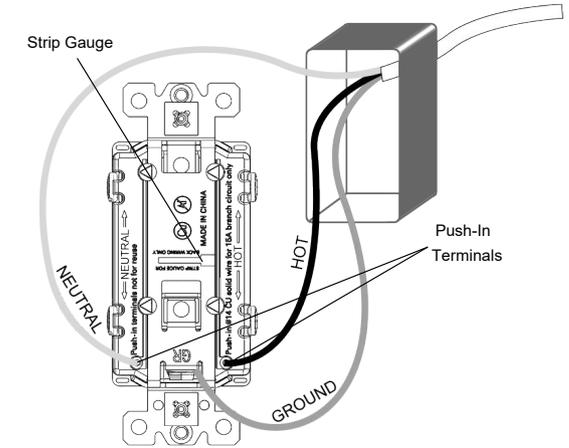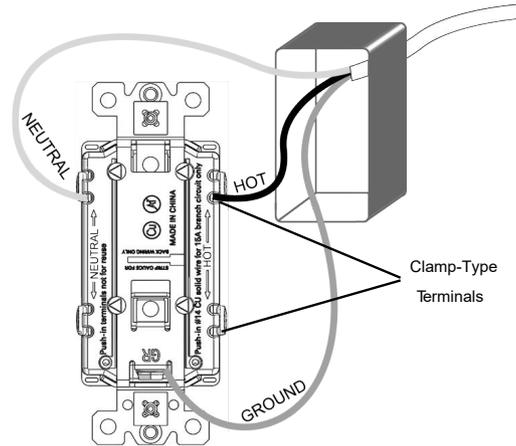

CHANGE FACE COVER and LENS

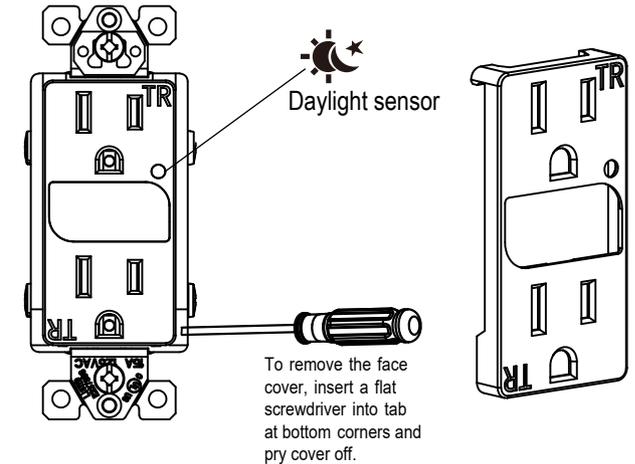

To remove the face cover, insert a flat screwdriver into tab at bottom corners and pry cover off.

WIRING DIRECTIONS: PUSH-IN METHOD (BACKWIRE)

To wire device from push-in terminal (Backwire method):

- Use #14 AWG wires ONLY
- Terminals: reusable by pressing the "push to release" contacts
- Strip wires to size indicated on gauge located on the back of the device
- Insert the BLACK (LINE) wire into HOT terminal hole
- Insert the WHITE (NEUTRAL) wire into the NEUTRAL terminal (Silver screw)
- Insert the GREEN/BARE (COPPER) wire into the GROUND terminal (Green screw)

WARRANTY INFORMATION

This device is warranted to be free of material and workmanship defects for 2 years from the date of purchase. Original receipt or proof of purchase from an authorized retailer must be presented upon warranty claim. ALL claims must be verified and approved by Enerlites, Inc. Warranties from other Enerlites products may vary. This warranty is nontransferable and does not cover normal wear and tear or any malfunction, failure, or defect resulting from misuse, abuse, neglect, alteration, modification, or improper installation. To the fullest extent permitted by the applicable state law, Enerlites shall not be liable to the purchaser or end user customer of Enerlites products for direct, indirect, incidental, or consequential damages even if Enerlites has been advised of the possibility of such damages. Enerlites' total liability under this or any other warranty, express or implied, is limited to repair, replacement or refund. Repair, replacement or refund are the sole and exclusive remedies for breach of warranty or any other legal theory.

