


Enerlites®

POWER PACK

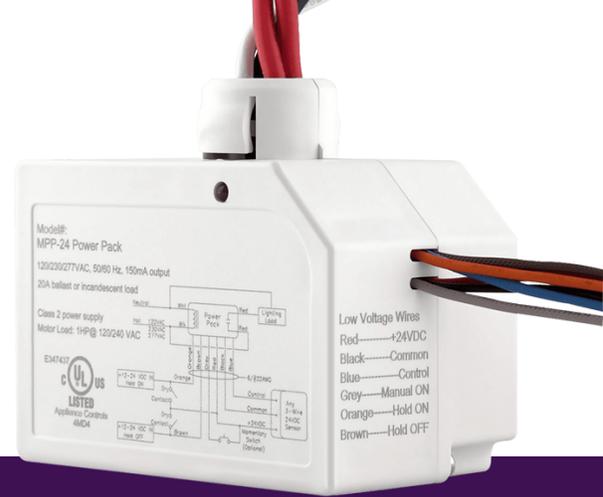

MODEL NO: MPP-24

DESCRIPTION

The ENERLITES MPP-24 power pack is the foundation for any low voltage lighting control system. It supplies low voltage power to occupancy sensors and other control devices, switching line voltage in response to signals from control devices. The power pack is attached to existing junction boxes or mounted into fixture wiring trays. Low voltage wiring should use at least 22-gauge wire. High voltage connections should use at least 14-gauge. This power pack can supply power to 6 ceiling mounted sensors.

FEATURES

- Self-contained power supply relay system
- LED indicator of relay operation for easy verification
- Integrates with low-voltage momentary switch to control any 24VDC occupancy sensor
- Able to link up to six sensors at a time

SPECIFICATIONS

Input Voltage	120 / 230 / 240 / 277VAC, 50/60Hz
Ballast	20A
Tungsten	15A @ 120 VAC, 5A @ 240 VAC
Motor	1 HP
Output	150mA @ 24 VDC
Warranty	2 Years

TESTING & CODE COMPLIANCE



APPLICATIONS

- Offices
- Classrooms
- Meeting Rooms
- Warehouses

SPECIFICATION SUBMITTAL

Job Name

Job Number

Notes