

STATIC WHITE COB PIXEL TAPE LIGHT

24V DC High Output Dynamic Static White

Digital pixel COB tape light allows for individually addressable sections, enabling independent control of LED “pixels” spaced 1.31” apart. Featuring a seamless COB design, create endless effects including chasing, popcorning, waves, and strobe with easy to use SPI control protocol.

- Seamless COB design that eliminates virtually all LED dotting
- Dynamic, Pixel-based Static White at 3000K CCT
- Create millions of different effects and lighting styles
- Upt to 280 lumen per foot output performance
- Cuttable every 3.94” with 16.4ft max run
- Control via DMX (requires SPI decoder)
- cULus Listed for indoor dry and damp locations
- 50,000 hours rated life



PROJECT:

TYPE:


LOCATION:

CATALOG NUMBER:



HTL-COB-PXL30K SERIES QUICK SPECS	
VOLTAGE	24V DC
WATTAGE	3.04W / ft
CCT OPTIONS	3000K
CRI	90
LUMENS	Up to 280Lm / ft
MAX RUN	16.4ft (5M)
CUTTING POINTS	3.94" (100mm)
IP RATING	IP54
PROTOCOL	SPI WS2814
RESOLUTION	1.31"
DIMENSIONS	0.35" (9mm) W x 0.08" (2mm) H
BEAM ANGLE	120°
OPERATING TEMP	-20°C (-4°F) to 40°C (104°F)
CERTIFICATIONS	cULus Listed - dry and damp locations
RATED LIFE	50,000 Hours

HTL-COB-PXL30K SERIES IP RATINGS



IP54 (Coated)
Features a light nano-coating applied to the tape light and LED's that protects from moisture and dust.
Best suited: Indoor dry & damp locations

HTL-COB-PXL30K SERIES QUICK LOOK


1.31" Pixel Resolution

COB Design

Cuttable every 3.94"

IP54 Coated

9mm (0.35") Width
2mm (0.08") Height



16.4ft Max Run


HTL-COB-PXL30K SERIES ORDERING INFORMATION

ITEM NUMBER	VOLTAGE	CCT	LENGTH	PROTOCOL	LUMENS	WATTAGE / FT	IP RATING	CRI	CUTTING	MAX RUN
HTL-COB-PXL30K-16	24V DC	3000K	16.4 ft	SPI WS2814	Up to 280Lm / ft	4.87W / ft	IP54	90	3.94" (100mm)	16.4ft

Includes: Attached 6ft lead wires

HTL-COB-PXL30K SERIES ACCESSORIES

ITEM NUMBER	DESCRIPTION
WIRE-15-5PIN	15ft (20/5) Wire Spool
WIRE-CMP-100-6PIN	100ft (16/6) In-wall Rated Wire Spool
RCWY-PVC-1M	1m Plastic Wire Cover Raceway



WIRE-15-5PIN




WIRE-CMP-100-6PIN



RCWY-PVC-1M

HTL-COB-PXL30K SERIES DMX+SPI QUICK SET-UP

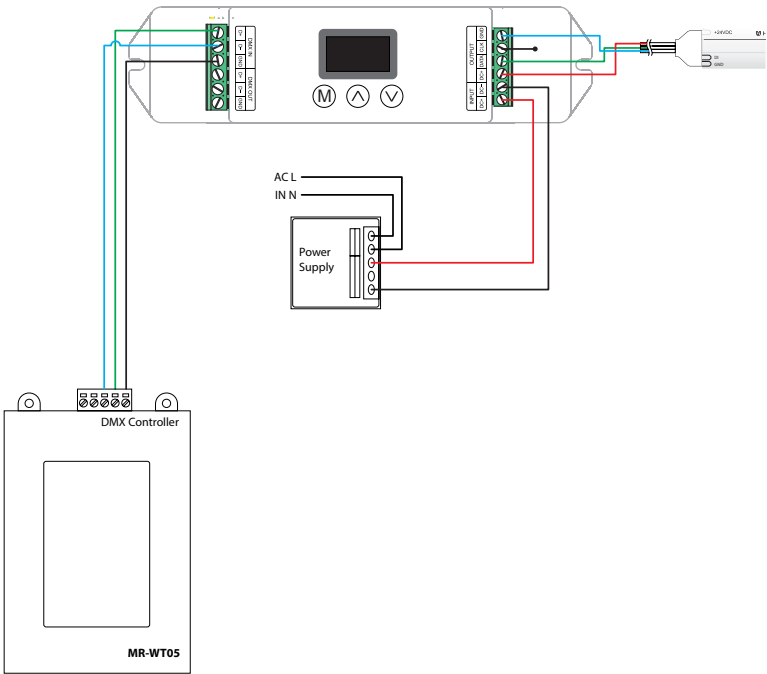

1. Because of the pixel-based design of the HTL-COB-PXLRGBW tape light, an SPI Decoder and DMX Controller are needed.
2. Start by wiring the COB tape light to the "Output" section of the SPI Decoder:
 - Connect the "+24VDC" Input on the COB tape light (RED) to the "DC+" Output on the SPI Decoder.
 - Connect the "DI" Input on the COB tape light (GREEN) to "DATA" output on the SPI Decoder.
 - Connect the "GND" Input on the COB tape light (BLUE) to the "GND" output on the SPI Decoder.
3. Next, wire the Power Supply to the SPI Decoder: (Recommended Power Supplies below)
 - Connect "DC+" Output on Power Supply (RED) to the "DC+" Input on the SPI Decoder.
 - Connect the "DC-" Output on Power Supply (BLACK) to the "DC-" Input on the SPI Decoder.
4. Finally, wire the DMX Controller to "DMX IN" section of the SPI Decoder:
 - Connect "Data +" Output on the DMX Controller (GREEN) to the "D+" Input on the SPI Decoder.
 - Connect "Data -" Output on the DMX Controller (BLUE) to the "D-" Input on the SPI Decoder
 - Connect the "GND" Output on the DMX Controller (BLACK) to the "GND" Input on the SPI Decoder.

RECOMMENDED POWER SUPPLIES

ITEM NUMBER	DESCRIPTION	MAX / MIN LOAD	INPUT VOLTAGE	OUTPUT VOLTAGE	DIMMABLE	DIMENSIONS
ADPT-DRJ-30-24	Adaptive Series 30W	30W / 3W	100-277V AC	24V DC	Yes*	6.49"L x 3.6"W x 1.02"H
ADPT-DRJ-60-24	Adaptive Series 60W	60W / 6W	100-277V AC	24V DC	Yes*	7.4"L x 3.6"W x 1.02"H
ADPT-DRJ-96-24	Adaptive Series 96W	96W / 9.6W	100-277V AC	24V DC	Yes*	8.66"L x 3.6"W x 1.61"H
ADPT-DRJ-192-24	Adaptive Series 192W (2 x 96W)	192W / 19.2W	100-277V AC	24V DC	Yes*	10.94"L x 4.25"W x 1.8"H
ADPT-DRJ-288-24	Adaptive Series 288W (3 x 96W)	288W / 28.8W	100-277V AC	24V DC	Yes*	11.85"L x 4.25"W x 1.8"H

Phase Dimming Compatible With Most MLV, ELV, and TRIAC Dimmers



AMERICAN LIGHTING WARRANTY

LIMITED WARRANTY FOR LED PRODUCTS: 5 YEARS

LIMITED PRODUCT WARRANTY

Our products are warranted to be free from defects in material and workmanship for the warranty period listed. Warranty periods begin from the date of shipment from American Lighting Inc's warehouse to the original purchaser. Products that prove to be defective during their specific warranty period will be either repaired or replaced, at the sole discretion of American Lighting Inc. Claims for defective products must be submitted in writing to American Lighting Inc's RGA Department within the warranty period. Upon approval of such return, American Lighting Inc reserves the right to inspect the product for misuse or abuse. Claims for indirect or consequential damages or for product that, in American Lighting Inc's opinion, has been misused will be denied. This is a warranty of product reliability only and not a warranty of merchantability or fitness for a particular purpose. American Lighting Inc shall have no liability whatsoever in any event for payment of incidental or consequential damages, including, without limitations, installation costs and/or damages for personal injury and/or property. These products may represent a possible shock or fire hazard if improperly installed or altered in any way. This warranty does not apply to any product that has not been properly installed in accordance with current local codes and/or the National Electrical Code. Products that require a transformer, driver, or power supply must be used in conjunction with American Lighting Inc's recommended power supply to ensure safety and retain product warranty.

PRODUCT SPECIFICATIONS

For the latest product information, updates, instructions and details concerning specifications, colors, finishes, performance, installation and design, visit www.americanlighting.com. Color may vary from the color printed herein due to limitations in photographic and printing processes. American Lighting Inc. reserves the right to change product specifications without notice. Other product specifications such as color temperature, wavelength characteristics and lumen output are subject to production limitations and may vary.

LED technology is changing rapidly, and not all color temperatures and performance levels can be duplicated at a later time. Best practices include purchasing 10-15% more for a particular project on the same initial order where white LED color temperatures must be maintained over project and product life. Eventual product replacement should be considered at layout and design stages. Best practices also include testing connections and product performance prior to mounting and/or installing.

AVERAGE LIFE

Average incandescent lamp life, rated life and average life are terms used to describe the number of hours at which half of the lamps have failed. For LEDs, the hours of rated life specify the point where 70% of original lumen output is reached. Below this point, the effective life is over; however, the LED may still emit light. Individual results may vary with actual environmental conditions including, but not limited to, proper installation, ambient temperature and/or input voltage fluctuations.