



ELLIOTT ELECTRIC SUPPLY

We Deliver...Lower Cost, Quality Products, & Personal Service

3804 South Street
75964-7263, TX Nacogdoches
Phone: 936-569-7941
Fax: 936-560-4685

AYCL153PHIV 1P/3W CFL/Led Dimmer Ivory

Lutron



Catalog Number	AYCL153PHIV
Manufacturer	Lutron
Description	Ariadni C•L Dimmer, CFL/Led (Screw-Based), Incandescent/Halogen, 3-Way/Single-Pole, 150W CFL/Led or 600W Inc/Hal Clamshell Packaging In Ivory
Weight per unit	N/A
Product Category	Lighting Dimmers
actuator	Toggle Switch
Brand	Lutron
Category Description	DIMMERS
Description	1P/3W CFL/LED DIMMER IVORY
Documents	Yes
environmental conditions	Indoor use only
Frequency Rating	60
Long Description	Ariadni C•L Dimmer, CFL/LED (Screw-based), Incandescent/Halogen, 3-way/single-pole, 150W CFL/LED or 600W inc/hal clamshell packaging in ivory
Manufacturers Part Number	AYCL-153PH-IV
Mounting	WALLBOX
Operating Temperature	0-40°C
Picture	Yes
Product Type	Ariadni CFL/Led Dimmer Ivory Clam
Size	117mm x 73mm
special features	On / off toggle switch with a captive linear-slide dimmer for a traditional wallplate opening
standard	UL1472 CSA C22.2 184.6
sub brand	Ariadni
Type	C•L Dimmer
Voltage Rating	120
Wattage	150/600

Ariadni® C•L® Dimmer

Dimmer for CFL, LED, Halogen, and Incandescent dimmable bulbs.

Features

- On/off toggle switch with a captive linear-slide dimmer for a traditional wallplate opening
- HED™ Technology: Advanced Lutron® dimming circuitry designed for compatibility with most high efficacy light bulbs
- UL® Listed to control:
 - Dimmable compact fluorescent load (CFL) with integrated ballast
 - Dimmable LED with integrated driver
 - Halogen
 - Incandescent
- Low-end adjustment to accommodate a wide range of bulbs
- 100% factory tested

Application Requirements


- ***When dimming CFLs or LEDs, only bulbs marked or rated as DIMMABLE may be used.***
- For a complete list of compatible DIMMABLE CFLs and LEDs please visit www.lutron.com/dimcflled. For questions call 1.800.523.9466.
- Some DIMMABLE CFLs and LEDs require a minimum number of bulbs for proper operation. For details and a list of bulbs, please visit www.lutron.com/dimcflled.

Model Numbers

AYCL-153P-XX¹ Single pole/3-way²

¹ "XX" in the model number represents color/finish code; see **"Colors and Finishes"** chart on next page.

² For 3-way and 4-way switching, use Claro® switches or other mechanical switches.

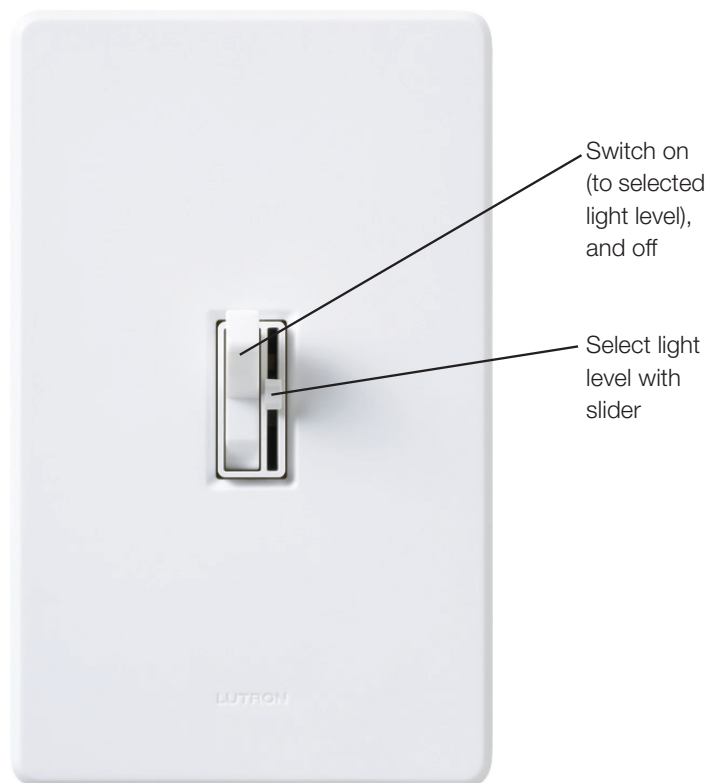

* Wallplate sold separately

Job Name:	Model Numbers:
Job Number:	

Specifications

Regulatory Approvals

- UL® Listed to US and Canadian safety requirements
UL1472 / CSA C22.2 184.1
- NOM

Power and Ratings

- 120 V~ 60 Hz
- 150 W dimmable CFL/LED
- or**
- 600 W Incandescent/Halogen
- or**
- Mixed bulb type per **Multigang and Mixed Bulb Type Ratings** table (see page 3)

Environment

- For indoor use only.
- Operating temperatures 0 °C to 40 °C (32 °F to 104 °F).


Performance

- Power-failure memory
- Captive linear slider
- Electrostatic discharge tested
- Precise color matching
- Mechanical air-gap switch to disconnect load power

Warranty

- 1 Year Limited Warranty
- For additional Warranty information, please visit
http://www.lutron.com/TechnicalDocumentLibrary/369-119_Wallbox_Warranty.pdf

Dimensions

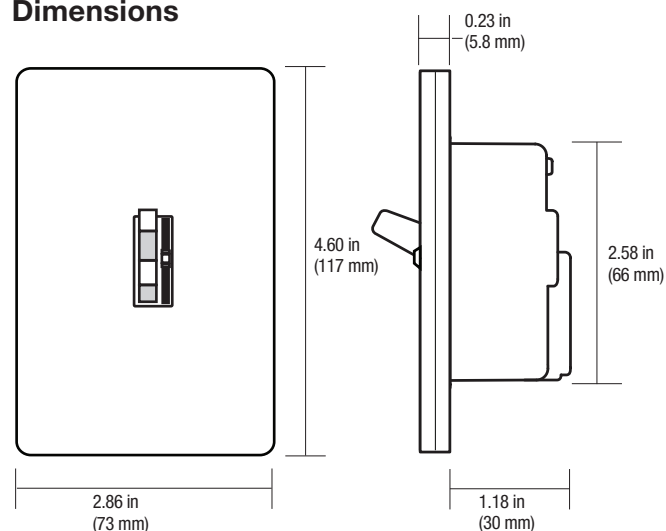

Colors and Finishes

Gloss Finishes

Add color/finish code to model #

Example: AYCL-153P-WH

WH	White
IV	Ivory
AL	Almond
LA	Light Almond
BR	Brown
BL	Black


Job Name:	Model Numbers:
Job Number:	

Multigang and Mixed-Bulb-Type Ratings

When installing more than one Dimmer in the same wallbox, it may be necessary to remove some side sections prior to wiring (**see diagram**). Removal of Dimmer side sections may reduce maximum wattage, as shown in the chart below.

Mixing bulb types (**using a combination of CFL/LED, and Incandescent/Halogen bulbs**) will also affect the maximum ratings, as shown in the chart below.


*EXAMPLE: If one set of side sections is removed and you have two 24 W CFL bulbs installed (Total CFL Wattage = 48 W), you may add up to 300 W of incandescent or halogen lighting.

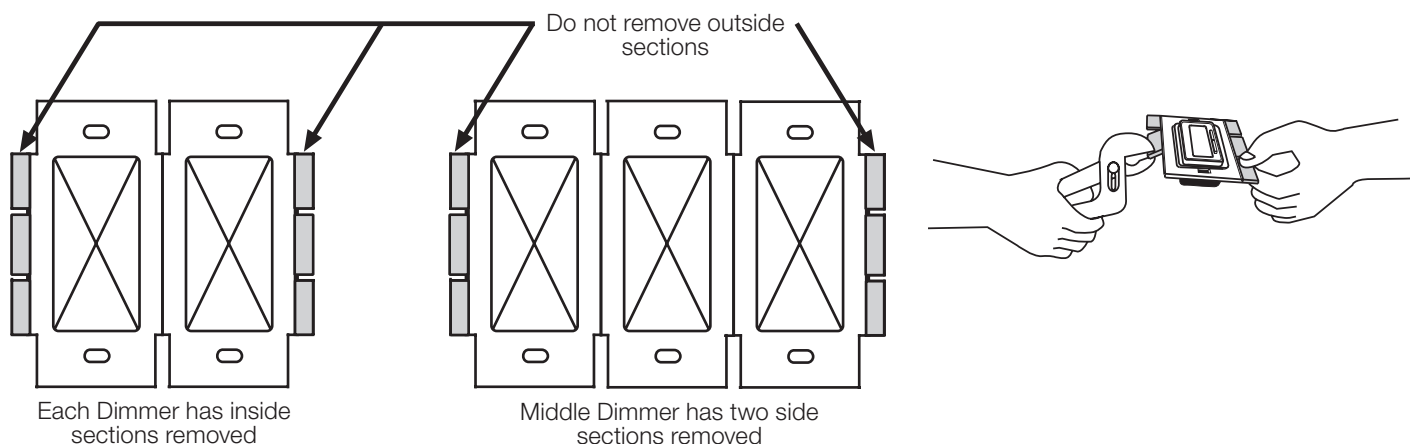

Total CFL/LED Wattage Installed (Wattage per bulb x # of bulbs)	CFL LED	Maximum Allowable Incandescent/Halogen Wattage		
		No sides removed	1 side removed	2 sides removed
0 W	+	600 W	500 W	400 W
1 W – 25 W	+	500 W	400 W	300 W
26 W – 50 W	+	400 W	300 W	200 W
51 W – 75 W	+	300 W	200 W	100 W
76 W – 100 W	+	200 W	100 W	50 W
101 W – 125 W	+	100 W	50 W	0 W
126 W – 150 W	+	0 W	0 W	0 W

Job Name:	Model Numbers:
Job Number:	

Operation (View with wallplate removed)



1 Switch

Turns lights ON and OFF.

2 Slider

Controls light level.

+ **Up**
Increases light level

- **Down**
Decreases light level

IMPORTANT: Set slider to bottom before adjusting dimming range.

Lever-type Adjustment Dial

3 Adjustment lever

Sets low end dimming limit.

Right (clockwise)
Increases brightness



Left (counter-clockwise)
Decreases brightness


OR

Wheel-type Adjustment Dial

3 Adjustment dial

Sets low end dimming limit.

Right (counter-clockwise)
Decreases brightness




Left (clockwise)
Increases brightness


Job Name:	Model Numbers:
Job Number:	

Wiring Diagrams


Single-Pole Wiring

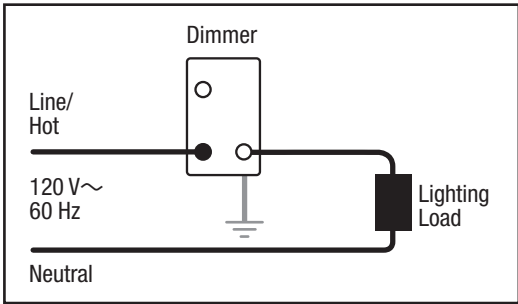

3-Way Wiring

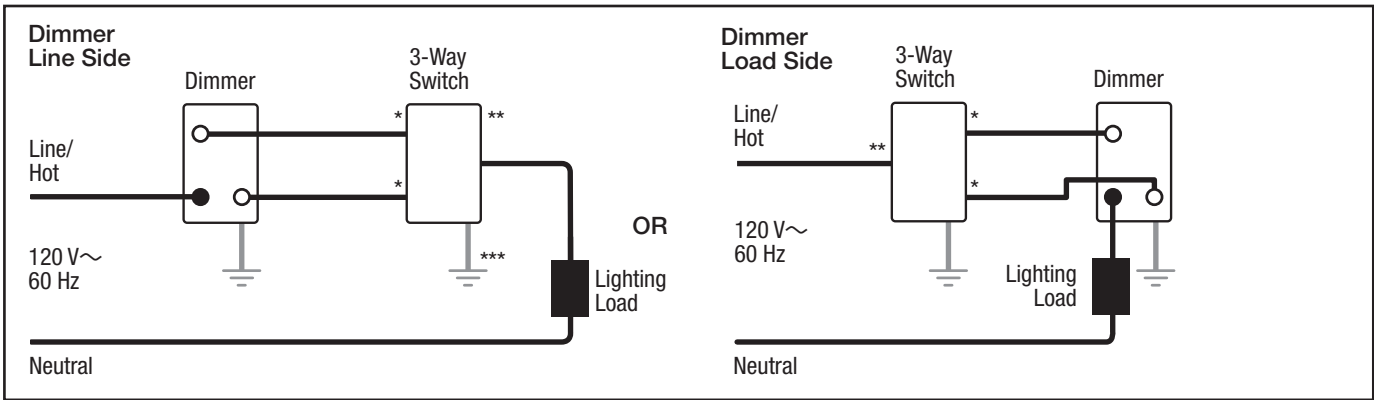

4-Way Wiring

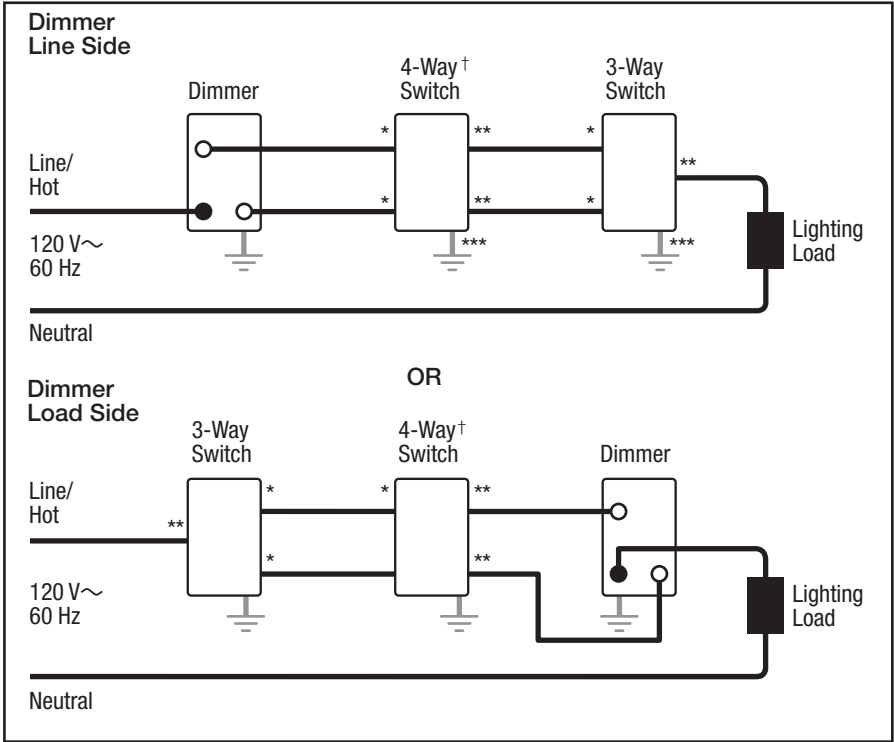

- * or Copper/Black screw terminal
- ** or Brass/Gold screw terminal
- *** or Green screw terminal
- † Please refer to switch instruction sheet for proper wiring.

Note for 4-Way Wiring:
Dimmer must be installed Line Side or Load Side. It cannot be installed in the 4-way location.