

## Features

- Ready to install 24V DC kit with plug and play connection
- Features handheld remote for easy on/off operation with built-in presets
- RGB + Warm White color with 90+ CRI
- Up to 240lm per foot consuming only 4.4W per foot
- Tape light is cuttable every 6.56in (167mm)
- Each tape light kit has a maximum run of 16.4 feet
- Additional tape light accessories included for easy installation
- cULus Listed (Dry Location)

## Available CCT



RGBW

## Control Options

- RGB Controls
  - Requires Adaptive Driver + Receiver
- DMX Controls
  - Requires Adaptive Driver + DMX Receiver
- Auxiliary DMX Controls
  - Requires Adaptive Driver + DMX Receiver
- RGB In-line Controller

## Listing / Ratings




## TRULUX™ High Output RGBW KIT

Trulux™ RGBW tape light kits offer a complete lighting solution with easy to use components that quickly snap together. Alternating 3-in-1 LEDs with 3000K warm white LEDs provide a dynamic color range that extends beyond traditional RGB. RGBW lighting combines RGB with white color mixing to create millions of color possibilities while maintaining even greater brightness and overall color saturation.

## Technical Information

Series	HTL-RGBW Kit
Input Voltage	24V DC
CCT	RGBW
CRI	90+
Wattage	Up to 4.4W per foot
Lumens	Up to 240lm per foot
Max Run	16.4ft
Cuttable	Every 6.56in (167mm)
IP Rating	IP54 - Unjacketed
Dimmable	5-100%
Rating	cULus Listed
Rated Life	50,000 hrs

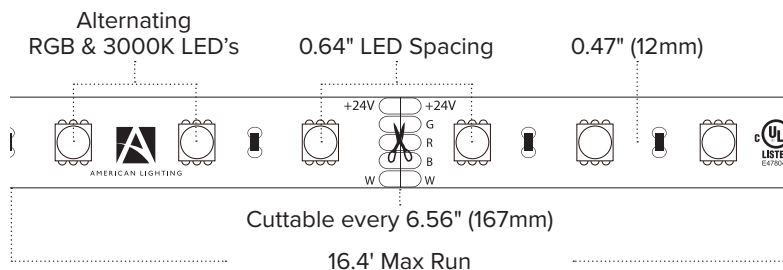



SPEKTRUM+

TRULUX LIGHTING SYSTEMS  
HIGH OUTPUT RGBW  
TAPE LIGHT

TASK LIGHTING

DOWNLIGHTING

LINEAR LIGHTING

ARCHITECTURAL LIGHTING

POWER SUPPLIES




## RGBW SERIES KIT ORDERING INFORMATION

ITEM NUMBER	VOLTAGE	CCT	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CRI	CUTTING
<b>HTL-RGBW-5MKIT</b>	24V DC	RGB+WW	16.4ft	240Lm/ft	4.4W/ft	IP54	90+	6.56" (167mm)

HTL-RGBW kits include: (1) 24V Plug-in Power Supply | (1) 15ft (20/2) Wire Spool | (1) In-line RF Receiver | (1) Handheld Remote | (6) HD Power Feeds | (3) HD Splice Connectors

## RGBW ACCESSORIES

ITEM NUMBER	DESCRIPTION
<b>TL-5PWR-HD</b>	6" HD Power Feed
<b>TL-5SPL-HD</b>	HD Tape to Tape Splice Connector
<b>TL-5JUMP6-HD</b>	6" HD Linking Cable
<b>TL-5JUMP24-HD</b>	24" HD Linking Cable
<b>WIRE-15-5PIN</b>	15ft (20/5) Wire Spool
<b>WIRE-CMP-100-6PIN</b>	100' (16/6) In-wall Rated Wire Spool
<b>INLINE-RGBW-CTRL</b>	Simple Select RGBW Controller
<b>SPKPL-REC-TB-5CH</b>	Spektrum+™ Smart Receiver (App Controlled)
<b>RCWY-PVC-1M</b>	1m Plastic Wire Cover Raceway



TL-5PWR-HD



TL-5SPL-HD




TL-5JUMP6-HD  
TL-5JUMP24-HD



WIRE-15-5PIN



WIRE-CMP-100-6PIN



INLINE-RGBW-CTRL



SPKPL-REC-TB-5CH



RCWY-PVC-1M

## Building an RGBW Trulux™ System?

See pages (115-118) for compatible RGBW controllers & accessories

### Trulux™ Kit Setup

