



## Features

- Ready to install kit with plug and play connection
- Features handheld remote for easy on/off operation with built-in presets
- Adjustable CCT from 2700K to 6000K, 90+ CRI
- Up to 255Lm per foot consuming only 2.9W per foot
- Cuttable every 3.94in (100mm)
- Each tape light kit has a maximum run of 16.4 feet
- Additional tape light accessories included for easy installation
- cULus Listed (dry location)

## Available CCT



2700K-6000K  
Tunable CCT

## Control Options

- Tunable CCT Controls
  - Requires Adaptive Driver + Receiver
- DMX Controls
  - Requires Adaptive Driver + DMX Receiver
- Auxiliary DMX Controls
  - Requires Adaptive Driver + DMX Receiver
- Tunable In-line Controller

## Listing / Ratings




## TRULUX™ Tunable CCT Kit

Tunable CCT tape light kits provide the components for a complete Trulux™ Lighting System. Tunable CCT tape light offers up to 255 lumens of 2700K to 6000K light per foot. This convenient kit provides an easy way to adjust your lighting to your energy level with warm whites for relaxing or cool whites for focusing.

## Technical Information

Series	HTL-TW-5MKIT
Input Voltage	24V DC
CCT	2700K-6000K Tunable CCT
CRI	90+
Wattage	Up to 2.9W per foot
Lumens	Up to 255Lm per foot
Max Run	16.4ft
Cuttable	Every 3.94in (100mm)
IP Rating	IP54 - Unjacketed
Dimmable	5-100%
Rating	cULus Listed
Rated Life	50,000 hrs

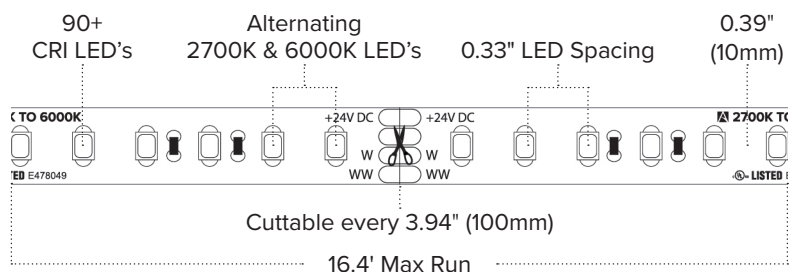




### TUNABLE CCT SERIES KIT ORDERING INFORMATION

ITEM NUMBER	VOLTAGE	CCT	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CRI	CUTTING
<b>HTL-TW-5MKIT</b>	24V DC	2700K-6000K	16.4ft	255Lm/ft	2.9W/ft	IP54	90+	3.94" (100mm)

HTL-TW-5MKIT includes: (1) 16.4ft (5M) High Output Tunable CCT Tape Light | (1) 24V 3A Plug-in Driver | (1) Handheld Remote with In-Line RF Receiver | (1) Power Supply Connection | (1) 15ft Spool of 20AWG Wire | (6) HD Tape-to-Wire Connectors | (3) HD Tape-to-Tape Connectors

### TUNABLE CCT ACCESSORIES

ITEM NUMBER	DESCRIPTION
<b>TL-4PWR-HD</b>	6' HD Power Feed
<b>TL-4SPL-HD</b>	HD Tape to Tape Splice Connector
<b>TL-4SPL-L-HD</b>	90° "L" HD Tape to Tape Splice Connector
<b>TL-4JUMP6-HD</b>	6" HD Linking Cable
<b>TL-4JUMP24-HD</b>	24" HD Linking Cable
<b>WIRE-15-4PIN</b>	15ft (20/4) Wire Spool
<b>WIRE-CMP-100-3PIN</b>	100' (16/3) In-wall Rated Wire Spool
<b>INLINE-TW-CTRL</b>	Simple Select In-line Controller (Tunable)
<b>SPKPL-REC-TB-5CH</b>	Spektrum+™ Smart Receiver (App Controlled)
<b>RCWY-PVC-1M</b>	1m Plastic Wire Cover Raceway

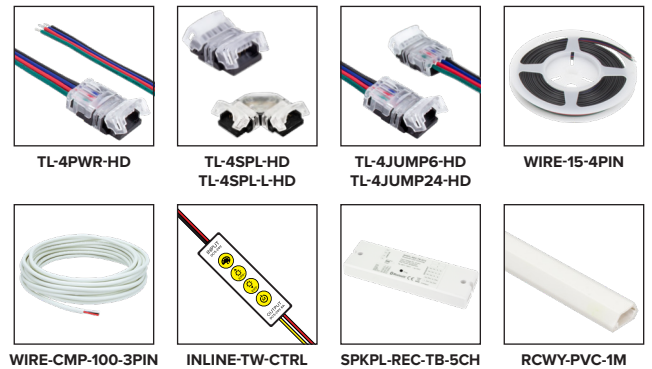

## Building a Tunable CCT Trulux™ System?

See pages (103-104) for compatible Tunable CCT controllers & accessories

### Trulux™ Kit Setup

