

SPECIFICATION


NEXLEDS®
NEXLEDS LTD



Video



2x5W



LED EMERGENCY LIGHT COMBO

NX-EMCUS636/5W

Specification

PRODUCT NAME :	LED EMERGENCY LIGHT COMBO
MODEL NO. :	NX-EMCUS636/5W
SPECIFICATION :	AC120/347V; 50/60Hz; 2*5W
WORKING TEMP :	5-30(°C)
POWER FACTOR :	0.95
CRI(RA) :	>85
COLOR :	White Color
LIGHT SOURCE :	SMD
LUMEN :	469 Lumens per head
LIFE TIME :	50000 hrs
BATTERY :	Lead Acid Battery 6V 6AH
SELF-POWERED :	90 mins
PRODUCT SIZE :	12.99*6.38*11.02inch
IP :	IP20
APPLICATION :	Shop, Hotel ... etc
WARRANTY :	5 years fixture, 3 years battery
STANDARD :	CSA
COLOR TEMP :	6500K



www.nexleds.ca



Email: sales@nexleds.ca


NEXLEDS®

NEXLEDS LTD

Feature:


- * Super Bright LED Light Source
- * 5W per head
- * Combo heads adjustable
- * 127/347V universal voltage
- * Lead Acid Battery 6V6AH
- * CSA approved 90 mins battery backup time
- * Universal Mounting: Ceiling mounting, Wall mounting and End mounting;
- * Suitable for damp locations
- * Comes with 3pcs pictograms (without arrow, with left arrow and with right arrow)

Product Dimension

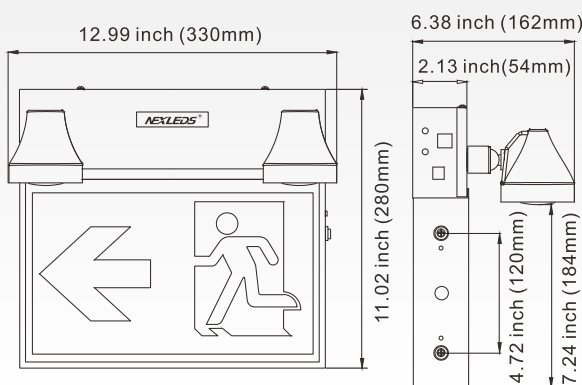

Applications:

Suitable for commercial and institutional place:
Apartment, hotel, shop, office, school, hospital
...etc.



Hotel



Shop



Office

Warning:

- Review the diagrams thoroughly before beginning.
- All electrical connections must be in accordance with local codes, ordinances and the National Electric Code.
- Disconnect power at fuse or circuit breaker before installing or servicing.
- Do not use outdoors.
- Do not mount in hazardous locations or near gas or electric heaters.
- Do not let power cords touch hot surfaces.
- Use caution when handling batteries.
- Equipment should be mounted in locations and at heights where it will not be subject to tampering by unauthorized personnel.
- The use of accessory equipment is not recommended by the manufacturer.
- Do not use this equipment other than intended use.
- All servicing should be performed by qualified personnel only.
- Allow battery to charge for 24hrs before first use. For two battery models, allow 48hrs hours.

