



## Features

- 12V AC voltage input
- 140 Lm per foot performance
- Radio frequency controlled RGBW
- Direct view linear LED neon featuring lateral bend flexibility
- UV, flame, and saltwater resistant with IP67 rating
- Comprehensive kit is designed for fast and easy installs
- Cutable every 1.4in with maximum run lengths up to 20ft
- UL Listed NeonFlex rated for outdoor use
- 50,000 hours rated life

## Available CCT/Colors



RGBW

## Listing / Ratings



WET LOCATION



IP68 SUBMERSIBLE



DIMMABLE

## NeonFlex 12V AC RF Kit

Featuring a UV resistant PU construction, the NeonFlex is designed to withstand the elements while maintaining flexibility. This kit comes ready to use for any architectural accent. Achieve high performance energy efficient lighting control in all seasons.

## Technical Information

Series	NeonFlex 12V AC
Input Voltage	12V AC
CCT	RGBW
CRI	90+
Wattage	2.9W per ft
Lumens	140Lm per ft
Beam Angle	120°
Max Run	20ft (6m)
Cutable	1.4in (35.6mm)
IP Rating	IP67
Dimmable	0-100% RF Controlled
Rated Life	50,000 hrs

Kit requires the use of a 12V AC transformer (not included)

## NEONFLEX 12V AC RF KIT ORDERING INFORMATION


ITEM NUMBER	VOLTAGE	CCT	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CRI	CUTTING
RF-NFL-RGBW-12VAC-6MKIT	12V AC	RGBW	20ft (6m)	140Lm/ft	2.9W/ft	IP67	90+ (White)	1.4" (35.6mm)

Includes: (1) IP68 12V AC to 12V DC rectifier with 6ft bare wire lead, (1) Handheld radio frequency remote, (1) IP68 radio frequency inline LED controller/receiver with IP68 connector, (15) Aluminum "U" mounting clips, (2) end cap

**12V AC Transformer Not Included**


## NEONFLEX 12V AC RF KIT ACCESSORIES

ITEM NUMBER	DESCRIPTION
NFL-RGBW-FCHAN-1M	1M Aluminum "F" Channel



NFL-RGBW-FCHAN-1M

## NEONFLEX QUICK SET-UP

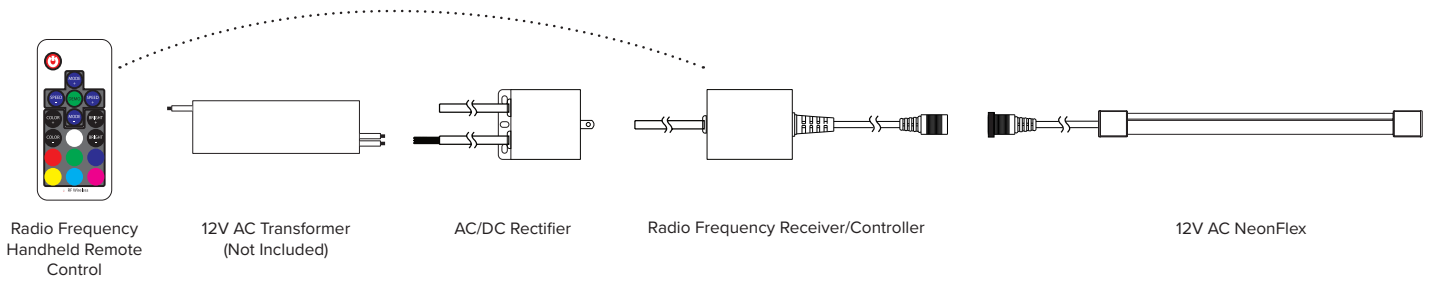

## NEONFLEX 12V AC RF KIT QUICK DIMENSIONS

