

MODEL OE-C212



WARNING

WARNING — THE INSTALLATION MUST BE CARRIED OUT BY A QUALIFIED ELECTRICIAN.

1. DO NOT let power cords touch hot surfaces
2. DO NOT install near gas or electric heaters
3. DO NOT use this LED Emergency Light other than its intended purpose
4. LED Emergency Lights can only be installed by a qualified electrician
5. This LED Emergency Light is for indoor use ONLY



Application Notice

1. After connection, another unused live wire should be covered by wire connector
2. The batteries in lamp are not fully charged when out of manufacturer, and the batteries are disconnected with the lamp
3. For first use, please connect the battery line with lamp, then fully charged for at least 24 hours
4. The "TEST" button is used to simulate outage effect. Press the button, and the lamp will turn on


CAUTION

PLEASE READ INSTRUCTION BEFORE COMMENCING INSTALLATION AND RETAIN FOR FUTURE REFERENCES.

Electrical products can cause death or injury, or damage to property.

If in any doubt about the installation or use of this product, consult a competent electrician.

INSTALLATION GUIDE

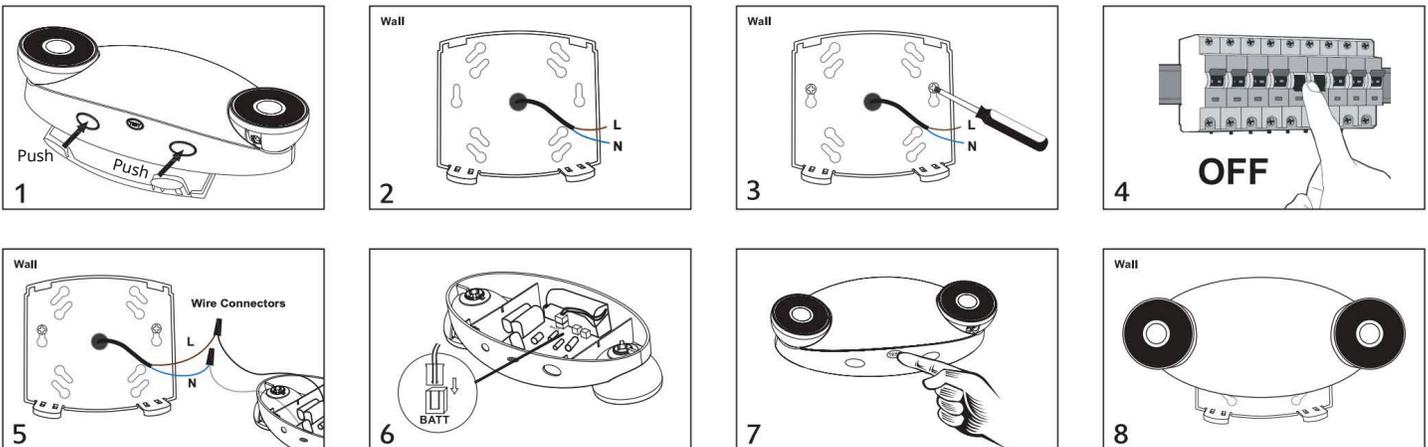

1. Press the oval buckles to release the back plate
2. Cut open the central hole on back plate to cross through the power wires of external circuit
3. Use expansion screws and steel screws to install the back plate on the wall
4. Turn OFF the external circuit to prepare power wires connection
5. Use wire connectors to connect corresponding wire with external circuit:
White wire is connected with Null Line;
Black wire or red wire is connected with Live Line according to the voltage
6. Connect battery line with the terminal "BATT" on PCB in the lamp. Turn ON the external circuit
7. Press the "TEST" button to simulate outage effect to test the illumination of lamp
8. Fix the lamp body on back plate, then installation is complete
9. We recommend professional electrician to operate the installation

MODEL OE-C212

INSTALLATION GUIDE

Lamp and Accessories Included in the Package:

1xLED Lamp 2xSteel Screws 2xExpansion Screws 3xWire Connectors

OPERATION

1. When the power failure occurs, the lamp turns ON automatically and illuminates for at least 90 minutes
2. When the power electricity is recovered, the lamp turns OFF and starts to be charged automatically
3. We recommend periodic lighting test on this lamp every month by pressing "TEST" button.
The "TEST" button is used to simulate outage effect

BATTERY REPLACEMENT

The battery replacement time is the recommended time according to UL requirements.
The battery can continue to be charged and discharged normally after the marked time.

WIRING DIAGRAM

