

SPEKTRUM+ SERIES

10in Touch Screen Control Panel

The Spektrum+ 10 inch Touch Screen Control Panel is designed to be user-friendly while also taking your smart home to the next level. Also serving as a gateway to control any Spektrum+ products, this control panel gives you the ability to manage entertainment, lighting, and security from a single device via touchscreen, physical buttons, and voice commands.

- 10 inch touchscreen to provide easy operation
- Anti-fingerprint coating for a clean, finished look
- Full control of your Spektrum+ products without your phone
- Internal gateway with optional RJ45 port for hard line Internet connection instead of WiFi
- 2 standard on/off switch inputs
- Spektrum+ Lighting app required for setup

PROJECT:

TYPE:


LOCATION:

CATALOG NUMBER:



| SPEKTRUM+ 10IN CONTROL PANEL QUICK SPECS | |
|--|-------------------------------------|
| INPUT | 100-240V AC, DC12V1A |
| OPERATING TEMP | 0°C (32°F) to 40°C (104°F) |
| CERTIFICATIONS | Indoor - Dry Location |
| WORKING HUMIDITY | 5% - 90% RH (non-condensing) |
| MOUNTING | Surface mount with wall bracket |
| SCREEN SIZE | 10in |
| SCREEN RESOLUTION | 1920x1200 |
| SCREEN TYPE | Multi-touch, Anti-fingerprint |
| AUDIO COMMUNICATION | 2 Microphones, 2 Speakers |
| LIGHT SENSING | 12C Interface, 16 Bit output |
| PROXIMITY SENSING | 25° Field of view, 0.02-1m Distance |

SPEKTRUM+ 10IN CONTROL PANEL DIMENSIONS

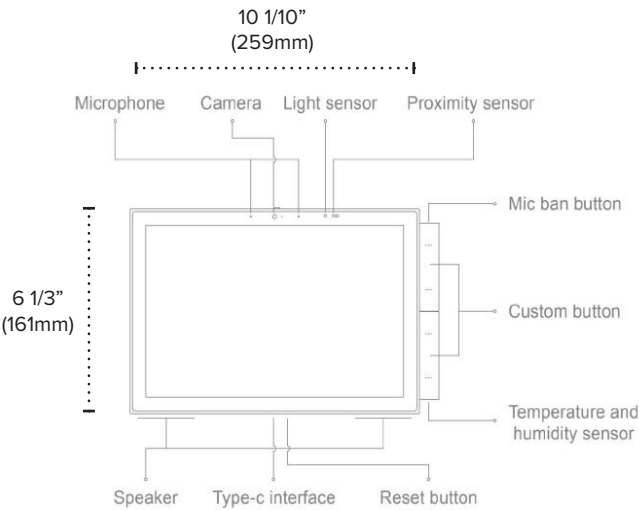

SPEKTRUM+ 10IN CONTROL PANEL QUICK SET-UP




****Spektrum+ Smart Gateway** Required for automation features and use with voice assistants

SPEKTRUM+ 10IN CONTROL PANEL ORDERING INFORMATION

| ITEM NUMBER | DESCRIPTION | FINISH | VOLTAGE |
|---------------|--------------------------|--------|--------------|
| SPKPL-CTRL-10 | Smart 10in Control Panel | Black | 120-240 V AC |

SPEKTRUM+ 10IN CONTROL PANEL INSTALLATION INFORMATION

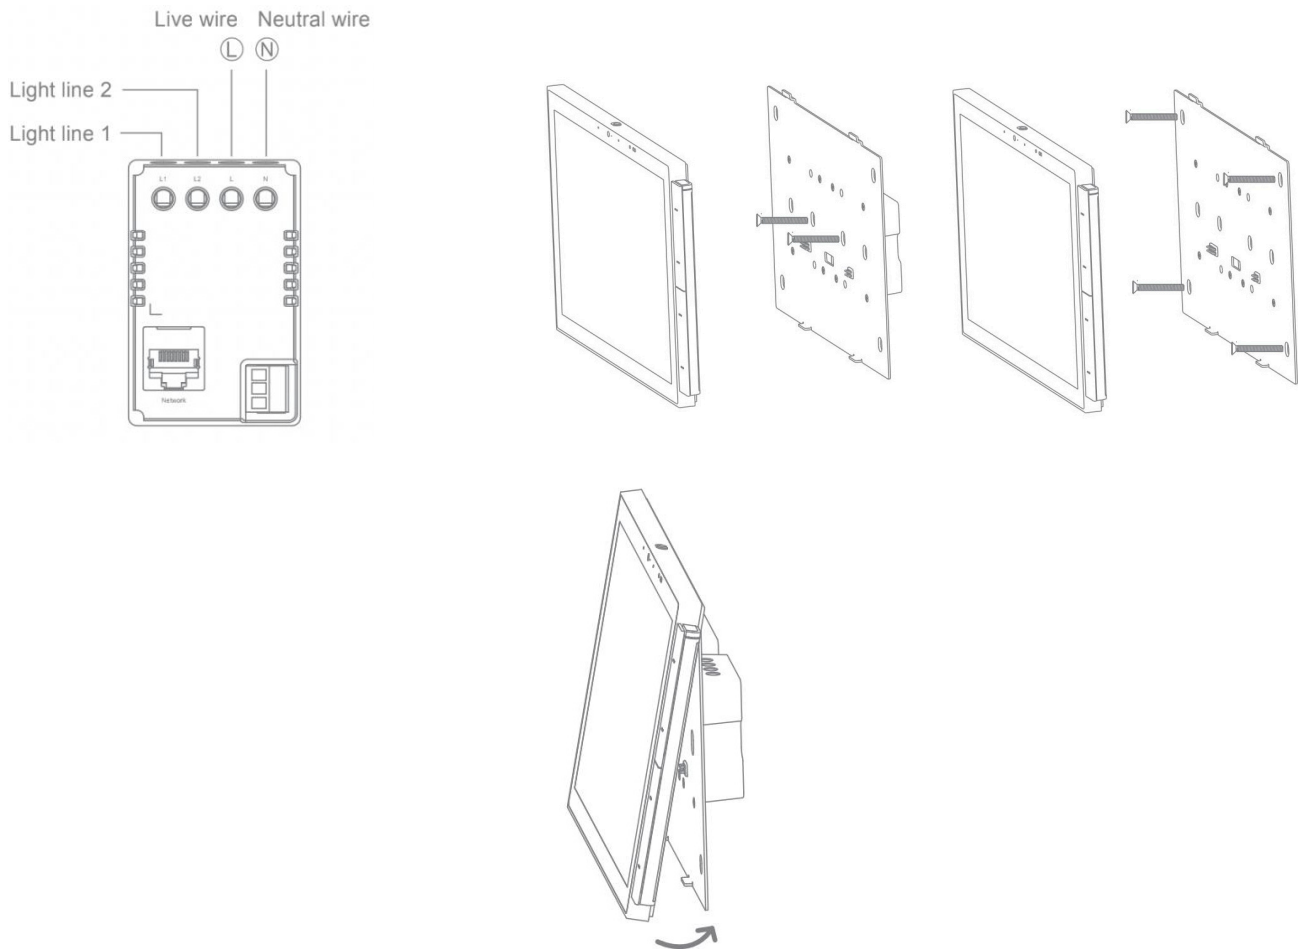

SPEKTRUM+ 10IN CONTROL PANEL INTERFACE



SPEKTRUM+ NOTES

DISTANCE OF CONTROL CAPABILITY: 25 meters (approx. 80ft)

USING THE SPEKTRUM+ SMART LIGHTING APP: Please follow the Spektrum+ Smart Lighting App guide.

SPEKTRUM+ SIGNAL ATTENUATION

All claims related to signal distance are based on clear line of sight. Any obstacles impeding direct line of sight will significantly reduce the effective distance of the product. Increasing density and thickness of obstacles will further decrease the signal distance.

Material Interference Table

| MATERIAL | POTENTIAL FOR RANGE REDUCTION |
|----------|-------------------------------|
| Wood | Low |
| Glass | Low |
| Brick | Medium |
| Marble | Medium |
| Plaster | High |
| Concrete | High |
| Metal | Very High |

Best practices/troubleshooting tactics include:

- Devices using the same RF band can interfere with each other's communication. Though they cannot communicate directly, they may be able to inject noise into another system. If you experience this, the best practice is move the inadvertent receiver(s)/transmitter(s) to an alternate location or to place a barrier between the inadvertent receiver(s)/transmitter(s).
- If a receiver must be moved out of sight, make sure that the receiver is not fully enclosed and that the receiver is placed as close to the opening as possible. The signal will be able to be reflected around a corner at reduced strength.
- If an antenna is used, the signal is strongest in directions perpendicular to the direction the antenna is pointing.
- A cellphone camera can be used to test if an IR remote is transmitting a signal. Even through the infrared band is invisible to humans, the cellphone camera will pick up the IR light and display it on the screen as either a red or white light. If pressing a button does not show a light on the cellphone screen, the batteries are most likely dead and need to be replaced.

SPEKTRUM+ MAXIMUM CONSIDERATIONS (IN APP)

| ITEM | QUANTITY |
|--------------------------------------|------------------------|
| SIMULTANEOUS LOGINS PER ACCOUNT | 200 |
| DEVICES IN (1) APP ACCOUNT | 20 homes * 200 devices |
| HOMES PER ACCOUNT | 20 |
| DEVICES IN A NETWORK/FAMILY/HOME | 200 |
| MEMBERS PER HOME | 20 |
| ROOMS PER HOME | 20 |
| DEVICES PER ROOM | 50 |
| DEVICES PER GROUP | 100 |
| DEVICE GROUPS PER HOME | 20 |
| DEVICES LINKED TO A SINGLE GATEWAY | 128 |
| DEVICES LINKED TO A SINGLE REMOTE | 40 |
| SCHEDULES PER DEVICE | 30 |
| SCENES IN A HOME | 100 |
| AUTOMATIONS IN A HOME | 100 |
| ACTIONS IN A SCENE | 150 |
| ACTIONS IN A AUTOMATION SCENE | 150 |
| CONDITIONS IN AN AUTOMATION SCENE | 10 |
| USER THAT CAN SHARE A DEVICE GROUP | 20 |
| USERS THAT CAN SHARE A SINGLE DEVICE | 20 |
| HOMES THAT (1) APP ACCOUNT CAN JOIN | 20 |



AMERICAN LIGHTING WARRANTY

LIMITED WARRANTY FOR LED PRODUCTS: 3 YEARS

LIMITED PRODUCT WARRANTY

Our products are warranted to be free from defects in material and workmanship for the warranty period listed. Warranty periods begin from the date of shipment from American Lighting Inc's warehouse to the original purchaser. Products that prove to be defective during their specific warranty period will be either repaired or replaced, at the sole discretion of American Lighting Inc. Claims for defective products must be submitted in writing to American Lighting Inc's RGA Department within the warranty period. Upon approval of such return, American Lighting Inc reserves the right to inspect the product for misuse or abuse. Claims for indirect or consequential damages or for product that, in American Lighting Inc's opinion, has been misused will be denied. This is a warranty of product reliability only and not a warranty of merchantability or fitness for a particular purpose. American Lighting Inc shall have no liability whatsoever in any event for payment of incidental or consequential damages, including, without limitations, installation costs and/or damages for personal injury and/or property. These products may represent a possible shock or fire hazard if improperly installed or altered in any way. This warranty does not apply to any product that has not been properly installed in accordance with current local codes and/or the National Electrical Code. Products that require a transformer, driver, or power supply must be used in conjunction with American Lighting Inc's recommended power supply to ensure safety and retain product warranty.

PRODUCT SPECIFICATIONS

For the latest product information, updates, instructions and details concerning specifications, colors, finishes, performance, installation and design, visit www.americanlighting.com. Color may vary from the color printed herein due to limitations in photographic and printing processes. American Lighting Inc. reserves the right to change product specifications without notice. Other product specifications such as color temperature, wavelength characteristics and lumen output are subject to production limitations and may vary. LED technology is changing rapidly, and not all color temperatures and performance levels can be duplicated at a later time. Best practices include purchasing 10-15% more for a particular project on the same initial order where white LED color temperatures must be maintained over project and product life. Eventual product replacement should be considered at layout and design stages. Best practices also include testing connections and product performance prior to mounting and/or installing.

AVERAGE LIFE

Average incandescent lamp life, rated life and average life are terms used to describe the number of hours at which half of the lamps have failed. For LEDs, the hours of rated life specify the point where 70% of original lumen output is reached. Below this point, the effective life is over, however, the LED may still emit light. Individual results may vary with actual environmental conditions including, but not limited to, proper installation, ambient temperature and/or input voltage fluctuations.