



VP 4848 SERIES VAPOR PROOF FIXTURE

INSTALLATION INSTRUCTIONS

For use with:

LED Vapor Proof luminaire:

VP-4848



WHAT'S IN THE BOX

- LED FIXTURE
- METAL MOUNTING BRACKETS
- WALL PLUGS & SCREWS

WHAT YOU'LL NEED

- SAFETY GLASSES
- WIRING (SJTW, 16A WG)
- WIRE CUTTERS
- WIRING SUPPLIES AS SPECIFIED BY CODE

WARNING

- Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
- Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- Do not use PVC wire to connect the luminaire.
- Do not drill holes in any part of the luminaire.

IMPORTANT


Before assembling your fixture, please make sure that you carefully read through this instruction sheet. Consider having your fixture installed by a qualified licensed electrician.

Note: The important safeguards and instructions that appear in this sheet are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution, and care are factors that cannot be built into any product. These factors must be supplied by the person(s) caring for and operating the fixture.


PREMISE LED Inc.
82-86 Carrier Drive
Toronto, ON Canada
M9W 5R1
PREMISELED.COM

INSTALLATION INSTRUCTIONS


1. Using the included mounting brackets as a guide, drill 8mm pilot holes into the wall or ceiling area where you plan to mount the fixture, then insert the expansion bolt wall plug into the hole and use the included screws to fasten the mounting brackets.

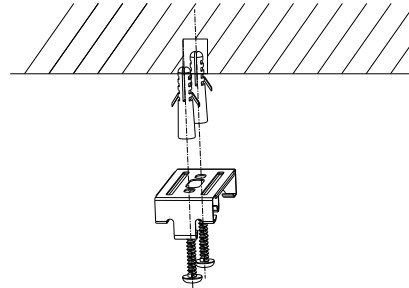

2. Use a screwdriver to open the junction box of the luminaire, then carefully pull out the terminal board plate.

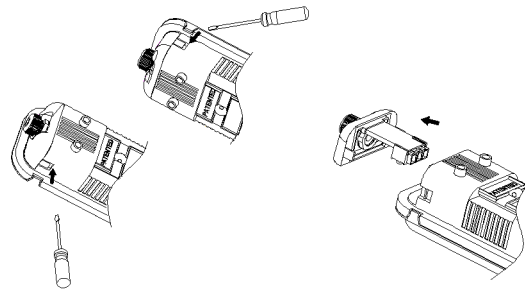


3. Loosen the strain relief, then insert your power cord through the strain relief.

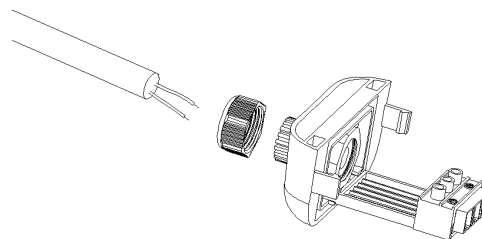


INSTALLATION INSTRUCTIONS

4. Connect the power cord by following the diagram on the right (L to L, N to N).

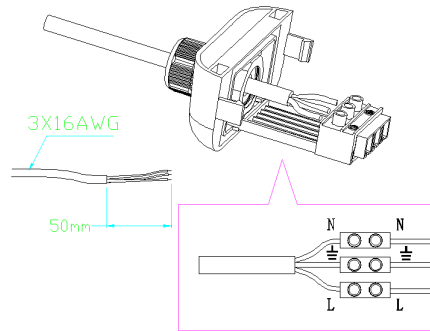

5. With the power cord connected, screw the strain relief tightly, ensure the gasket is in place, then push the terminal board plate back firmly into the luminaire body.

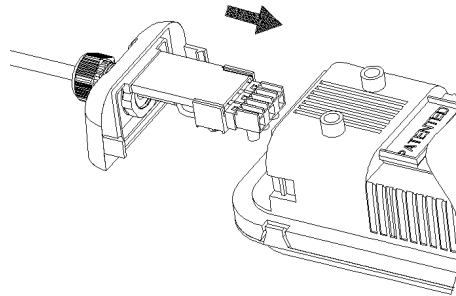

6. The luminaire is now ready to be connected to your junction box. The luminaire can be ceiling, wall, or chain suspension mounted.

