



Project	
Date	
Prepared by	
Model #	CS3-8644-3

CS3-SERIES COMMERCIAL STRIP



OVERVIEW

The CS3-Series LED Commercial Strip fixture is designed with a polycarbonate diffuser that provides impact resistance and even, low glare light. Combine this with powerful, high output LED chips, these fixtures meet today's stringent efficacy standards and bring your projects maximum energy savings.

PRODUCT HIGHLIGHTS

- Available in 2', 4' and 8' lengths
- 0-10V dimming
- ≥ 80 CRI
- Polycarbonate Diffuser
- Damp Location Rated
- 50,000 hour lifespan
- Ready for ceiling or wall mounting




OPTICAL SPECIFICATIONS

Lumen Output (lm) ₁	8382 lm	Beam Angle (°) ₁	120°
CCT (K) ₁	4000K	Projected Lifetime (L ₇₀)	50,000h
CRI (Ra) ₁	82	Chromaticity Shift	±200K
Efficacy (lm/W) ₁	130 lm/W		



ELECTRICAL SPECIFICATIONS

Power	64W	Current Draw at 120V _{AC} (A) ₂	0.56A
Apparent Power (VA)	63.1VA	Current Draw at 208V _{AC} (A) ₂	0.33A
System Wattage (W)	64.45 W	Current Draw at 240V _{AC} (A) ₂	0.28A
Input Voltage	100-347V	Current Draw at 277V _{AC} (A) ₂	0.24A
Replacement For	2 lamp 8FT T12	Current Draw at 347V _{AC} (A) ₂	0.19A

PRODUCT DIMENSIONS

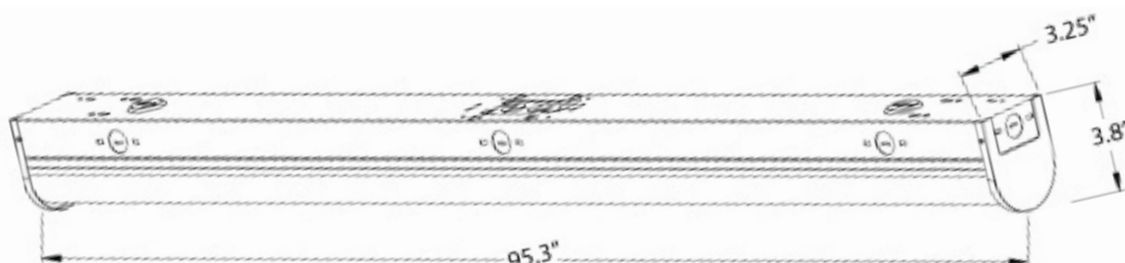

CONSTRUCTION		LED AND DRIVER SPECIFICATIONS	
Housing Material	Iron	LED Type	SMD2835
Housing Color	White	Dimmable	Yes, 0-10V
Lens Material	Polycarbonate (PC)	Output Voltage (VDC)	30-48 VDC
Dimensions (inch/mm)	96" (L) x 3.25" (W) x 3.8" (H) 2440mm (L) x 83mm (W) x 97mm (H)	Power Factor	0.87
Weight (kg/lbs)	3.5 kg/7.71 lb	THD	3.88%
Installation Method	Wall Mount, Ceiling Mount V-Hooks Included Back Box Plate Included	Surge Protection	2kV
Operation Range (°F/°C)	-30°C to 50°C / -22°F to 122°F	Inrush Current (A)	30A
Warranty	10 years	Driver Class	Class 2
APPROVALS AND LISTINGS			
DLC Premium	PROSYVWD	UTL/ETL	cETLus
CANDELA		ILLUMINANCE AT A DISTANCE	

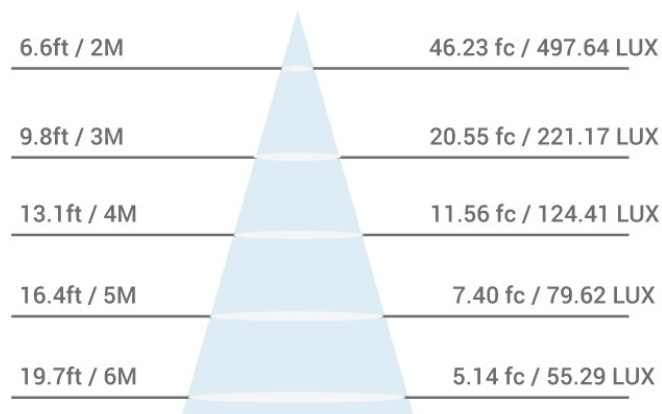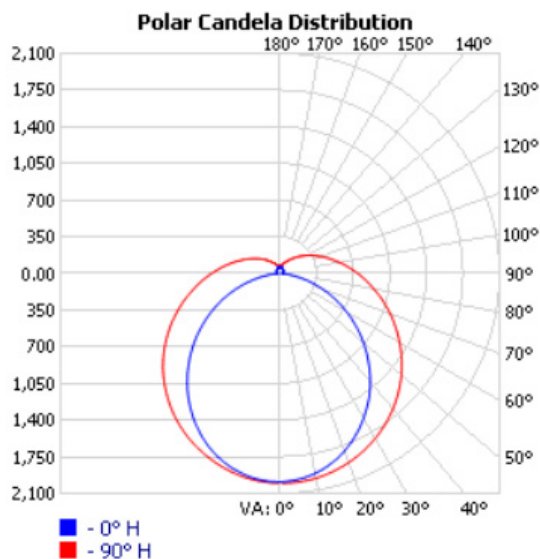

OPTIONAL ACCESSORIES		
	CS3-8WG	Wire Guard for 8 Foot Commercial Strips

1. Due to the special conditions of manufacturing, the typical data of optical specifications can only reflect statistical figures and do not necessarily correspond to the actual parameters of each single product which could differ from the typical data.
2. Exceeding maximum ratings for input voltage and current will cause hazardous overload and will likely destroy the LED fixture.
3. Refer to Warranty Terms & Conditions available at premiseled.com/warranty

Specifications and dimensions
subject to change without notice.

3401 ENTERPRISE PARKWAY
BEACHWOOD, OH USA 44122

80-86 CARRIER DRIVE
TORONTO, ON CANADA M9W 5R1

PRODUCT KEY

CS3	-				-	3	-		Adders
Product Series			Wattage			Voltage			
			☐ 20 ☐ 35 ☐ 64 ☐ 90			☐ 3 - 100-347V			
				CCT					
		Length		☐ 4 - 4000K ☐ 5 - 5000K					
		☐ 2 - 24" ☐ 4 - 48" ☐ 8 - 96"							

Example: CS3-2204-3-W18640N03M1

FACTORY INSTALLED ADDERS

Cord Adders

- ☐ W186xx* 18/3 White Cord, specify length

*xx denotes cord length in feet. Please indicate the cord length based on number of feet required.

Cord End Adders

- | | |
|------------------------------|-------------------------------|
| ☐ N01 | 5-15P 125V 15A Straight Plug |
| ☐ N02 | 6-15P 250V 15A Straight Plug |
| ☐ N04 | L5-15P 125V 15A Locking Plug |
| ☐ N05 | L6-15P 250V 15A Locking Plug |
| ☐ N06 | L7-15P 277V 15A Locking Plug |
| ☐ N07 | 5-20P 125V 20A Straight Plug |
| ☐ N08 | 6-20P 250V 20A Straight Plug |
| ☐ N09 | 7-20P 277V 20A Straight Plug |
| ☐ N10 | L5-20P 125V 20A Locking Plug |
| ☐ N11 | L6-20P 250V 20A Locking Plug |
| ☐ N12 | L7-20P 277V 20A Locking Plug |
| ☐ N13 | L24-20P 347V 20A Locking Plug |

Motion Sensor Adders


- | | |
|-----------------------------|---------------------------|
| ☐ M1 | PIR Motion Sensor |
| ☐ M4 | 120-277V Microwave Sensor |
| ☐ M5 | 347-480V Microwave Sensor |

Emergency Battery Adders

- ☐ EB1 8W Emergency Battery Backup

Cord and Sensor Installation Position

When ordering, please specify the knockout positions for cords and sensors.

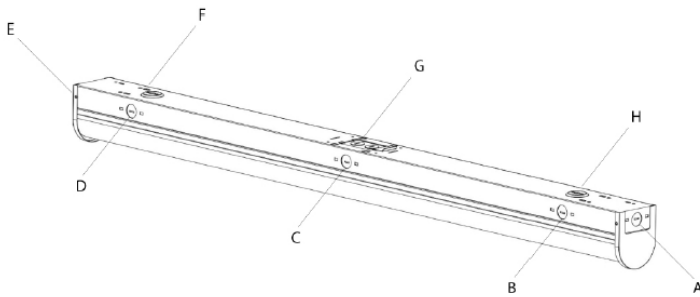

1. Due to the special conditions of manufacturing, the typical data of optical specifications can only reflect statistical figures and do not necessarily correspond to the actual parameters of each single product which could differ from the typical data.
 2. Exceeding maximum ratings for input voltage and current will cause hazardous overload and will likely destroy the LED fixture.
 3. Refer to Warranty Terms & Conditions available at premiseled.com/warranty