

# **RK1-SERIES 4FT LED LINEAR RETROFIT KITS**



Project	
Date	
Prepared by	
Model #	RK1-24464-3

# **OVERVIEW**

The RK1 Series LED Linear Retrofit Kit is the easiest and most versatile fluorescent bulb retrofit solution: a two-piece magnetic LED strip and driver kit that attaches directly to any existing linear fixture and bypasses the ballast for a quick installation.

The RK1 uses the housing of the existing fixture to limit excess waste and does not require above ceiling access to install. They are the fastest, most efficient way to upgrade fluorescent linear fixtures to long-lasting LED lighting.

# **PRODUCT HIGHLIGHTS**

- 110 lm/W delivered lumens
- High strength magnetic strips on LED tubes and driver for quick and painless install
- Use existing troffer fixture, no need to replace or dispose of fixture













OPTICAL SPECIFICATIONS					
Lumen Output (lm) <sub>1</sub>	5,047 lm	Beam Angle (°) 1	110°		
CCT (K) <sub>1</sub>	4000K	Lumen Maintenance (L <sub>70</sub> )	>54,000 hrs		
CRI (Ra) <sub>1</sub>	80+	<b>Chromaticity Shift (K)</b>	±275K		
Efficacy (lm/W) <sub>1</sub>	110 lm/W				
ELECTRICAL SPECIFICATIONS					
Power	46W	Current Draw at 120 $V_{\rm AC}$ (A) $_{\rm 2}$	0.460A		
Apparent Power (VA)	51VA	Current Draw at 208 $V_{AC}$ (A) $_2$	0.270A		
System Wattage (W)	46W	Current Draw at 240 $V_{\rm AC}$ (A) $_{\rm 2}$	0.230A		
Input Voltage (VAC)	120-347V	Current Draw at 277 $V_{\rm AC}$ (A) $_{\rm 2}$	0.200A		
Output Voltage (VDC)	25-42VDC	Current Draw at 347V <sub>AC</sub> (A) <sub>2</sub>	0.160A		

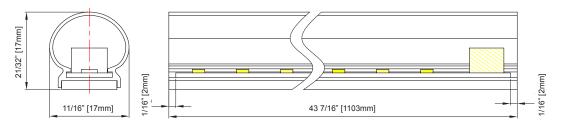

CONSTRUCTION						
Lens Material	Polycarbonate	Installation Method	Magnetic			
Weight	0.63 kg / 1.39 lbs	Operation Range (°F/°C)	-25°C to 40°C / -13°F to 104°F			
Dimensions (inch/mm)	L: 43 7/16" (1103mm) W: 11/16" (17mm) H: 21/32" (17mm)	Warranty	5 years			
APPROVALS AND LISTINGS						
<b>Damp Location Rated</b>	Yes	IP Rating	IP20			
DLC Standard	PL57GY7BBNI8	UL/ETL Listed	cETLus			
	LED AND DRIVER SPECIFICATIONS					
LED Type	2835	Inrush Current (A)	60A			
Dimmable	Yes (0-10V)	Driver Class	Class 2			
Power Factor	>0.9	Surge Protection (kV)	1kV (L-N)			
ACCESSORIES						
RK1-CAPS	End caps that close up the end of the RK1 strips	RK1-CLIPS	Metal mounting clips that click onto the RK1 strips			

### **CANDELA**

# **ILLUMINANCE AT A DISTANCE**



ILLUMINANCE AT A DISTANCE					
	CENTER BEAM	BEAM SPREAD(FT)		FIELD SPREAD(FT)	
HEIGHT(FT)	FOOTCANDLE	HORIZONTAL	VERTICAL	HORIZONTAL	VERTICAL
4.00	131.18 FC	10.0	8.7	41.2	34.4
8.00	32.80 FC	20.0	17.4	82.3	68.7
12.00	14.58 FC	30.0	26.1	123.5	103.1
16.00	8.20 FC	40.0	34.8	164.7	137.4
20.00	5.25 FC	50.0	43.5	205.8	171.8
		BEAM ANGLE		FIELD A	NGLE
		102.7°	94.8°	158.0°	153.8°

# **PRODUCT KEY**

Product Series	Strip and Length	Wattage	ССТ	Voltage	
RK1 -				- 3	Example: RK1-22254-3
	☐ <b>22</b> : 2 Strips x 2ft ☐ <b>24</b> : 2 Strips x 4ft	□ *25 : 25W □ **32 : 32W □ **46 : 46W	☐ <b>4</b> : 4000K ☐ <b>5</b> : 5000K	☐ <b>3</b> : 120-347V	

### \*25 option available in 2ft length only. \*\*32 & 46 options available in 4ft length only.

- 1. Due to the special conditions of manufacturing, the typical data of optical specifications can only reflect statistical figures and do not necessarily correspond to the actual parameters of each single product which could differ from the typical data.
- 2. Exceeding maximum ratings for input voltage and current will cause hazardous overload and will likely destroy the LED fixture.
- 3. Refer to Warranty Terms & Conditions available at premiseled.com/warranty