
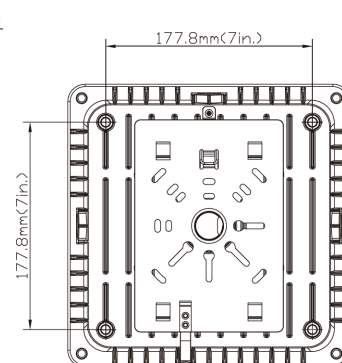
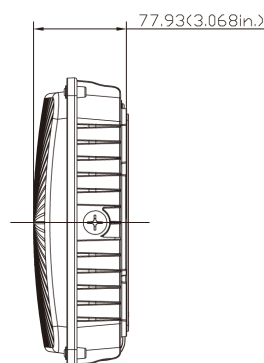


CANOPY LIGHT

ULTRA-THIN PROFILE

VERSIONS 3, 4

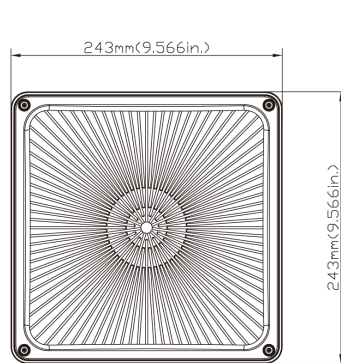


SPECIFICATIONS

Ultra-Thin Profile
Suitable for Wet Locations
Robust Die-Cast Aluminium Casing
Heat-Resistant Poly-Carbonate Lens
Colour Rendering Index: >80
Functioning Temperature:
V3, V4: -20°C to 40°C
V5: -40°C to 40°C




AVAILABILITY

100-277VAC / 347VAC
40W / 45W / 60W
4000K




 This is a STOCK item:
Look for our Same Day Shipping icon for all products that ship out on the same day (orders must be placed before 3pm EST)

 Full ies File Available on Request

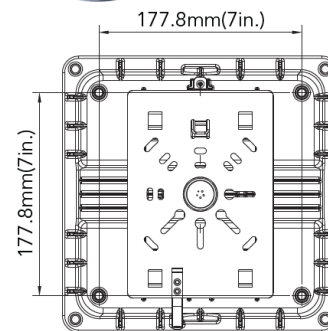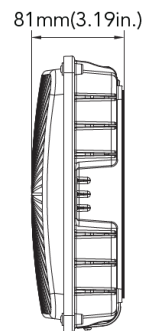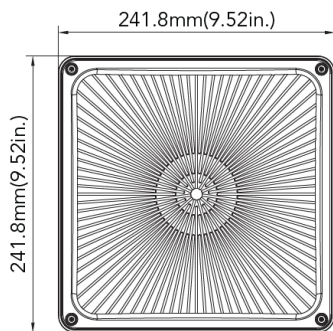VERSION 5



ORDERING INFORMATION

SERIES	INPUT VOLTAGE	POWER (WATTS)	EQUIVALENT TO (WATTS)	LUMENS	COLOR TEMP	MODEL NUMBER	ORDERING CODE
CANOPY LIGHT	100-277VAC	40W	175W	5350	4000K	CAN12R0027V40W-40KDY-V5	CL-40W-40K-V5 
		60W	250W	7800	4000K	CAN12R0027V60W-40KDY-V5	CL-60W-40K-V5 
	347VAC	45W	175W	4100	4000K	CL-40K-V3-45W-347V	CL-40K-V3-45W-347V 
		60W	250W	7800	4000K	CL-40K-V4-60W-347V	CL-40K-V4-60W-347V 