

Date: _____ Project: _____
 Prepared for: _____ Type: _____
 Comments: _____

LED EMERGENCY REMOTE HEAD

SINGLE HEAD | DOUBLE HEAD



LED Emergency Remote Head
(Single Head)
EM1-1-2W-V1



LED Emergency Remote Head
(Double Head)
EM1-2-4W-V1

SPECIFICATIONS

Designed for Use with
Emergency Battery Units
Surface-Mount
Adjustable Tilt & 180° Rotation
Input Voltage: 5-12VDC
IP40 - Suitable for Damp Locations
Functioning Temperature: 5°C to 30°C

AVAILABILITY



Single-Head / Double-Head
5000K
5-12VDC




*This icon indicates a STOCK item:
Look for this Same Day Shipping icon below in
'Ordering Information' for products that ship on
the same day (orders placed before 3pm)
from Montreal, Quebec or Calgary, Alberta

DIMENSIONS

EM1-1-2W-V1



EM1-2-4W-V1

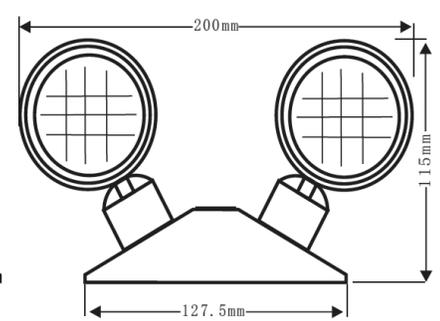

ORDERING INFORMATION

SERIES	HEADS	POWER (WATTS)	LUMENS	COLOR TEMPERATURE	MODEL NUMBER
EMERGENCY LED REMOTE HEADS	SINGLE-HEAD	2W	250	5000K	EM1-1-2W-V1
	DOUBLE-HEAD	4W	2 X 250	5000K	EM1-2-4W-V1

Date:	Project:
Prepared for:	Type:
Comments:	

LED EMERGENCY REMOTE HEAD

SINGLE HEAD | DOUBLE HEAD



LED Emergency Remote Head
(Single Head)
EM1-1-7W-V1



LED Emergency Remote Head
(Double Head)
EM1-2-14W-V1



5 Years



Lifetime
50 000 hours



IP40
Suitable for use in
damp locations



SPECIFICATIONS

Designed for Use with
Emergency Battery Units
Surface-Mount

Adjustable Tilt & 180° Rotation

Input Voltage: 6-12VDC

IP40 - Suitable for Damp Locations

Functioning Temperature: 5°C to 30°C

AVAILABILITY

Single-Head / Double-Head

6000K-6500K

6-12VDC






*This icon indicates a STOCK item:
Look for this Same Day Shipping icon below in
'Ordering Information' for products that ship on
the same day (orders placed before 3pm)
from Montreal, Quebec / Calgary, Alberta

DIMENSIONS

EM1-1-7W-V1

EM1-2-14W-V1

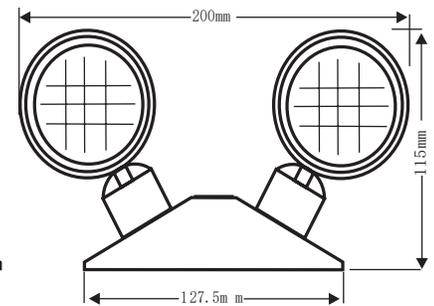

ORDERING INFORMATION

SERIES	HEADS	POWER (WATTS)	LUMENS	COLOR TEMPERATURE	MODEL NUMBER
EMERGENCY LED REMOTE HEADS	SINGLE-HEAD	7W	440	6000K-6500K	EM1-1-7W-V1
	DOUBLE-HEAD	14W	2 X 440	6000K-6500K	EM1-2-14W-V1