

Date:	Project:
Prepared for:	Type:
Comments:	

FLEXITUBE UNIFORM LIGHTING

IP65 | NO SPOTS




SPECIFICATIONS

Uniform Light Output (No Spots)
3M Peel Off Adhesive Tape for Easy Installation
Flexible Silicone Finish
Color Rendering Index: >80
Operating Temperature: -50°C to 40°C
Compatible with Square Extrusions (Page 25)
Max Length per Run: 32FT
Only Available By Inch

AVAILABILITY

5W
3000K / 4000K
24VDC


 *This icon indicates a STOCK item: Look for this Same Day Shipping icon below in 'Ordering Information' for products that ship out on the same day (orders must be placed before 3pm EST)

Shipping speed may vary based on order size




Full spec File Available on Request


ORDERING INFORMATION

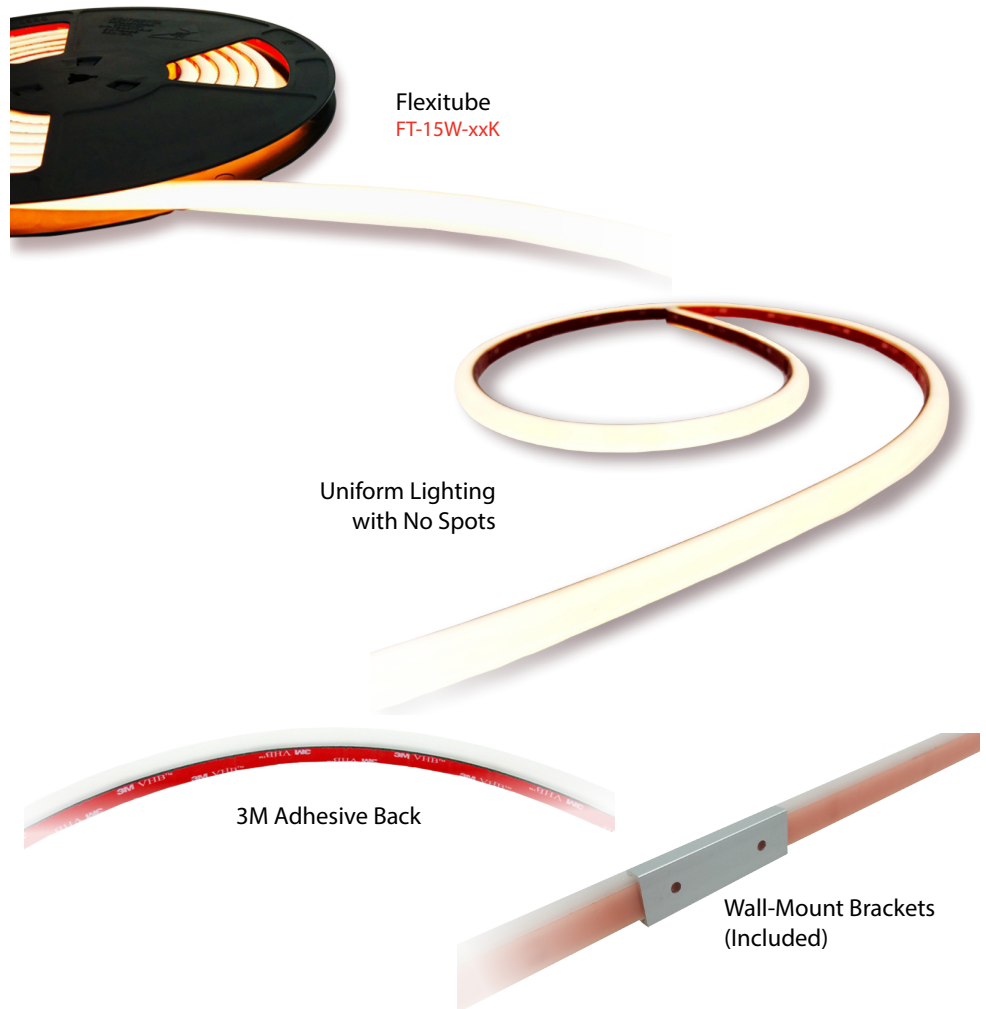




DIMENSIONS



FT-05W-xxK-IN



FT-05W-RGB-IN

SERIES	INPUT VOLTAGE	POWER/FT (WATTS)	EQUIVALENT TO (WATTS)	COLOR TEMP	LUMENS/FT	MODEL NUMBER
FLEXITUBE	24VDC	5	12.5	3000K	425	FT-05W-30K-IN 
				4000K	425	FT-05W-40K-IN 
				RGB	160	FT-05W-RGB-IN 

COMPATIBLE ACCESSORIES



Remote for RGB Controller
RGBCTRL-288W-RF-V2

SERIES	MAX POWER (WATTS)	INPUT/OUTPUT VOLTAGE	MAX OUTPUT CURRENT (A)	DIMENSIONS	MODEL NUMBER
RGB RF CONTROLLER WITH REMOTE	288	24V DC	12	4.92" x 1.3" x 0.79" (125mm x 33mm x 20mm)	RGBCTRL-288W-RF-V2 