



17W LED T8 4ft. Retrofit Lamp

Order Code: LP16519



Description

Venture Lighting's T8 LED fluorescent instant start electronic ballast compatible lamp is the simplest way to upgrade an existing fluorescent fixture. Venture Lighting's LED T8 instant start ballast compatible lamp eliminates the need to rewire the existing fixture. Energy savings can be up to 40% simply by relamping. These high efficacy lamps are the ideal solution to upgrade traditional T8 and T12 fluorescent lamps.

Features & Benefits

- Operates on most instant start electronic fluorescent ballasts
- Tool less upgrade, no rewiring needed
- 5 year warranty
- Reduces energy up to 40%
- 2-3 times the life of traditional fluorescent lamps
- Free of IR and UV emissions
- Instant-on with full light output and stable lamp to lamp color
- Diffused lens provides uniform light output

Applications

- Office
- Retail
- General Illumination
- Cove Lighting
- High bay
- Cooler/Freezer case
- Display case

Notes

- The Venture T8 Lamp is designed to operate on most electronic instant start ballasts. A list of compatible ballasts can be found at VentureLighting.com
- Operating temperatures range between -4°F and 113°F (-20°C and 45°C).
- Suitable for use in dry and damp environments.
- Not intended for use with emergency light fixtures or exit lights.

Model# VL1-T8IS17-0440-AA00

Product Performance

Input Power (W)	17
Initial Lumens	1926
Lumens/Watt	113
Beam Angle (°)	180
Correlated Color Temperature (CCT)	4000K
Color Rendering Index (CRI)	80
Life Hours	50000
Operating Temperature Range	-4°F to 113°F (-20°C to 45°C)

Physical Characteristics

Base Type	G13 medium bi-pin
Overall Length (A2)	47.72" (1212mm)
Tube Length (A1)	47.24" (1200mm)
End Diameter D1	1.01" (25.6mm)
Tube Diameter D2	1.08" (27.6mm)
Pin Distance (B)	0.51" (13mm)

Electrical Characteristics

Input Voltage Range	Ballast Dependent
Driver	Internal within lamp
Power Factor	>0.90
THD	<20%

Regulatory Qualifications



cULus Listed

Model# VL1-T8IS17-0440-AA00



VENTURE
LIGHTING

Venture 17W LED T8 4ft. Retrofit Lamp

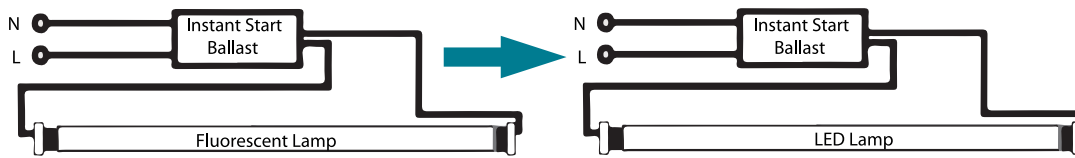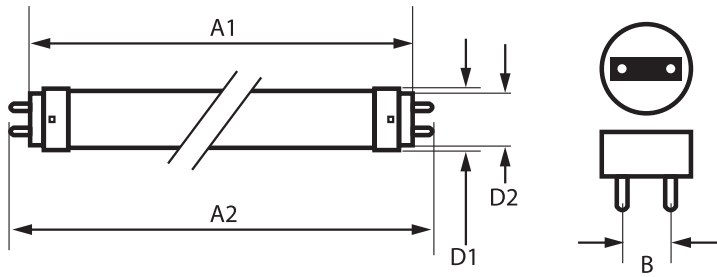

Lumens vs. Ballast Factor

Ballast Factor		Lamp Watts	System Watts	Lamp Lumens (bare)
Low	0.77 Ballast Factor	13.8	15.5	1800
Normal	0.88 Ballast Factor	15.4	17.4	2000
High	1.18 Ballast Factor	22.0	26.1	2800

(800) 451-2606
 Fax: (800) 451-2605
 2451 Enterprise Parkway East
 Twinsburg, Ohio 44087 USA
 E-mail: venture@adlt.com
VentureLighting.com

