



GET YOUR PRODUCTS FAST

Arani is committed to same day shipping on orders before 3pm (EST)*.

Date:

Project:

Prepared for:

Type:

Comments:

**LED Strips
& Extrusions**

LED STRIPS & EXTRUSIONS

AVAILABLE BY INCH

OUR 3-STEP PROCESS



1) CONTACT US

Tell us a bit about your project.



2) LET US TAKE CARE OF IT

We'll recommend the best products for you, cut them to custom lengths, and deliver them straight to you.



3) PLUG-AND-PLAY

Simply install and enjoy your LED strips!

LED STRIP OPTIONS

- Indoor LED Strip (Pages 2-4)
- Weatherproof LED Strip (Pages 2-4)
- Dot-Free LED Flexitube (Pages 5-6)
- Driverless 120V LED Strip (Page 7)

ALUMINUM EXTRUSIONS OPTIONS

- Square Extrusion (Page 8)
- V-Shape Extrusion (Page 8)
- Signature LUNAR Recessed Extrusion (Page 9)



Under Cabinet Lighting
Indoor LED Strip (4000K)
+ Square Extrusion



Cove Lighting in Ceiling
Indoor LED Strip (3000K)
+ V Shape Extrusion



Accent Lighting in Shelves
Indoor LED Strip (3000K)
+ V Shape Extrusion



Accent Lighting behind Media Stand
Indoor LED Strip (6000K)
+ Square Extrusion



Accent Lighting at Reception
Indoor LED Strip (6000K)



Lighting at Bar
Weatherproof LED Strip (RGBW)



Lighting on Patio
LED Flexitube (3000K)



Cove Lighting in Ceiling
120V LED Strip (4000K)



Recessed Lighting in Wall
LUNAR Recessed Extrusion
+ 120W Indoor LED Strip



Recessed Lighting in Wall
LUNAR Recessed Extrusion
+ 120W Indoor LED Strip



GET YOUR PRODUCTS FAST

Arani is committed to same day shipping on orders before 3pm (EST)*.

Date:

Project:

Prepared for:

Type:


Comments:



LED Strips

LED STRIPS

DIMMABLE | AVAILABLE BY INCH



SPECIFICATIONS

Available in Custom Sizes by the Inch
3M Peel Off Adhesive Tape for Easy Installation
Color Rendering Index: >90
Operating Temperature: -10°C to 40°C
Max Length per Run: 10 Meters (~32ft)

AVAILABILITY

Indoor / Outdoor

24W / 36W / 48W / 72W / 120W

3000K / 4000K / 6000K / R / G / B / RGBW

12V DC / 24V DC



*This icon indicates a STOCK item:
Look for this Same Day Shipping icon below in 'Ordering Information' for products that ship out on the same day (orders must be placed before 3pm EST)




Full ies File Available on Request



INDOOR LED STRIP
Suitable for Dry Locations (IP20)
(ST-xxW-xxK-I-IN)



IP20
Suitable for Dry Locations

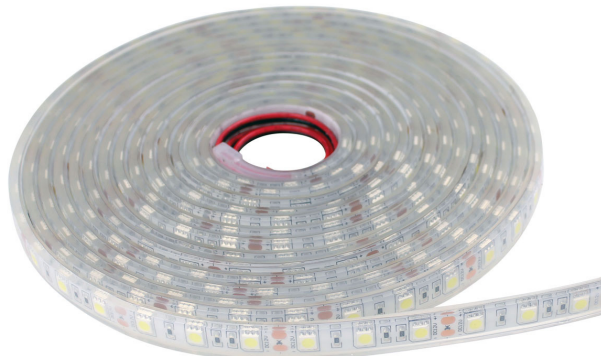


OUTDOOR WEATHERPROOF LED STRIP
Suitable for Wet Locations (IP65)
(STxxxx-xxW-xx-IN)



IP65
Suitable for Wet Locations



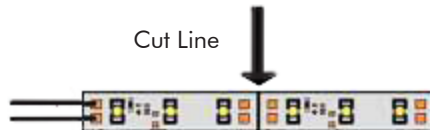
















Cut Line




**ARANI.CA — 2555 LEGER STREET,
LASALLE, QC, H8N 2V9, CANADA**

ORDERING INFORMATION







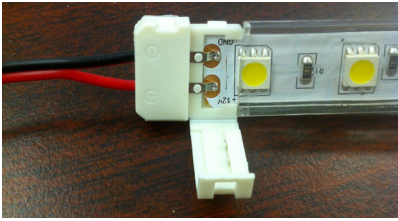








SERIES	POWER (WATTS)	INPUT VOLTAGE	POWER/FT (WATTS)	LUMENS /FT	LED QTY (SMD)	WIDTH	MIN. CUT DISTANCE	COLOR TEMP	MODEL NUMBER	
INDOOR LED STRIPS (BY INCH)	24	12VDC	1.5	150	300 x 3528	0.47"	50mm	3000K	ST-24W-30K-I-IN	
								6000K	ST-24W-60K-I-IN	
	72	12VDC	4.5	400	300 x 5050	0.47"	50mm	3000K	ST-72W-30K-I-IN	
								4000K	ST-72W-40K-I-IN	
								6000K	ST-72W-60K-I-IN	
	120	24VDC	7.5	500	1200 x 3014	0.47"	25mm	3000K	ST-120W-30K-I-IN	
OUTDOOR WEATHERPROOF LED STRIPS (BY INCH)								6000K	ST-120W-60K-I-IN	
	24	12VDC	1.5	150	300 x 3528	0.31"	50mm	3000K	ST3528-24W-WW-IN	
								6000K	ST3528-24W-CW-IN	
								RED	ST3528-24W-R-IN	
								GREEN	ST3528-24W-G-IN	
								BLUE	ST3528-24W-B-IN	
	36	12VDC	2.25	230	150 x 5050	0.47"	105mm	3000K	ST5050-36W-WW-IN	
								6000K	ST5050-36W-CW-IN	
								RGB	ST5050-36W-RGB-IN	
	48	12VDC	3	330	600 x 3528	0.31"	25mm	3000K	ST3528-48W-WW-IN	
								6000K	ST3528-48W-CW-IN	
								RED	ST3528-48W-R-IN	
								GREEN	ST3528-48W-G-IN	
	72	12VDC	4.5	400	300 x 5050	0.47"	50mm	3000K	ST5050-72W-WW-IN	
								4000K	ST5050-72W-40K-IN	
								6000K	ST5050-72W-CW-IN	
								RGB	ST5050-72W-RGB-IN	
		24VDC	4.5	400	300 x 5050	0.47"	100mm	3000K	ST-72W-30K-24V-IN	
								4000K	ST-72W-40K-24V-IN	
								RGBW	ST-72W-RGBW-24V-IN	

ACCESSORIES



ARANI's revolutionary grip-on connectors serve as an efficient alternative to soldering. Soldering is still recommended for a stronger connection.

SERIES	COMPATIBLE WITH	CONNECTOR TYPE	APPLICATION	MODEL NUMBER
3528 STRIP CONNECTORS	ST3528 LED STRIPS ST-24W-xxK-I STRIPS	2 WIRES	STRIP TO WIRE	ST-C-2-3528 
		NO WIRES	STRIP TO STRIP	ST-C-N-3528 
		L SHAPE	STRIP TO STRIP (CORNERS)	C-L-3528 
5050 STRIP CONNECTORS	ST5050 LED STRIPS ST-72W-xxK-I STRIPS	2 WIRES	STRIP TO WIRE	ST-C-2-5050 
		NO WIRES	STRIP TO STRIP	ST-C-N-5050 
		L SHAPE	STRIP TO STRIP (CORNERS)	C-L-5050 
RGB STRIP CONNECTORS	RGB LED STRIPS	4 WIRES	STRIP TO WIRE	ST-C-4 
		NO WIRES	STRIP TO STRIP	ST-C-N-RGB 
		L SHAPE	STRIP TO STRIP (CORNERS)	C-L-RGB 
LED STRIP END CAP	ALL STRIPS	END CAP	SEALING STRIP END	ST-EC-C 
LED STRIP INSTALLATION BRACKET	ALL STRIPS	BRACKET	SECURING STRIPS	AC-ST-IB 
INSTALLATION KITS	ST3528 LED STRIPS ST-24W-xxK-I STRIPS	10 INSTALLATION BRACKETS, 2 CONNECTORS (3528 2 WIRES), 4 END CAPS, 1 SILICA GEL		ST-C-3528-KIT 
	ST5050 LED STRIPS ST-72W-xxK-I STRIPS	10 INSTALLATION BRACKETS, 2 CONNECTORS (5050 2 WIRES), 4 END CAPS, 1 SILICA GEL		ST-C-5050-KIT 



FLEXITUBE UNIFORM LIGHTING

IP65 | NO SPOTS



SPECIFICATIONS

Uniform Light Output (No Spots)
3M Peel Off Adhesive Tape for Easy Installation
Flexible Silicone Finish
Color Rendering Index: >80
Operating Temperature: -50°C to 40°C
Compatible with Square Extrusions (Page 25)
Max Length per Run: 32FT
Only Available By Inch

AVAILABILITY

5W
3000K / 4000K
24VDC

*This icon indicates a STOCK item: Look for this Same Day Shipping icon below in 'Ordering Information' for products that ship out on the same day (orders must be placed before 3pm EST)
Shipping speed may vary based on order size



Full ies File Available on Request

ORDERING INFORMATION




Flexitube
FT-15W-xxK

Uniform Lighting
with No Spots




3M Adhesive Back

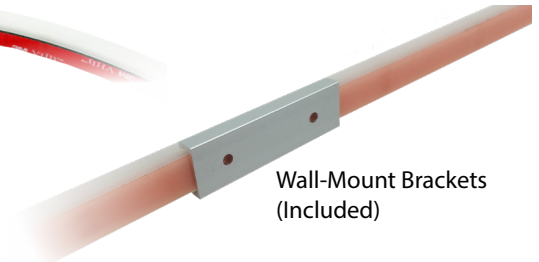


Wall-Mount Brackets
(Included)

DIMENSIONS



FT-05W-xxK-IN




FT-05W-RGB-IN

SERIES	INPUT VOLTAGE	POWER/FT (WATTS)	EQUIVALENT TO (WATTS)	COLOR TEMP	LUMENS/FT	MODEL NUMBER
FLEXITUBE	24VDC	5	12.5	3000K	425	FT-05W-30K-IN
				4000K	425	FT-05W-40K-IN
				RGB	160	FT-05W-RGB-IN

COMPATIBLE ACCESSORIES



Remote for RGB Controller
RGBCTRL-288W-RF-V2

SERIES	MAX POWER (WATTS)	INPUT/OUTPUT VOLTAGE	MAX OUTPUT CURRENT (A)	DIMENSIONS	MODEL NUMBER
RGB RF CONTROLLER WITH REMOTE	288	24V DC	12	4.92" x 1.3" x 0.79" (125mm x 33mm x 20mm)	RGBCTRL-288W-RF-V2 



120V LED STRIP

DRIVERLESS



SPECIFICATIONS

Input Voltage: 120VAC
 Cutable every 10mm (~4")
 Max Length per Run: 150ft (~45.7m)
 Length per Roll: 150ft (~45.7m)
 Color Rendering Index: >80
 Operating Temperature: -40°C to 40°C
 Available in Custom Sizes by the Inch

AVAILABILITY

3W
 3000K / 4000K
 120VAC



*This icon indicates a STOCK item:
 Look for this Same Day Shipping icon below in
 'Ordering Information' for products that ship out
 on the same day (orders must be placed before
 3pm EST)



120V LED Strip + 4ft AC Power Cord
 ST-120V-3W-xxK + ST-C-120V-WI
 (Length of 4ft power cord not customizable)

CAUTION - ELECTRIC SHOCK HAZARD



Installation must be done by a certified electrician with knowledge of this product. Risk of fire and electric shock - do not cut or modify the product. Any modification to the product (including but not limited to: cutting the product or rewiring the product) is done at your own risk, and voids the limited warranty. Arani recommends using our Custom Cutting service to receive this product pre-cut by the inch. Arani is not responsible for any installations made outside of our Custom Cutting service.

ORDERING INFORMATION

SERIES	INPUT VOLTAGE	WIDTH	POWER/FT (WATTS)	LUMENS/FT	MIN. CUT DISTANCE	COLOR TEMP	MODEL NUMBER
DRIVERLESS 120V LED STRIP	120VAC	0.60"	3	250	10mm	3000K	ST-120V-3W-30K
						4000K	ST-120V-3W-40K

ACCESSORIES	APPLICATION	MODEL NUMBER
120V LED STRIP 4FT POWER CORD (AC PLUG)	STRIP TO POWER	ST-C-120V-WI
120V LED STRIP CONNECTORS	STRIP TO STRIP	ST-C-120V-CL
120V LED STRIP END CAP	SEALING STRIP END	ST-C-120V-EC
120V LED STRIP BRACKET	SECURING STRIPS	ST-C-120V-BR

Extrusions for LED Strips

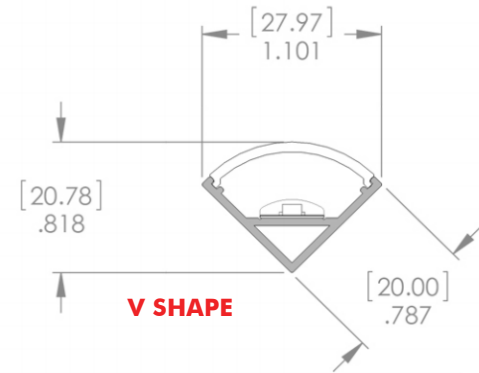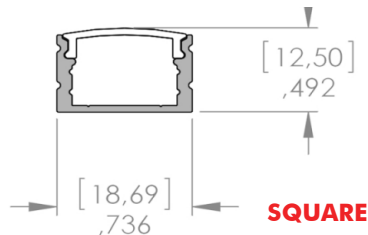

DESCRIPTION

- Arani's LED extrusions are aluminium, with your choice of two shapes, V and Square, with soft-white lenses for use with all white or coloured LED strips.

APPLICATION

- Whether for an indoor environment or a sheltered outdoor one, these extrusions are ideal for creating long runs of light up to 32 feet long, such as in hallways, alcoves, or even pendant lighting.

SPECIFICATIONS

Dimensions

- Up to 32 feet

Finish

- Aluminum

Not weatherproof.

PERFORMANCE



EXTRUSIONS

Model Number	Length	Shape
PR-S-V1	8' (2.4m)	SQUARE
PR-S-V1-IN	CUSTOM	SQUARE
PR-V-V1	8' (2.4m)	V
PR-V-V1-IN	CUSTOM	V

END CAPS

Model Number	Type	Shape
C-PR-EC-S-CL-V1	CLOSED	SQUARE
C-PR-EC-S-O-V1	OPEN	SQUARE
C-PR-EC-V-CL-V1	CLOSED	V
C-PR-EC-V-O-V1	OPEN	V

BRACKETS

Model Number	Shape
C-PR-BR-S-V1	SQUARE
C-PR-BR-V-V1	V



Date:

Project:

Prepared for:

Type:

Comments:



**LUNAR -
Signature
Extrusion**


LUNAR - SIGNATURE EXTRUSION

FULLY RECESSED | DOT-FREE


SPECIFICATIONS

Dot-Free with Arani 120W LED Strips
Fully Recesses into Gyproc/Drywall
Easy Snap-In Installation with Springs
Snap-On Frosted Lens
Robust Aluminium Body
Custom Lengths (MAX Straight Run: 25m)

AVAILABILITY

 *This item is always IN STOCK.
Shipping speed may vary based on order size.

DIMENSIONS

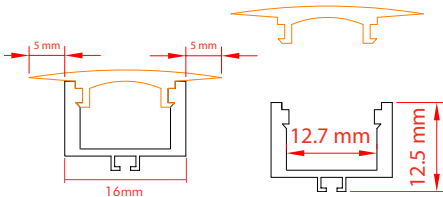


LUNAR SYSTEM

BACK VIEW




SIDE PROFILE

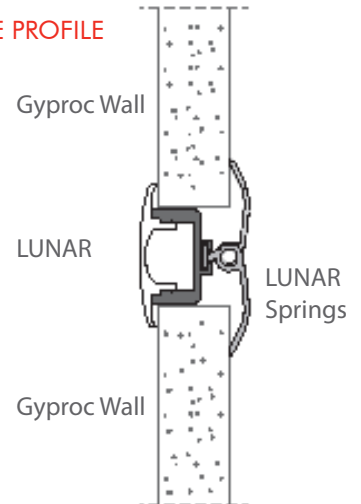

ORDERING INFORMATION

SERIES	COMPATIBLE WITH	MODEL NUMBER
LUNAR EXTRUSION	ALL STRIPS	LU-S-15-IN 
LUNAR SPRING	LUNAR EXTRUSION	LU-S-15-SP 

SERIES	INPUT VOLTAGE	POWER (WATTS)	POWER/FT (WATTS)	LUMENS /FT	LED QTY (SMD)	WIDTH	MIN. CUT DISTANCE	COLOR TEMP	MODEL NUMBER
120W INDOOR STRIP	24VDC	120	7.5	500	1200 x 3014	0.47"	25mm	3000K	ST-120W-30K-I 
								6000K	ST-120W-60K-I 