

Applications:

Tunnel (except for motor vehicle tunnel), workshop, warehouse, factory, house, building exterior, etc.

Cautions:


1. Do not use an electric generator to test the LED fixture;
2. Please abide by appropriate national, regional and local law and regulations when install this fixture;
3. Do not install the fixture when raining to lower the risk of electric shock and avoid failure.

Cautions:

1. To avoid possibility of electrical shock or fire, the installation personnel must have professional electric knowledge;
2. Wear gloves to avoid injury before installation;
3. If any smoke or spark of the wire happened, please turn off the power immediately and notify relevant personnel;
4. This fixture is available in outdoor usage, but the distance from fixture to ground should be more than 2m.

Note: Please turn off the power before adjusting the color temperature.

This installation instruction applies to the following products. Although the products vary in appearance, the installation steps are the same:

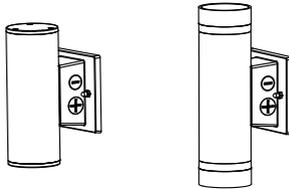


Installation procedure:


1. Turn off the power.



2. Use tools to unscrew both sides and remove mounting plates.




3. Fix the mounting plate to the junction box with the screwdriver




4. Connect the wires properly

As for the wire color of DIM+ and DIM-, pls check the light label.

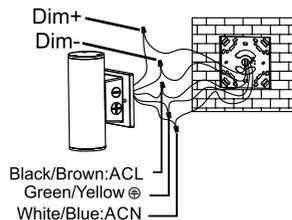

5.Lock the two end cap screws, the product is installed.




6.Make sure the installation is complete before turning on the power switch.



Photocell :

Operate as following instructions if the product is designed with below functions

SPECIAL FUNCTIONS INSTRUCTION

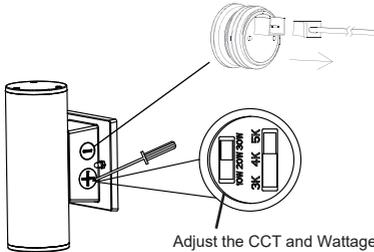

By Default the Photocell is disconnected
Connect male and female connector as picture will turn on the photocell.

Adjust the CCT and Wattage from Here

Note:Please turn off the power and colour before adjusting the wattage and CCT.

CCT adjustable instruction fixture;

- 1.The color temperature of the lamp turns to 3000K when the switch is set to 3000K;
- 2.The color temperature of the lamp turns to 4000K when the switch is set to 4000K;
- 3.The color temperature of the lamp turns to 5000K when the switch is set to 5000K;

Wattage adjustable instruction

Turn the wattage adjustable knob to a certain wattage gear, the power of the lamp will change to the corresponding wattage.

Adjustable wattage range 25%-100%.