

Date: \_\_\_\_\_ Project: \_\_\_\_\_  
Prepared for: \_\_\_\_\_ Type: \_\_\_\_\_  
Comments: \_\_\_\_\_

## WALL PACK 11


ADJUSTABLE INCLINE | IP66  
INTEGRATED PHOTOCELL



WP11-27W-xxK-V2



WP11-67W-xxK-V2

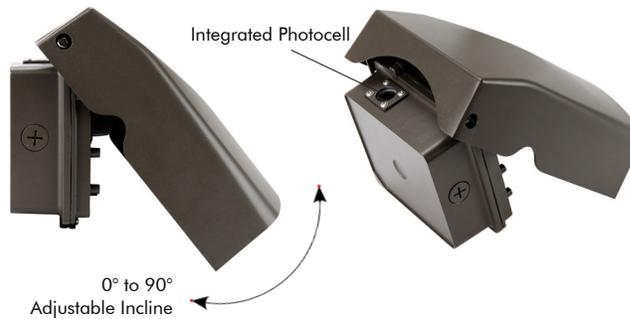

- SPECIFICATIONS**
- 0° to 90° Adjustable Incline
  - IP66 - Suitable for Wet Locations
  - Integrated Photocell Technology
  - Robust Die-Cast Aluminium Casing
  - Robust Plastic Lens
  - Input Voltage: 120-277V AC
  - Colour Rendering Index: >75
  - Functioning Temperature: -40°C to 40°C


- AVAILABILITY**
- 27W / 67W
  - 4000K / 5000K
  - 120-277VAC

This is a STOCK item:  
Look for our Same Day Shipping icon for all products that ship out on the same day (orders must be placed before 3pm EST)


Full ies File Available on Request

**DIMENSIONS**

WP11-27W-xxK-V2

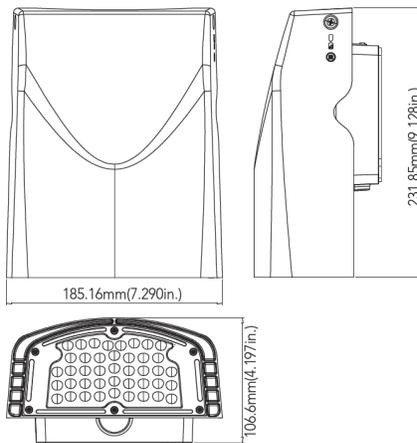


WP11-67W-xxK-V2

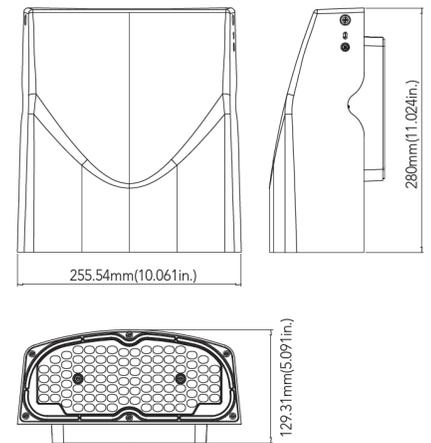

**ORDERING INFORMATION**

SERIES	POWER (WATTS)	EQUIVALENT TO (WATTS)	LUMENS	COLOR TEMP	MODEL NO.	ORDERING CODE
WALL PACK 11 VERSION 2	27	100	3600	4000K	WAL06R0027W-40KDP0-V2	WP11-27W-40K-V2
				5000K	WAL06R0027W-50KDP0-V2	WP11-27W-50K-V2
	67	250	8900	4000K	WAL06R0067W-40KDP0-V2	WP11-67W-40K-V2
				5000K	WAL06R0067W-50KDP0-V2	WP11-67W-50K-V2

## PHOTOMETRIC REPORT (27W)

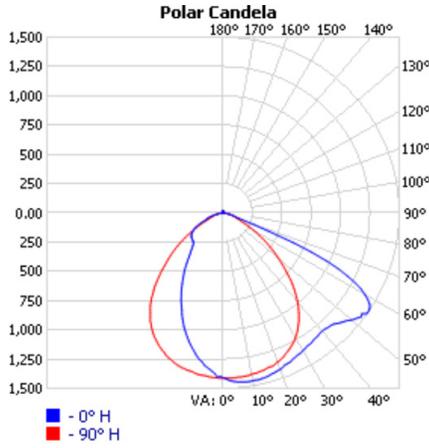

Zone	Lumens	% Lamp	% Luminaire
0-30	1,065.6	29.6%	29.6%
0-40	1,714.1	47.6%	47.6%
0-60	2,994.9	83.1%	83.1%
60-90	574.1	15.9%	15.9%
70-100	133.0	3.7%	3.7%
90-120	8.5	0.2%	0.2%
0-90	3,569.0	99.9%	99.1%
90-180	34.0	0.9%	0.9%
0-180	3,602.9	100%	100%


Roadway Summary	
Cutoff Classification:	CUTOFF
Distribution:	TYPE III, VERY SHORT
Max Cd, 90 Deg Vert:	2.8
Max Cd, 80 to <90 Deg:	45.5
Downward Street Side:	2,410.4 Lumens, 66.9% Lamp
Downward House Side:	1,159.0 Lumens, 32.2% Lamp
Downward Total:	3,569.4 Lumens, 99.1% Lamp
Upward Street Side:	12.0 Lumens, 0.3% Lamp
Upward House Side:	22.0 Lumens, 0.6% Lamp
Upward Total:	34.0 Lumens, 0.9% Lamp
Total Lumens:	3,603.4 Lumens, 100% Lamp

Lumens Per Zone					
0-10	132.9	3.7%	90-100	1.6	0%
10-20	376.0	10.4%	100-110	2.8	0.1%
20-30	556.6	15.4%	110-120	4.1	0.1%
30-40	648.5	18.0%	120-130	5.1	0.1%
40-50	654.9	18.2%	130-140	5.7	0.2%
50-60	625.8	17.4%	140-150	5.7	0.2%
60-70	442.7	12.3%	150-160	4.7	0.1%
70-80	116.1	3.2%	160-170	3.1	0.1%
80-90	15.4	0.4%	170-180	1.1	0%

Candela Table - Type C																	
	0	30	60	90	120	150	180	210	240	270	300	330	360				
0	1407	1411	1410	1410	1413	1414	1407	1411	1410	1410	1413	1414	1407				
5	1449	1442	1432	1408	1377	1353	1340	1350	1371	1405	1434	1446	1449				
10	1456	1460	1449	1398	1332	1280	1252	1272	1320	1390	1436	1455	1456				
15	1448	1464	1460	1384	1270	1176	1133	1163	1252	1368	1445	1454	1448				
20	1422	1459	1472	1355	1184	1048	996	1035	1167	1326	1441	1438	1422				
25	1388	1448	1467	1304	1078	904	846	895	1057	1268	1431	1423	1388				
30	1359	1441	1444	1231	945	752	697	743	928	1192	1409	1410	1359				
35	1333	1433	1399	1124	788	599	554	592	774	1082	1364	1409	1333				
40	1316	1431	1326	985	619	444	428	445	611	950	1294	1417	1316				
45	1340	1436	1216	815	456	342	359	332	448	778	1192	1431	1340				
50	1424	1441	1054	628	317	304	347	294	310	607	1042	1453	1424				
55	1497	1462	863	462	228	288	330	276	222	451	854	1484	1497				
60	1395	1417	705	303	196	262	291	251	188	293	701	1404	1395				
65	973	1132	519	182	168	223	222	210	162	170	515	1090	973				
70	197	611	277	117	137	162	147	154	130	112	270	515	197				
75	86	163	83	78	91	90	97	88	88	73	80	140	86				
80	39	45	36	43	38	36	38	34	38	42	36	44	39				
85	15	14	13	15	8	7	8	6	7	13	13	14	15				
90	3	2	1	0	1	2	2	2	1	0	1	2	3				
95	1	1	1	0	2	3	3	3	2	0	0	1	1				
100	1	1	1	1	3	4	4	4	3	1	1	1	1				
105	1	1	1	2	4	5	5	5	4	2	1	1	1				
110	1	1	2	2	5	6	7	6	5	2	2	1	1				
115	2	2	2	3	6	7	8	7	6	4	2	2	2				
120	2	2	3	4	6	8	9	8	7	4	3	2	2				
125	3	3	4	5	7	8	9	8	7	5	4	3	3				
130	4	4	5	6	8	9	10	9	9	6	5	4	4				
135	4	5	5	7	9	10	11	10	10	7	6	4	4				
140	5	6	6	8	10	11	12	11	10	8	6	5	5				
145	6	7	7	9	11	12	13	12	11	9	7	6	6				
150	7	7	8	9	11	12	13	13	12	9	8	7	7				
155	8	8	9	10	11	13	13	13	12	10	9	8	8				
160	9	9	10	11	12	13	13	13	12	11	10	9	9				
165	9	10	10	11	12	13	13	13	12	11	10	9	9				
170	10	10	11	12	13	13	13	13	12	11	10	10	10				
175	11	11	12	12	12	12	12	12	12	12	11	11	11				
180	12	12	12	12	12	12	12	12	12	12	12	12	12				

Full ies File Available on Request

## PHOTOMETRIC REPORT (67W)

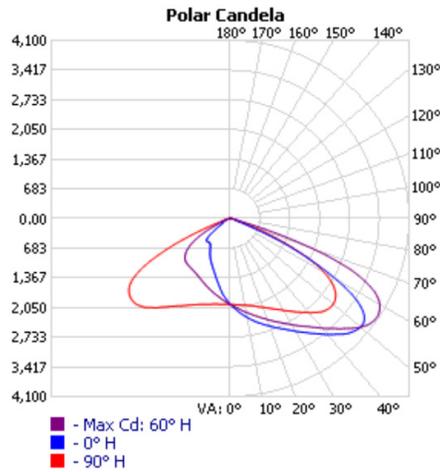

Zone	Lumens	% Lamp	% Luminaire
0-30	1,698.9	19.3%	19.3%
0-40	3,077.6	35%	35%
0-60	7,093.7	80.6%	80.6%
60-90	1,625.1	18.5%	18.5%
70-100	278.1	3.2%	3.2%
90-120	26.0	0.3%	0.3%
0-90	8,718.8	99%	99%
90-180	83.9	1%	1%
0-180	8,802.7	100%	100%

Roadway Summary	
Cutoff Classification:	CUTOFF
Distribution:	TYPE III, SHORT
Max Cd, 90 Deg Vert:	7.5
Max Cd, 80 to <90 Deg:	105.2
Downward Street Side:	6,294.0 Lumens, 71.5% Lamp
Downward House Side:	2,425.7 Lumens, 27.6% Lamp
Downward Total:	8,719.7 Lumens, 99% Lamp
Upward Street Side:	27.6 Lumens, 0.3% Lamp
Upward House Side:	56.3 Lumens, 0.6% Lamp
Upward Total:	83.9 Lumens, 1% Lamp
Total Lumens:	8,803.6 Lumens, 100% Lamp

Candela Table - Type C																	
	0	30	60	90	120	150	180	210	240	270	300	330	360				
0	1973	1973	1973	1973	1973	1973	1973	1973	1973	1973	1973	1973	1973				
5	2149	2137	2077	1990	1887	1809	1772	1804	1882	1979	2066	2132	2149				
10	2316	2301	2196	2026	1815	1620	1538	1610	1794	1999	2176	2276	2316				
15	2480	2453	2325	2083	1742	1438	1339	1424	1711	2044	2286	2432	2480				
20	2629	2598	2469	2172	1677	1281	1185	1263	1634	2103	2413	2586	2629				
25	2806	2761	2630	2288	1630	1151	1057	1129	1562	2195	2557	2736	2806				
30	2999	2942	2821	2439	1592	1044	927	1011	1502	2317	2725	2919	2999				
35	3220	3161	3032	2622	1569	940	795	903	1466	2477	2906	3125	3220				
40	3480	3430	3295	2826	1559	853	731	815	1447	2677	3140	3379	3480				
45	3746	3726	3585	3017	1537	806	744	776	1432	2863	3406	3648	3746				
50	3897	3938	3889	3074	1461	744	662	726	1355	2934	3694	3875	3897				
55	3718	3924	4051	2944	1241	593	337	585	1170	2837	3859	3837	3718				
60	2821	3382	3959	2499	882	361	207	356	831	2405	3781	3285	2821				
65	1439	2195	3410	1568	445	181	173	182	409	1421	3201	2040	1439				
70	222	955	2001	555	204	128	126	124	189	437	1731	837	222				
75	131	247	346	161	107	82	76	79	100	143	261	196	131				
80	80	105	105	82	57	38	32	35	53	76	93	87	80				
85	35	37	41	36	18	9	7	9	17	33	38	34	35				
90	7	7	5	3	5	6	5	6	6	3	5	7	7				
95	1	1	2	5	7	7	6	8	5	2	1	1	1				
100	1	2	3	7	10	10	9	10	11	8	3	1	1				
105	2	3	5	9	12	12	12	14	14	10	5	2	2				
110	2	4	6	11	15	15	15	16	17	13	6	3	2				
115	3	4	8	13	17	18	18	19	18	15	8	4	3				
120	4	6	9	15	19	20	20	21	20	17	10	5	4				
125	5	7	11	16	21	22	22	23	22	18	11	6	5				
130	6	8	12	18	22	23	23	24	24	20	12	8	6				
135	7	9	13	19	23	25	24	25	25	21	14	9	7				
140	8	10	15	20	25	26	25	27	26	21	15	10	8				
145	9	11	16	21	26	27	27	28	27	22	16	12	9				
150	11	13	17	22	26	28	28	28	27	23	17	13	11				
155	13	14	18	22	26	28	28	28	27	23	18	14	13				
160	14	16	18	22	25	27	27	27	26	23	19	16	14				
165	16	17	19	22	24	25	26	25	25	22	19	17	16				
170	18	18	20	21	23	24	24	24	23	22	19	17	18				
175	19	20	21	21	22	22	23	22	23	22	21	20	19				
180	21	21	21	21	21	21	21	21	21	21	21	21	21				

Lumens Per Zone					
0-10	188.3	2.1%	90-100	5.3	0.1%
10-20	562.3	6.4%	100-110	8.7	0.1%
20-30	948.3	10.8%	110-120	12.0	0.1%
30-40	1,378.6	15.7%	120-130	13.6	0.2%
40-50	1,884.8	21.4%	130-140	13.7	0.2%
50-60	2,131.4	24.2%	140-150	12.6	0.1%
60-70	1,352.3	15.4%	150-160	9.9	0.1%
70-80	240.3	2.7%	160-170	6.1	0.1%
80-90	32.6	0.4			