



Date:

Project:

Prepared for:

Type:

Comments:

WALL PACK 2

CLASS I LUMINAIRE | IP66



SPECIFICATIONS




Class I Luminaire
IP66 - Suitable for Wet Locations
Robust Die-Cast Aluminium Casing
Shatter Resistant Poly-Carbonate Lens
Colour Rendering Index: >75
Functioning Temperature: -40°C to 50°C

AVAILABILITY

120-277VAC / 347V
40W / 60W / 65W / 120W
4000K / 5000K



This is a STOCK item:
Look for our Same Day Shipping icon for all products that ship out on the same day (orders must be placed before 3pm EST)

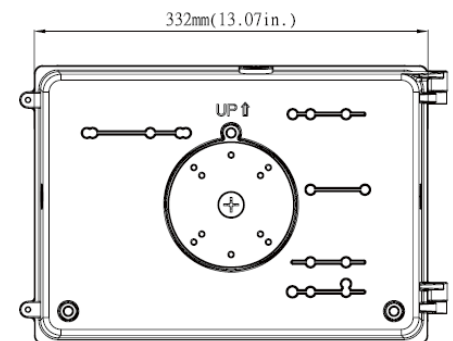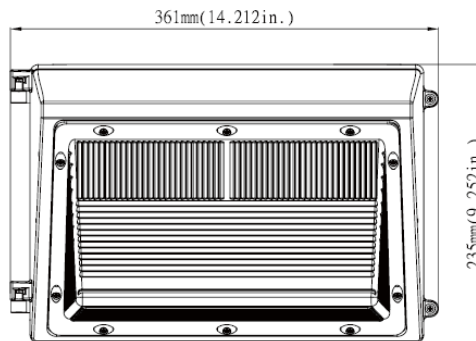

ORDERING INFORMATION

SERIES	INPUT VOLTAGE	POWER (WATTS)	EQUIVALENT TO (WATTS)	LUMENS	COLOUR	MODEL NUMBER
WALL PACK 2	120-277VAC	40	100 MH	4800	4000K	WP2-40W-40K-V3
					5000K	WP2-40W-50K-V3
		60	175 MH	7200	4000K	WP2-60W-40K-V3
					5000K	WP2-60W-50K-V3
		120	250 MH	14400	4000K	WP2-120W-40K-V3
					5000K	WP2-120W-50K-V3
	347V	65	200 MH	7900	5000K	WP2-65W-50K-V3-347V