



## WALL PACK 7

PIR SENSOR | LIGHT CONTROL |  
15% LUX STANDBY



5 Years



Lifetime  
50 000 hours



Suitable for use in  
wet locations



### SPECIFICATIONS

Suitable for Wet Locations

Colour Rendering Index: >80

Adjustable lighting direction: 350° in horizontal direction and 180° in vertical direction

Hold time: ~5sec - ~12min

Detection distance: max 10m (32ft)

Luminous flux: 2340-2730 lm

Functioning Temperature: -20°C to 45°C

### AVAILABILITY

120V

26W

3000K / 4000K / 5000K



This is a STOCK item:

Look for this Same Day Shipping icon below in 'Ordering Information' for products that ship on the same day (orders placed before 3pm) from Montreal, Quebec or Calgary, Alberta




Switch for  
Color Temperature



Settings

If with 3CCT function, choose preferred CCT by slide switch.

### DIMENSIONS

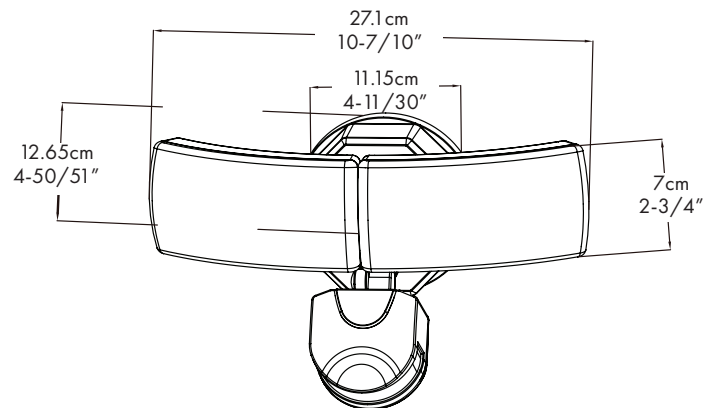

### ORDERING INFORMATION

SERIES	INPUT VOLTAGE	POWER	LUMENS	COLOUR	ORDERING NUMBER
WALL PACK 7 V2	120V	26W	2340-2730	3000K/ 4000K/ 5000K	WP7-26W-2H-VAR-BK-V2